

PIEZO INDICATOR (Panel Mounting Type)

Internal Circuitry Type

Model No.	Rated Frequency ±500(Hz)	Tone	Minimum Sound Pressure L level at 30 cm		Operating Voltage Range (VDC)		Current Consumption (mA)		Case Style		Packing Quantity (Pcs/Box)
			At Min V	At Max V	Min V	Max V	At Min V	At Max V	Side View	Bottom View	
KPE-750	3600	Continuous	70	85	4	28	2	15	F	6	50
KPE-751	3600	Fast Pulse	72	87	6	28	1	14	F	7	50
KPE-753	3600	Slow Pulse	76	92	6	28	2	17	F	7	50
KPE-755	3600	Continuous + Fast Pulse	80/75	97/87	6	28	3/2	15/13	F	8	50
KPE-757	3600	Continuous + Slow Pulse	78/75	88/87	6	28	3/3	16/14	F	8	50
KPE-750S	3600	Continuous	70	86	4	28	2	16	G	9	50
KPE-751S	3600	Fast Pulse	72	87	6	28	1	14	G	9	50
KPE-753S	3600	Slow Pulse	76	92	6	28	2	17	G	9	50
KPE-755S	3600	Continuous + Fast Pulse	79/75	92/87	6	28	3/2	16/13	H	10	50
KPE-757S	3600	Continuous + Slow Pulse	78/75	88/87	6	28	3/3	16/14	H	10	50
KPE-750P	3600	Continuous	72	88	4	28	1	15	I	11	50
KPE-751P	3600	Fast Pulse	72	87	6	28	1	14	I	11	50
KPE-753P	3600	Slow Pulse	76	92	6	28	2	17	I	11	50
KPE-755P	3600	Continuous + Fast Pulse	80/75	92/87	6	28	3/2	15/14	J	12	50
KPE-757P	3600	Continuous + Slow Pulse	78/75	88/87	6	28	3/3	15/14	J	12	50
KPE-750A	3600	Continuous	76	101	0.7	15	1	14	F	6	50
KPE-750SA	3600	Continuous	76	101	0.7	15	1	14	G	9	50
KPE-750PA	3600	Continuous	76	101	0.7	15	1	14	I	11	50

KPE-750 series fit 1.125 inch diameter opening in panels to 0.50" thick.
Or PC board mounting.

PIEZO INDICATOR (Panel Mounting Type)


Internal Circuitry Type

Shape



RoHS Compliant Available

Dimension

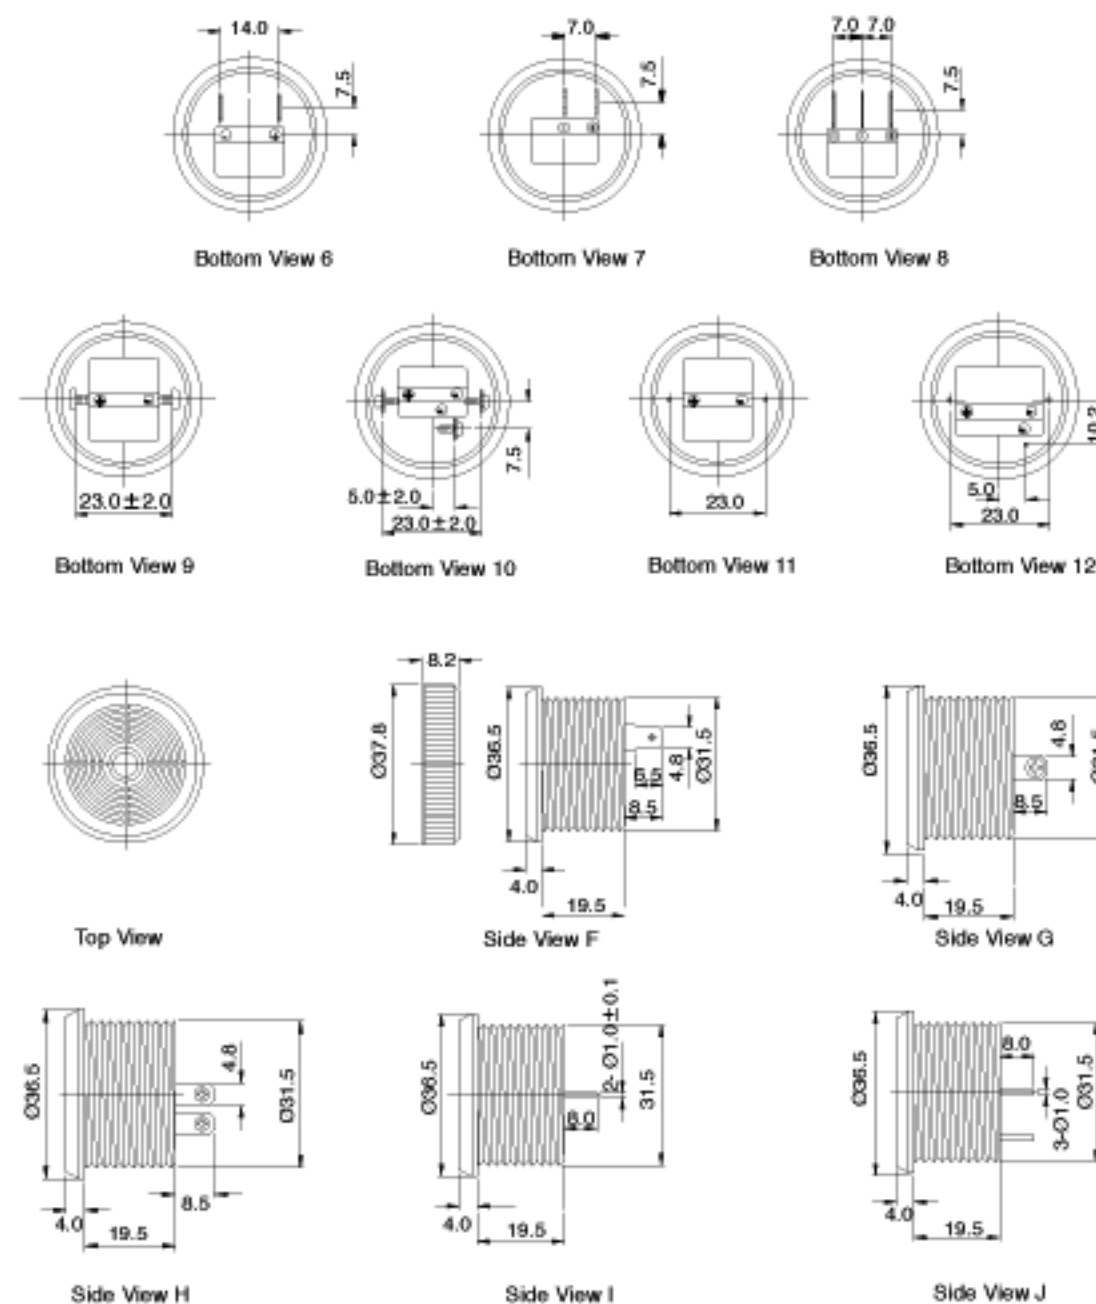

Tolerance: ±0.5mm Unit: mm