


5365 Series T-1 Right Angle 2 Wide LED Assembly

Description and Features

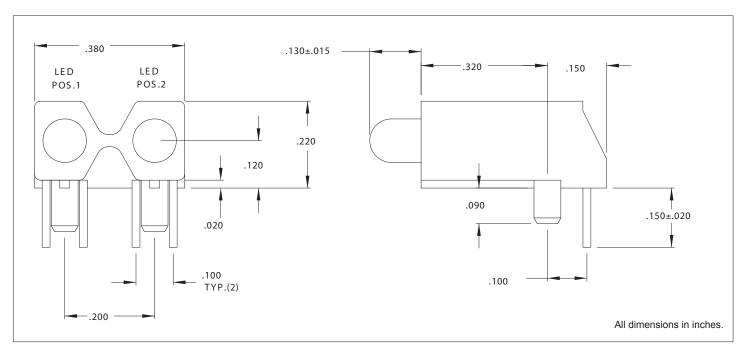

Features

- 2 T-1 LEDs mounted in single block.
- Height and spacing alignment saves assembly cost.

Housing: Black Nylon, UL94V-O

Note: Alternate LEDs are also available in this package as a standard variation.

Refer to "Mounting Hole Pattern 5.pdf"

Electro-Optical Characteristics and Ratings

Part Number	E mitted C olor	Typical Intensity (mcd)	Rated Current (mA)	Continuous Forward Current Max. (mA)	Forward Voltage		Reverse	Peak	Peak Forward
					Тур. (V)	Max. (V)	Breakdown Voltage Min. (V)	Wavelength (nm)	Current at 1MS-300 PPS (A)
5365F1;1	Red/Red	10	10	30	2.0	3.0	5	650	.1
5365F5;5	Green/Green	16	10	30	2.2	3.0	5	562	.09
5365F7;7	Yellow/Yellow	6.3	10	30	2.1	3.0	5	585	.1



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

VCC:

5365F7;7 5365F1;1 5365F5;5