


AMP WIRE RANGE		E13288 Listed
22-16 AWG SOLID OR STRANDED	22-16 AWG SOLID OR STRANDED	
LR7189 Certified	MILITARY P/N AND CLASS	
22-16 AWG SOLID OR STRANDED	NOT APPLICABLE	

STAMP 85 AMP 22-16* APPROX AS SHOWN
 22-16 TERMINALS ARE STAMPED 22-18 IN
 ACCORDANCE WITH MILITARY SPECIFICATION
 MIL-T-7928, COMMERCIAL WIRE RANGE IS 22-16
 85 INDICATES STUD SIZE

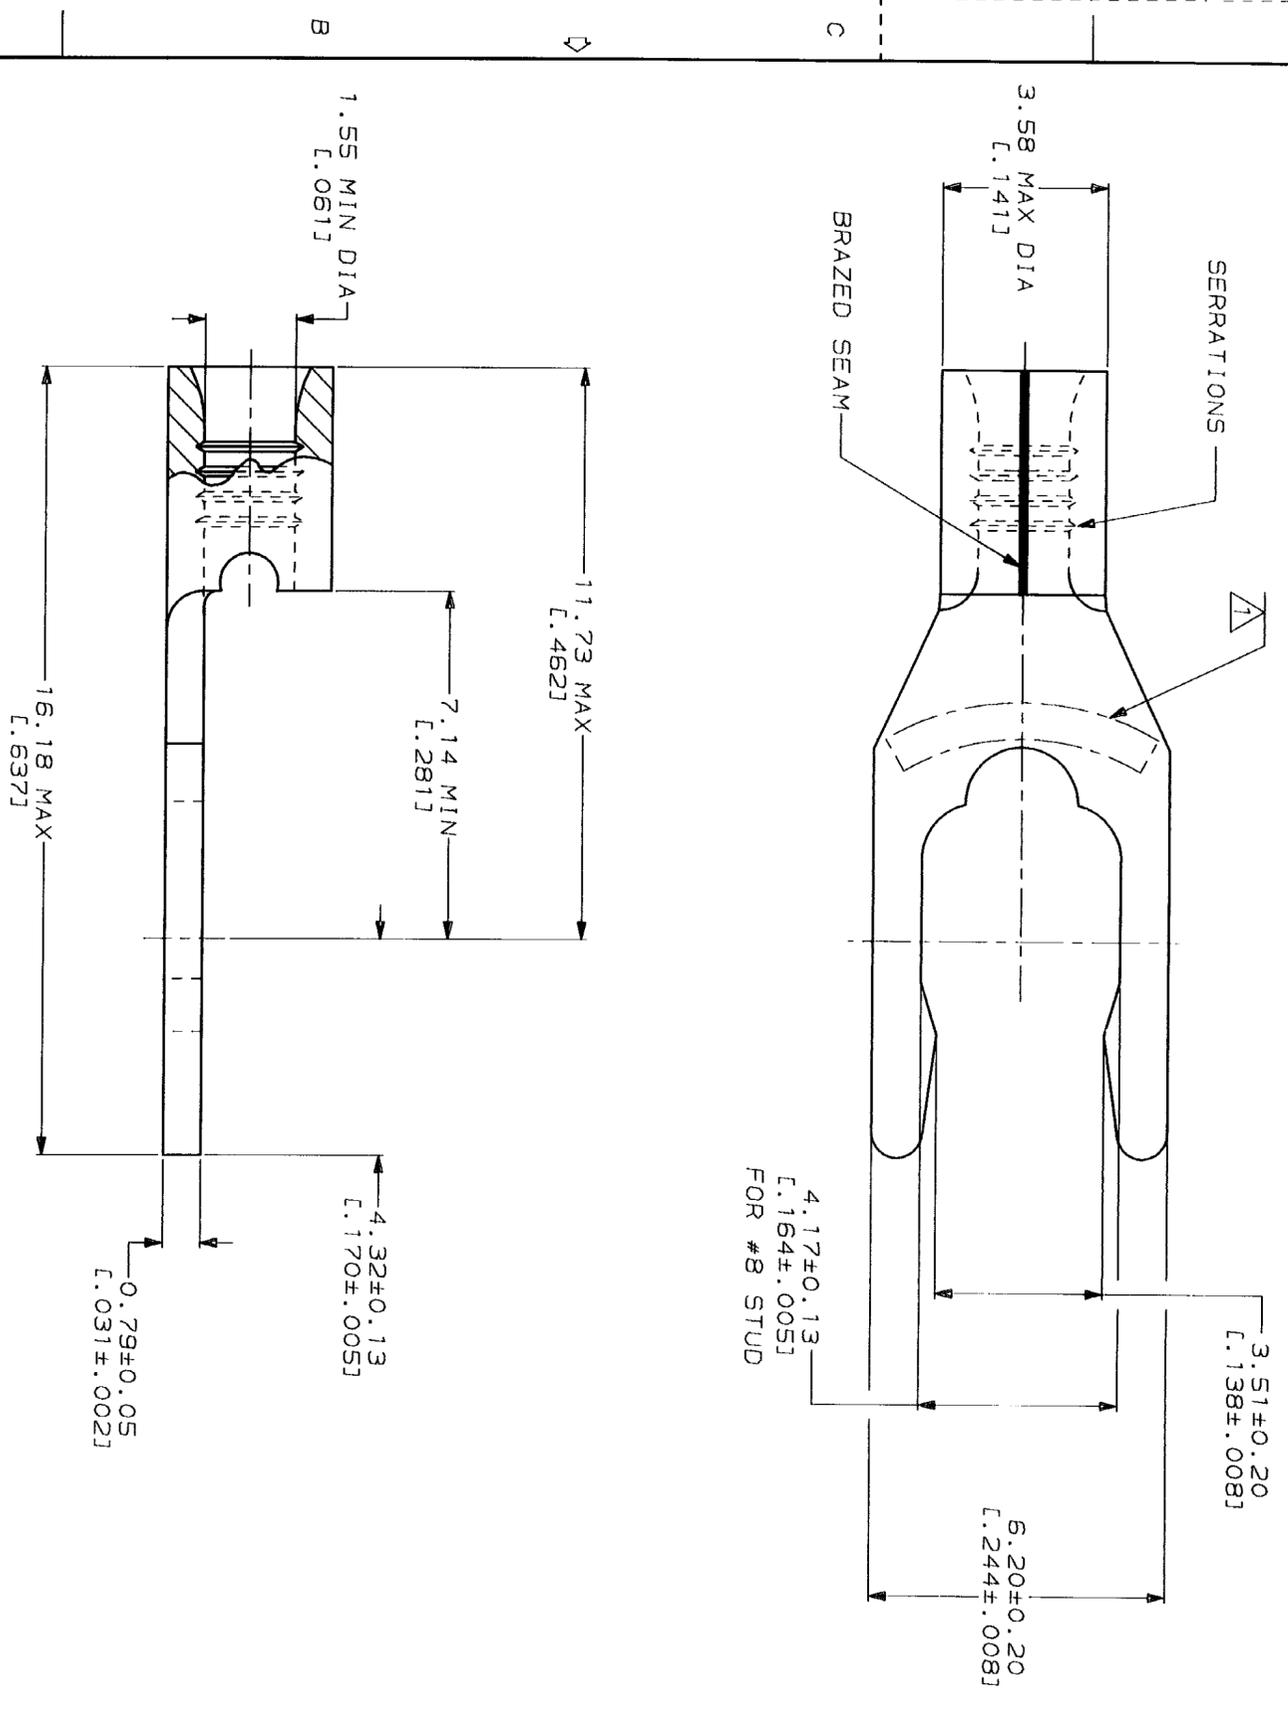

**AMP INCORPORATED
 CUSTOMER SERVICE SYSTEMS**

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111
FOR ORDER ENTRY	1-800-526-5142

MAX RECOMMENDED OPERATING TEMPERATURE:	170°C MAX
VOLTAGE RATING:	NOT APPLICABLE
WIRE CROSS SECTIONAL AREA RANGE:	0.26-1.65mm ² (509-3,2601 CIR MILS SOLID OR STRANDED)
FINISH	TIN PLATE 0.00254 [L.000100] MIN THK PER MIL-T-10727

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm - (INCHES) TOLERANCES ON:	DR 3-29-93 TA BRINKMAN
2 PLG DEC ±	CHK 3-29-93 DA PATTERSON
3 PLG DEC ±	APPD 3-29-93 DE MILLER
ANGLES	APPD 3-29-93 JL MECKLEY
MATERIAL	PRODUCT SPEC
PHOSPHOR BRONZE PER ASTM B-103 ANNEALED	APPLICATION SPEC
WEIGHT	

100	LOOSE PIECE, BOX	8-53831-1
5000	ON TAPE	53831-2
---	LOOSE PIECE	53831-1
QUANTITY	PACKAGING TYPE	PART NO

AMP
 AMP Incorporated
 Harrisburg, PA 17105-3608

TERMINAL, SHORT
 SPRING SPADE, SOLISTRAND™

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[53831-1](#)