

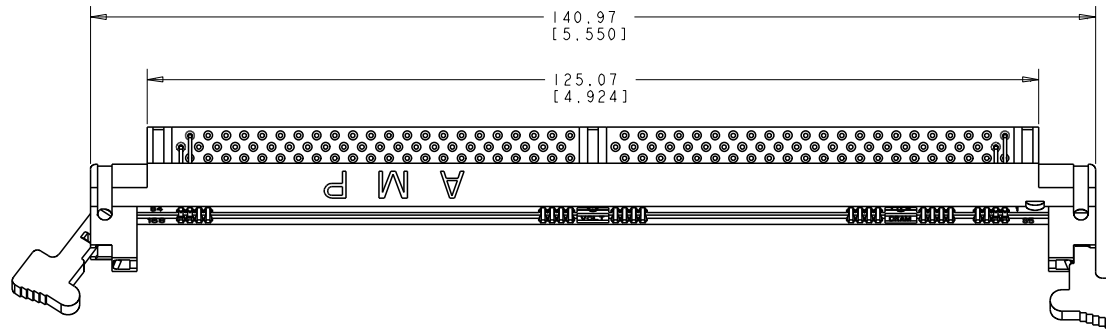
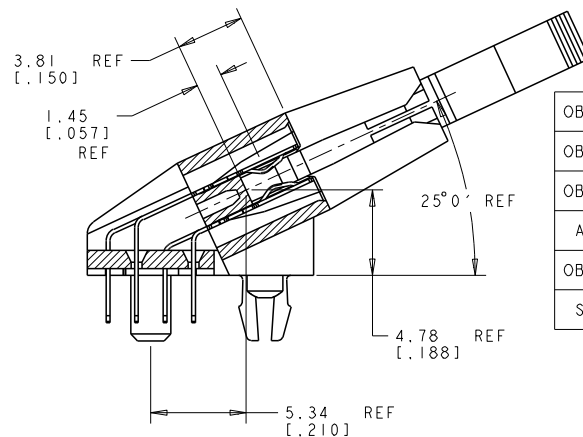


LOC	DIST	REVISIONS				
		P	LYR	DESCRIPTION	DATE	OWN
GP	00	A		RELEASED PER 0512-0488-04	30NOV04	MY
		D		REVISED PER ECR-10-005884	22MAR2010	FC

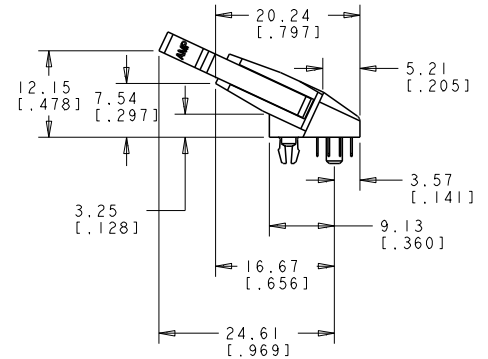

- NOTES:
- MATERIAL:
HOUSING AND EJECTOR:
HIGH TEMPERATURE NYLON
CONTACT:
PHOSPHOR BRONZE
 - FINISH:
CONTACT AREA:
0.00076[.000030] MIN THICK GOLD OVER
0.001270[.000050] MIN THICK NICKEL
SOLDERTAIL:
0.00381[.000150] MIN THICK MATTE TIN OVER
0.00064[.000025] MIN THICK NICKEL
 - MODULE BOARD PADS:
FOR OPTIMUM PERFORMANCE PADS SHOULD BE SMOOTH AND FLAT
PADS TO BE PLATED WITH:
0.00102[.000040] MIN THICK GOLD OVER
0.00127[.000050] MIN THICK NICKEL


- 4 WAVE SOLDER COMPATIBLE.
5 REFLOW COMPATIBLE.
6 PARTS ARE PACKAGED IN TUBES.

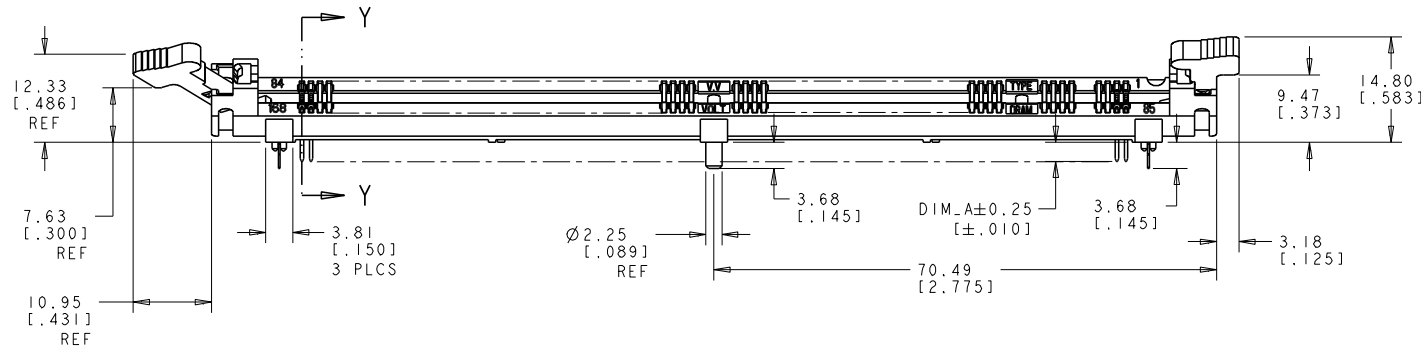


SECTION Y-Y
SCALE 5:1

OBSOLETE	4.50 [.177]	DETAIL C	DETAIL A	NON-BUFFERED DRAM, 3.3 VOLT	3-5390185-6 4
OBSOLETE	3.18 [.125]	DETAIL C	DETAIL A	NON-BUFFERED DRAM, 3.3 VOLT	2-5390185-6 6
OBSOLETE	3.18 [.125]	DETAIL C	DETAIL A	NON-BUFFERED DRAM, 3.3 VOLT	1-5390185-6 5
ACTIVE	3.18 [.125]	DETAIL C	DETAIL A	NON-BUFFERED DRAM, 3.3 VOLT	5390185-6 4
OBSOLETE	3.18 [.125]	DETAIL A	DETAIL A	STD DRAM, 3.3 VOLT	5390185-4
STATUS	SOLDERTAIL LENGTH DIM A	KEY #1	KEY #2	PART DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROL LAY THE DRAWING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION		OWN M. YEOMANS 30NOV04 CHK M. YEOMANS 30NOV04 APVD M. YEOMANS 30NOV04	Tyco Electronics Harrisburg, PA 17105-3608		
DIMENSIONS: mm[INCHES]		NAME		SOCKET ASSEMBLY, 168 POSITION, CENTER PLASTIC POST LOW PROFILE DIMM 2 P, LEAD-FREE	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC		SIZE CAGE CODE DRAWING NO	
0 PLC ± 1 PLC ± 2 PLC ±0.13(.005) 3 PLC ± 4 PLC ± ANGLES ± FINISH		APPLICATION SPEC		A200779C-5390185	
MATERIAL		WEIGHT		RESTRICTED TO	
		CUSTOMER DRAWING		SCALE 2:1 SHEET 1 OF 3 REV D	




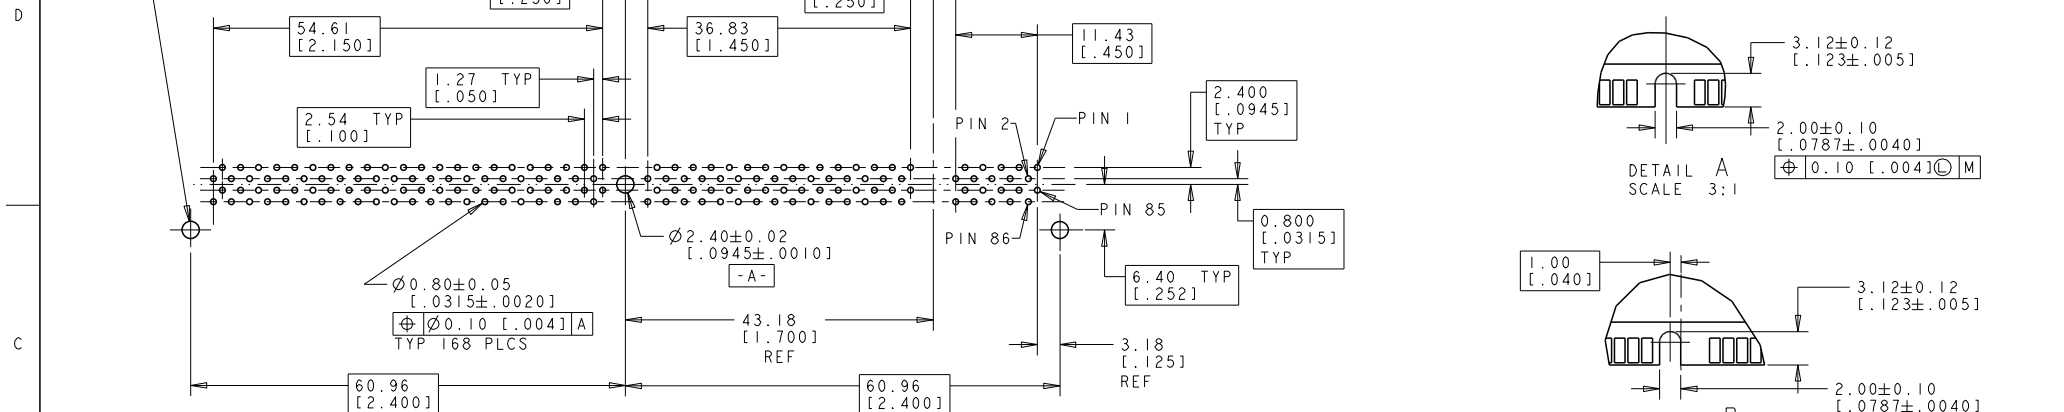


RECOMMENDED CIRCUIT BOARD HOLE LAYOUT

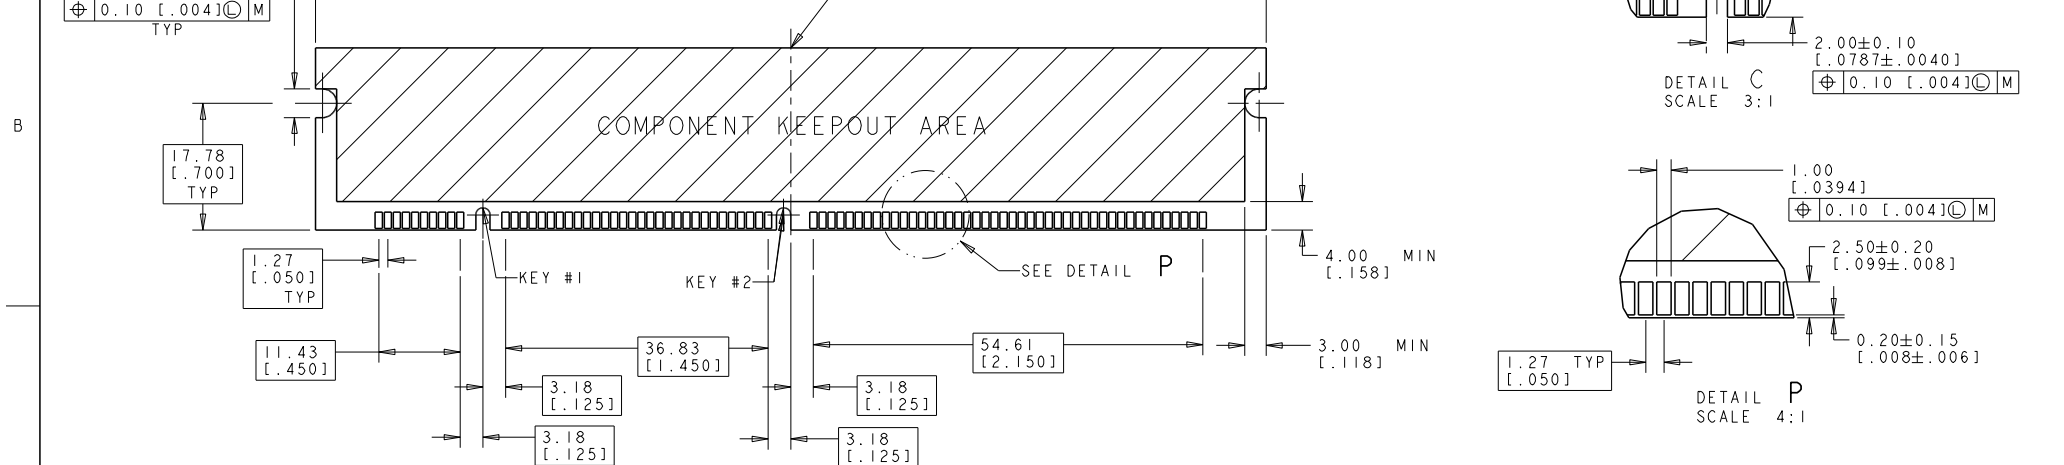



RECOMMENDED MODULE LAYOUT

SEE JEDEC SPEC. MO-161 FOR COMPLETE MODULE DETAILS
1.27±0.10[.050±.004] THICK ACROSS CONTACT PADS

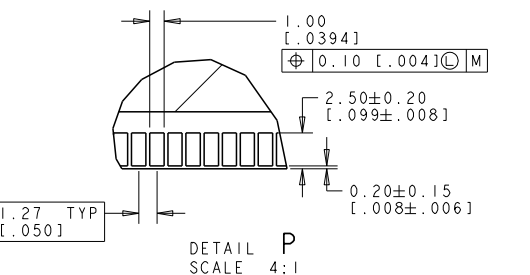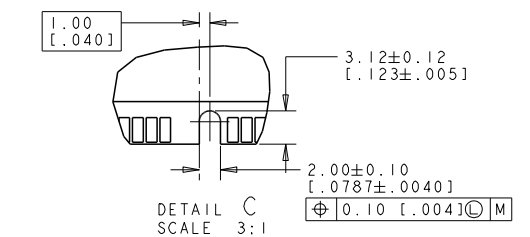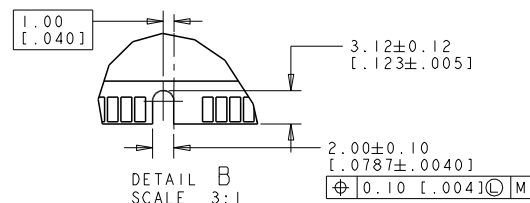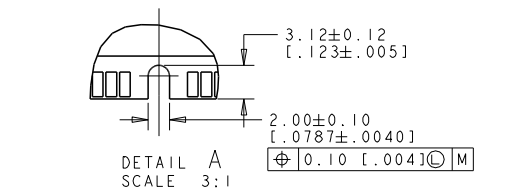


1015 DRAWING IS A CONTROL DRAWING FOR LITE ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE LATEST REVISION DRAWING SHOULD BE OBTAINED FOR THE LATEST INFORMATION.		DWN 30NOV04 CHK M YEOMANS 30NOV04 APVD M YEOMANS 30NOV04		tyco Electronics Tyco Electronics Harrisburg, PA 17105-3608	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		PRODUCT SPEC - APPLICATION SPEC -		SOCKET ASSEMBLY, 168 POSITION, CENTER PLASTIC POST LOW PROFILE DIMM 2 P. LEAD-FREE	
MATERIAL		FINISH		SIZE	
-		-		CAGE CODE DRAWING NO	
-		-		RESTRICTED TO	
-		-		A260779 C=5390185	
-		-		SCALE 2:1 SHEET 2 of 3 REV D	
-		-		CUSTOMER DRAWING	

LOC	DIST	REVISIONS				
GP	00	P	LTR	DESCRIPTION	DATE	OWN
		-		SEE SHEET 1		

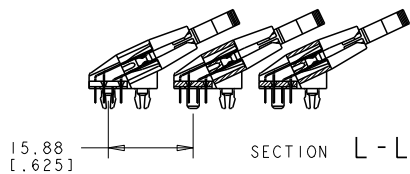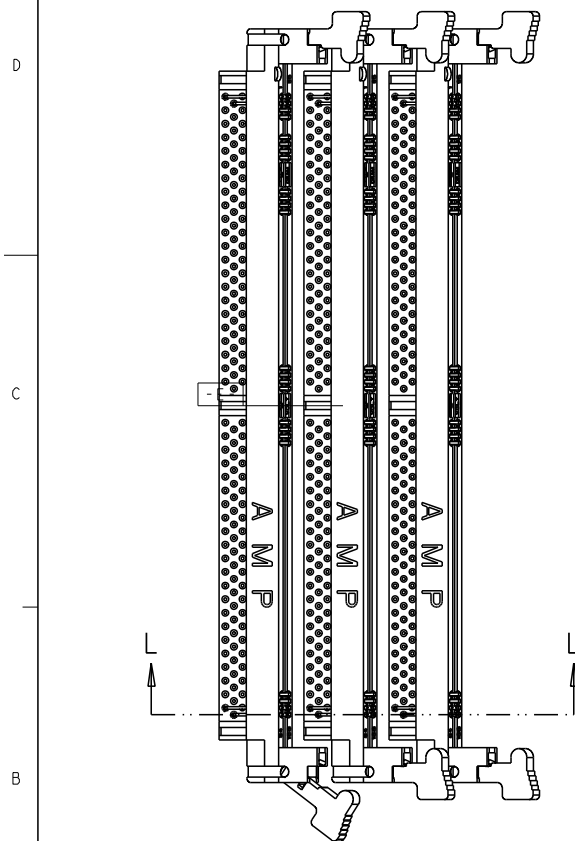


MINIMUM REPAIRABLE SOCKET TO SOCKET SPACING

WITH THE MODULES REMOVED, SOCKETS ON 15.88 [.625] OR GREATER SPACING CAN BE INDIVIDUALLY UNSOLDERED FROM THE BOARD AND REMOVED IF NECESSARY.

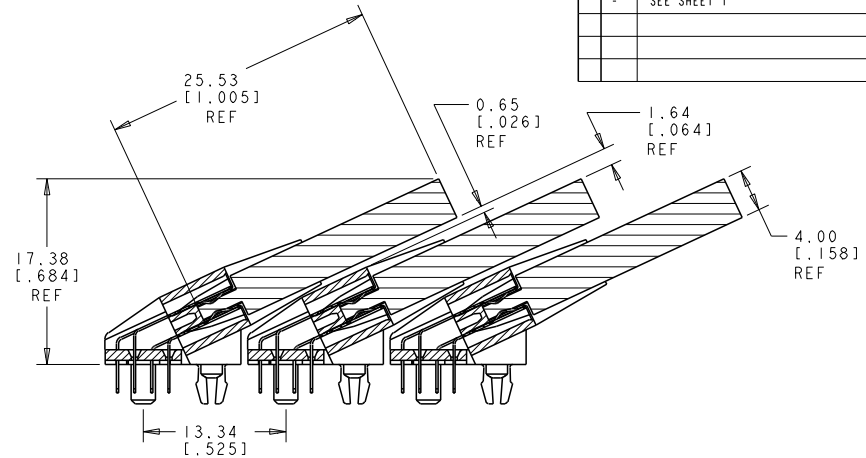

MINIMUM SOCKET TO SOCKET SPACING

WITH A 4.00 [.158] WIDE MODULE BOARD, A SOCKET TO SOCKET SPACING OF 13.34 [.525] WILL LEAVE APPROXIMATELY 0.65 [.026] OF CLEARANCE BETWEEN THE MODULE AND THE NEXT SOCKET BODY. THIS SPACING MAY OR MAY NOT BE SUITABLE DEPENDING ON YOUR MINIMUM GAP REQUIREMENTS.

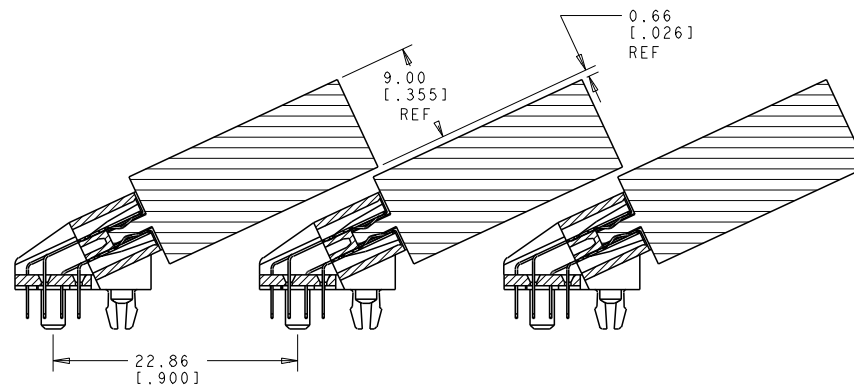

POSSIBLE SOCKET TO SOCKET SPACING FOR 9MM SOCKET

WITH A 9.00 [.355] WIDE MODULE BOARD, A SOCKET TO SOCKET SPACING OF 22.86 [.900] WILL LEAVE APPROXIMATELY 0.66 [.026] CLEARANCE BETWEEN THE ADJACENT MODULES. THIS SPACING MAY OR MAY NOT BE SUITABLE DEPENDING ON YOUR MINIMUM GAP REQUIREMENTS.

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROL MAY BE EXERCISED AT ANY TIME WITHOUT NOTICE SHOULD BE CONTACTED FOR THE LATEST REVISION		DWN M. YEOMANS 30NOV04 CHK M. YEOMANS 30NOV04 M. YEOMANS 30NOV04	Tyco Electronics Harrisburg, PA 17105-3608
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ±0.131 (0.005) 3 PLC ± 4 PLC ± ANGLES ± FINISH	NAME PRODUCT SPEC APPLICATION SPEC WEIGHT CUSTOMER DRAWING	SOCKET ASSEMBLY, 168 POSITION, CENTER PLASTIC POST LOW PROFILE DIMM 2 P, LEAD-FREE SIZE CAGE CODE DRAWING NO A200779C-5390185 RESTRICTED TO
SCALE 2:1 SHEET 3 OF 3 REV D		Tyco Electronics Harrisburg, PA 17105-3608	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5390185-6](#)