

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

AJ

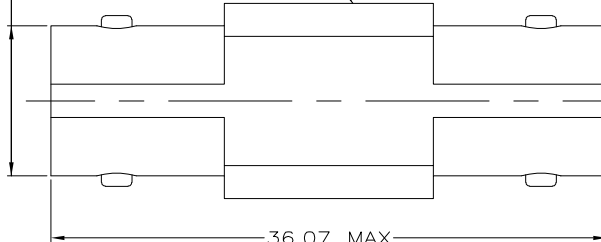
DIST
16

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	REVISED PER EC 0S14-0150-05	05OCT2005	REH	JL

- ① PHOSPHOR BRONZE PER QQ-B-750
② ZINC PER QQ-Z-363
③ POLYMETHYLPENTENE: GENERAL PURPOSE
④ NICKEL PLATE PER QQ-N-290,
3.81 μm [.000150] MIN THICKNESS
⑤ GOLD PLATE PER ASTM-B-488,
0.38 μm [.000015] MIN THICKNESS

SHELL

 $\phi 9.66$
[.380]36.07 MAX
[1.420]

③ DIELECTRIC

①/⑤ CONTACT

5414414-1

PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

OWN
G. ATTADIA - DOCK5CHK
J. HAVENERAPVD
J. LIPPERT

19APR2005

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

tyco
ElectronicsTyco Electronics Corporation
Harrisburg, PA 17105-3608

NAME

JACK-TO-JACK ADAPTER ASSEMBLY,
COMMERCIAL BNC

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A.3

00779

C=5414414

—

SCALE

4:1

SHEET

1 of 1

REV

A

AMP 1470-19 REV 31MAR2000