

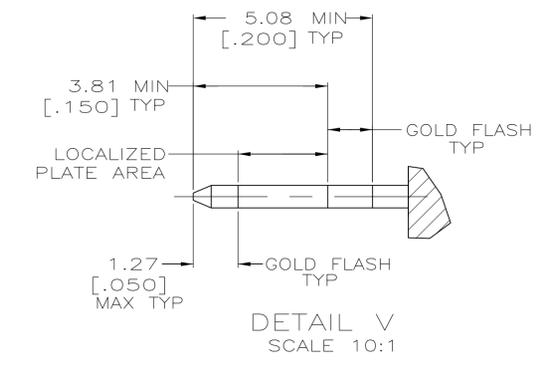
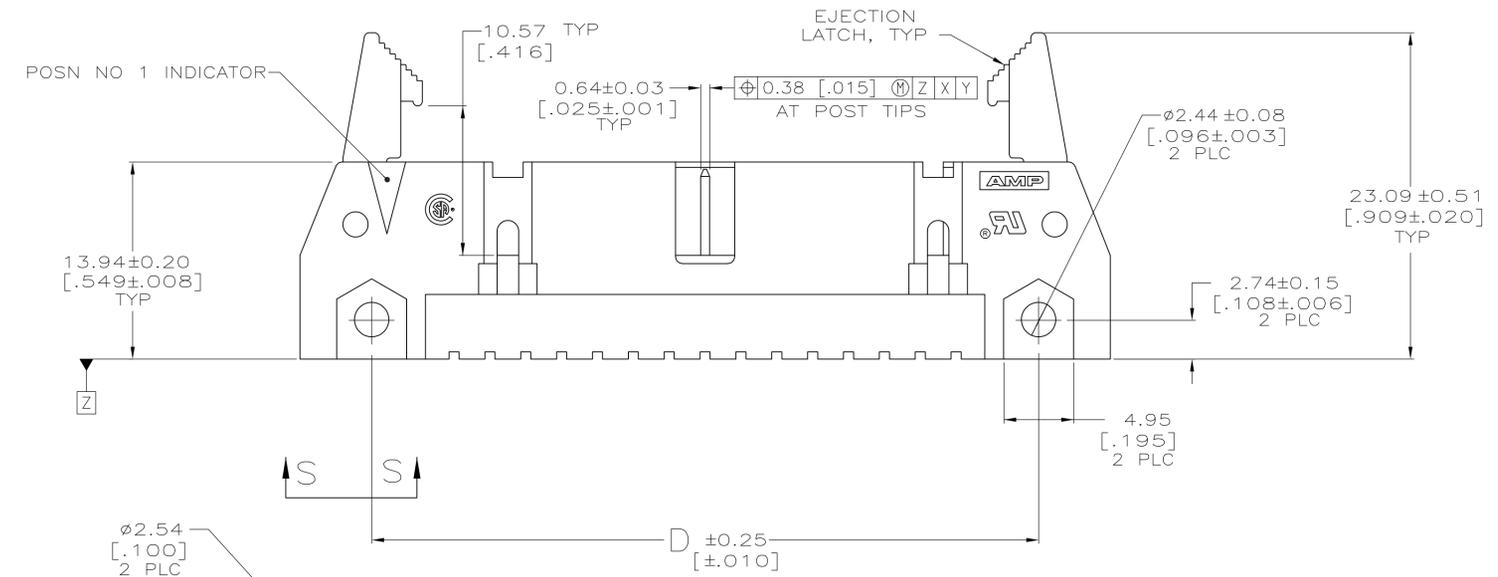
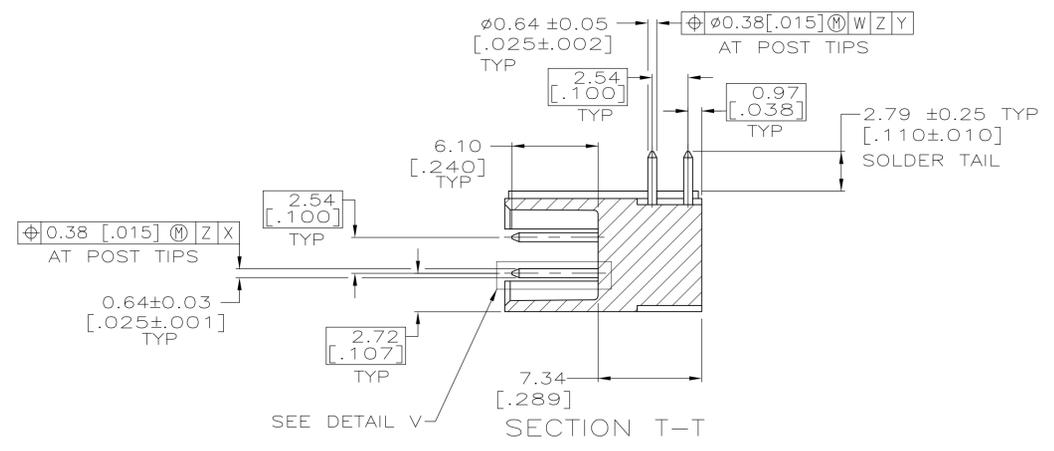


EJECTION LATCHES OMITTED IN THIS VIEW FOR CLARITY

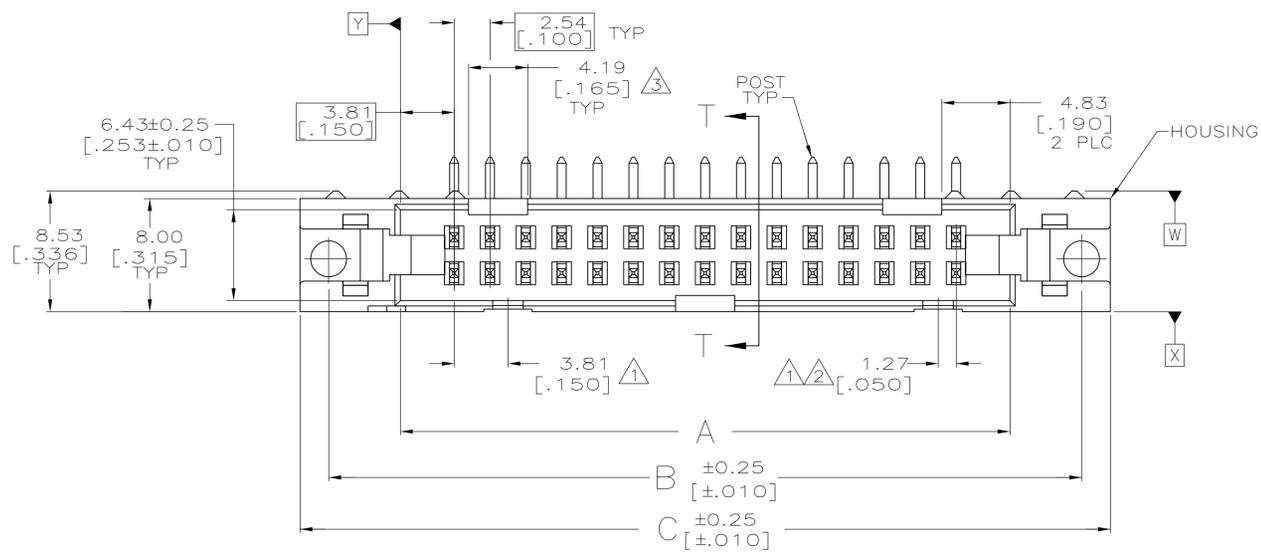

SEE SHEET 2 FOR TABLE & NOTES

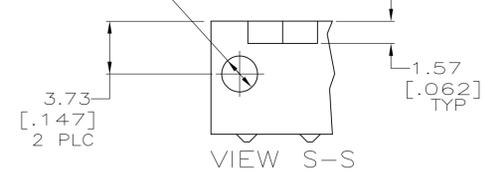

|   |              |                               |                     |              |
|---|--------------|-------------------------------|---------------------|--------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009. |              | DIN L VARELA - DOCKS 01-07-05 | STE TE Connectivity |              |
| DIMENSIONS: mm (INCHES)   |              | CHK S BOLASH 01-07-05         | NAME                |              |
| TOLERANCES UNLESS OTHERWISE SPECIFIED:  |              | APP'D M WALMSLEY 01-07-05     | PRODUCT SPEC        |              |
| 0 PLC $\pm$   | 1 PLC $\pm$  | 108-40018                     |                     |              |
| 2 PLC $\pm 0.13$ [.005]   | 3 PLC $\pm$  | APPLICATION SPEC              |                     |              |
| 4 PLC $\pm$   | ANGLES $\pm$ | SIZE                          | CAGE CODE           | DRAWING NO   |
| MATERIAL  | FINISH       | WEIGHT                        | A1 00779            | 5499345      |
| CUSTOMER DRAWING  |              | SCALE                         | 4:1                 | SHEET 1 OF 2 |
|   |              | REV                           | G                   |              |

- ① COORDINATE DIMENSION APPLIES FROM BASIC LOCATION.
- ② 10 AND 14 POSITION SIZES CONTAIN ONLY ONE SLOT FOR SNAP-IN POLARIZER (MILITARY POLARIZATION) LOCATED AS SHOWN.
- ③ 10 POSITION SIZES CONTAIN ONLY ONE SLOT FOR DUAL POLARIZATION, LOCATED AS SHOWN.
- 4. RECOMMENDED PRINTED CIRCUIT BOARD THICKNESS IS 1.57 [.062].
- ⑤ DISTANCE REQUIRED BY EJECTION LATCHES IN THE OPEN POSITION.
- ⑥ HOUSING & LATCHES: GLASS FILLED NYLON OR POLYESTER, UL94V-0 RATED, SEE TABLE FOR COLOR. POSTS: BRASS.
- ⑦ POSTS: GOLD FLASH OVER PALLADIUM-NICKEL PLATE, 0.76μm[.000030] MIN TOTAL ON THE LOCALIZED PLATE AREA, 2.54μm[.000100] MIN TIN PLATE ON THE SOLDER-TAIL, 1.27μm[.000050] MIN NICKEL UNDERPLATE ON THE ENTIRE POST.  
 -OR-  
 0.76μm[.000030] MIN GOLD PLATE ON THE LOCALIZED PLATE AREA, 2.54μm[.000100] MIN TIN PLATE ON THE SOLDER-TAIL, 1.27μm[.000050] MIN NICKEL UNDERPLATE ON THE ENTIRE POST.
- ⑧ DATUMS M & N TO BE ESTABLISHED BY CUSTOMER.

|          |                  |                  |                  |                   |                  |                  |                       |            |             |
|----------|------------------|------------------|------------------|-------------------|------------------|------------------|-----------------------|------------|-------------|
| OBSOLETE | 53.34<br>[2.100] | 65.02<br>[2.560] | 65.02<br>[2.560] | 75.18<br>[2.960]  | 71.12<br>[2.800] | 60.96<br>[2.400] | BLUE                  | 44         | 3-5499345-3 |
|          | 78.74<br>[3.100] | 90.42<br>[3.560] | 90.42<br>[3.560] | 100.58<br>[3.960] | 96.52<br>[3.800] | 86.36<br>[3.400] | BLUE                  | 64         | 3-5499345-2 |
|          | 73.66<br>[2.900] | 85.34<br>[3.360] | 85.34<br>[3.360] | 95.50<br>[3.760]  | 91.44<br>[3.600] | 81.28<br>[3.200] | BLUE                  | 60         | 3-5499345-1 |
|          | 60.96<br>[2.400] | 72.64<br>[2.860] | 72.64<br>[2.860] | 82.80<br>[3.260]  | 78.74<br>[3.100] | 68.58<br>[2.700] | BLUE                  | 50         | 3-5499345-0 |
| OBSOLETE | 48.26<br>[1.900] | 59.94<br>[2.360] | 59.94<br>[2.360] | 70.10<br>[2.760]  | 66.04<br>[2.600] | 55.88<br>[2.200] | BLUE                  | 40         | 2-5499345-9 |
| OBSOLETE | 40.64<br>[1.600] | 52.32<br>[2.060] | 52.32<br>[2.060] | 62.48<br>[2.460]  | 58.42<br>[2.300] | 48.26<br>[1.900] | BLUE                  | 34         | 2-5499345-8 |
|          | 30.48<br>[1.200] | 42.16<br>[1.660] | 42.16<br>[1.660] | 52.32<br>[2.060]  | 48.26<br>[1.900] | 38.10<br>[1.500] | BLUE                  | 26         | 2-5499345-6 |
|          | 22.86<br>[.900]  | 34.54<br>[1.360] | 34.54<br>[1.360] | 44.70<br>[1.760]  | 40.64<br>[1.600] | 30.48<br>[1.200] | BLUE                  | 20         | 2-5499345-4 |
|          | 17.78<br>[.700]  | 29.46<br>[1.160] | 29.46<br>[1.160] | 39.62<br>[1.560]  | 35.56<br>[1.400] | 25.40<br>[1.000] | BLUE                  | 16         | 2-5499345-3 |
| OBSOLETE | 15.24<br>[.600]  | 26.92<br>[1.060] | 26.92<br>[1.060] | 37.08<br>[1.460]  | 33.02<br>[1.300] | 22.86<br>[.900]  | BLUE                  | 14         | 2-5499345-2 |
| OBSOLETE | 10.16<br>[.400]  | 21.84<br>[.860]  | 21.84<br>[.860]  | 32.00<br>[1.260]  | 27.94<br>[1.100] | 17.78<br>[.700]  | BLUE                  | 10         | 2-5499345-1 |
|          | 78.74<br>[3.100] | 90.42<br>[3.560] | 90.42<br>[3.560] | 100.58<br>[3.960] | 96.52<br>[3.800] | 86.36<br>[3.400] | BLACK                 | 64         | 1-5499345-2 |
|          | 73.66<br>[2.900] | 85.34<br>[3.360] | 85.34<br>[3.360] | 95.50<br>[3.760]  | 91.44<br>[3.600] | 81.28<br>[3.200] | BLACK                 | 60         | 1-5499345-1 |
|          | 60.96<br>[2.400] | 72.64<br>[2.860] | 72.64<br>[2.860] | 82.80<br>[3.260]  | 78.74<br>[3.100] | 68.58<br>[2.700] | BLACK                 | 50         | 1-5499345-0 |
|          | 48.26<br>[1.900] | 59.94<br>[2.360] | 59.94<br>[2.360] | 70.10<br>[2.760]  | 66.04<br>[2.600] | 55.88<br>[2.200] | BLACK                 | 40         | 5499345-9   |
|          | 40.64<br>[1.600] | 52.32<br>[2.060] | 52.32<br>[2.060] | 62.48<br>[2.460]  | 58.42<br>[2.300] | 48.26<br>[1.900] | BLACK                 | 34         | 5499345-8   |
|          | 30.48<br>[1.200] | 42.16<br>[1.660] | 42.16<br>[1.660] | 52.32<br>[2.060]  | 48.26<br>[1.900] | 38.10<br>[1.500] | BLACK                 | 26         | 5499345-6   |
|          | 27.94<br>[1.100] | 39.62<br>[1.560] | 39.62<br>[1.560] | 49.78<br>[1.960]  | 45.72<br>[1.800] | 35.56<br>[1.400] | BLACK                 | 24         | 5499345-5   |
|          | 22.86<br>[.900]  | 34.54<br>[1.360] | 34.54<br>[1.360] | 44.70<br>[1.760]  | 40.64<br>[1.600] | 30.48<br>[1.200] | BLACK                 | 20         | 5499345-4   |
|          | 17.78<br>[.700]  | 29.46<br>[1.160] | 29.46<br>[1.160] | 39.62<br>[1.560]  | 35.56<br>[1.400] | 25.40<br>[1.000] | BLACK                 | 16         | 5499345-3   |
|          | 15.24<br>[.600]  | 26.92<br>[1.060] | 26.92<br>[1.060] | 37.08<br>[1.460]  | 33.02<br>[1.300] | 22.86<br>[.900]  | BLACK                 | 14         | 5499345-2   |
|          | 10.16<br>[.400]  | 21.84<br>[.860]  | 21.84<br>[.860]  | 32.00<br>[1.260]  | 27.94<br>[1.100] | 17.78<br>[.700]  | BLACK                 | 10         | 5499345-1   |
|          | F                | E                | D                | C                 | B                | A                | HOUSING & LATCH COLOR | NO OF POSN | PART NUMBER |

|  |  |  |  |                   |  |                          |  |         |  |                 |  |
|--|--|--|--|-------------------|--|--------------------------|--|---------|--|-----------------|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009 |  | DIN L VARELA - DOCKS 01-07-05          |  | S BOLASH 01-07-05 |  | APVD M WALMSLEY 01-07-05 |  | NAME    |  | TE Connectivity |  |
| DIMENSIONS: mm [INCHES]  |  | TOLERANCES UNLESS OTHERWISE SPECIFIED: |  | PRODUCT SPEC      |  | APPLICATION SPEC         |  | SIZE    |  | RESTRICTED TO   |  |
| 0 PLC ± -  |  | 1 PLC ± -                              |  | 108-40018         |  | -                        |  | A1      |  | -               |  |
| 2 PLC ± 0.13[.005]   |  | 3 PLC ± -                              |  | -                 |  | -                        |  | 00779   |  | -               |  |
| 4 PLC ± -  |  | ANGLES ± -                             |  | -                 |  | -                        |  | 5499345 |  | -               |  |
| MATERIAL   |  | FINISH                                 |  | WEIGHT            |  | SCALE                    |  | SHEET   |  | REV             |  |
| ⑥  |  | ⑦                                      |  | -                 |  | 1:1                      |  | 2 OF 2  |  | G               |  |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5499345-2](#)