
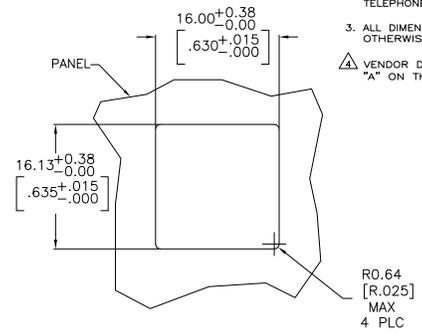
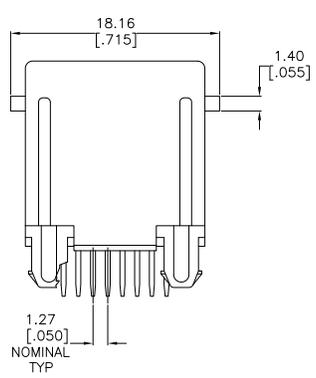
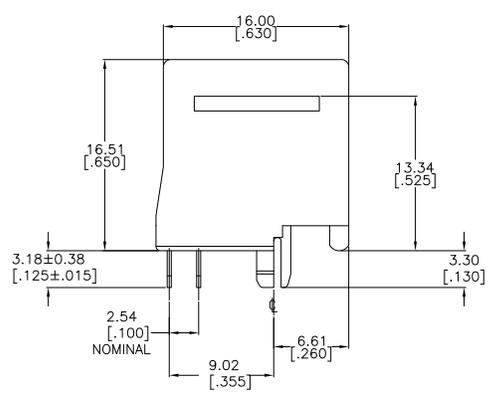


THIS DRAWING IS UNCLASSIFIED
 UNLESS INDICATED OTHERWISE
 © 2008 BY TYS ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.


REV	DATE	DESCRIPTION	BY	CHK	APP
AA	00				
B	02-07-2008				

- MATERIAL: HOUSING- PBT POLYESTER, BLACK. TERMINAL- 0.35 [.0138] THICK PHOS BRONZE PLATED WITH 1.27µm [.000050] THICK HARD GOLD IN LOCALIZED GOLD PLATE AREA AND 2.03µm [.000080] THICK MATTE TIN IN SOLDER AREA OVER 1.27µm [.000050] THICK NICKEL UNDERPLATE.


- CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68 AND REA BULLETIN 345-81, FE-76 SPECIFICATION FOR MODULAR TELEPHONE HARDWARE.
- ALL DIMENSIONS SHOWN ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- VENDOR DESIGNATION SHALL BE THE LETTER "A" ON THIS SURFACE.

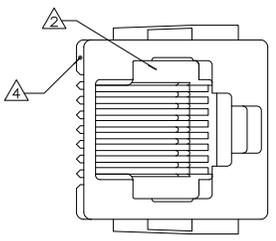

RECOMMENDED PANEL CUTOUT SCALE 4:1

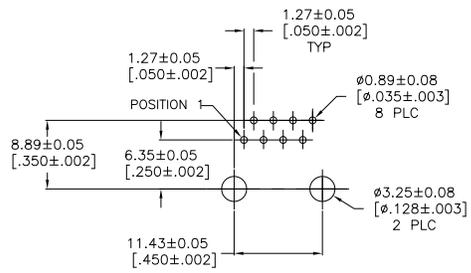

RECOMMENDED PRINTED CIRCUIT BOARD LAYOUT COMPONENT SIDE SCALE 4:1

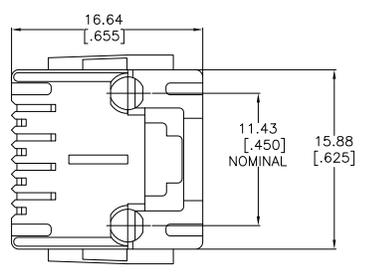

5520259-4
 PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		REV	DATE	DESCRIPTION	BY	CHK	APP
INCHES	MILLIMETERS						
1/16	1.5875						
1/8	3.175						
1/4	6.35						
3/8	9.525						
1/2	12.7						
3/4	19.05						
1	25.4						
1 1/4	31.75						
1 1/2	38.1						
1 3/4	44.45						
2	50.8						
2 1/4	57.15						
2 1/2	63.5						
2 3/4	69.85						
3	76.2						
3 1/4	82.55						
3 1/2	88.9						
3 3/4	95.25						
4	101.6						
4 1/4	107.95						
4 1/2	114.3						
4 3/4	120.65						
5	127						
5 1/4	133.35						
5 1/2	139.7						
5 3/4	146.05						
6	152.4						
6 1/4	158.75						
6 1/2	165.1						
6 3/4	171.45						
7	177.8						
7 1/4	184.15						
7 1/2	190.5						
7 3/4	196.85						
8	203.2						
8 1/4	209.55						
8 1/2	215.9						
8 3/4	222.25						
9	228.6						
9 1/4	234.95						
9 1/2	241.3						
9 3/4	247.65						
10	254						
10 1/4	260.35						
10 1/2	266.7						
10 3/4	273.05						
11	279.4						
11 1/4	285.75						
11 1/2	292.1						
11 3/4	298.45						
12	304.8						
12 1/4	311.15						
12 1/2	317.5						
12 3/4	323.85						
13	330.2						
13 1/4	336.55						
13 1/2	342.9						
13 3/4	349.25						
14	355.6						
14 1/4	361.95						
14 1/2	368.3						
14 3/4	374.65						
15	381						
15 1/4	387.35						
15 1/2	393.7						
15 3/4	400.05						
16	406.4						
16 1/4	412.75						
16 1/2	419.1						
16 3/4	425.45						
17	431.8						
17 1/4	438.15						
17 1/2	444.5						
17 3/4	450.85						
18	457.2						
18 1/4	463.55						
18 1/2	469.9						
18 3/4	476.25						
19	482.6						
19 1/4	488.95						
19 1/2	495.3						
19 3/4	501.65						
20	508						
20 1/4	514.35						
20 1/2	520.7						
20 3/4	527.05						
21	533.4						
21 1/4	539.75						
21 1/2	546.1						
21 3/4	552.45						
22	558.8						
22 1/4	565.15						
22 1/2	571.5						
22 3/4	577.85						
23	584.2						
23 1/4	590.55						
23 1/2	596.9						
23 3/4	603.25						
24	609.6						
24 1/4	615.95						
24 1/2	622.3						
24 3/4	628.65						
25	635						