


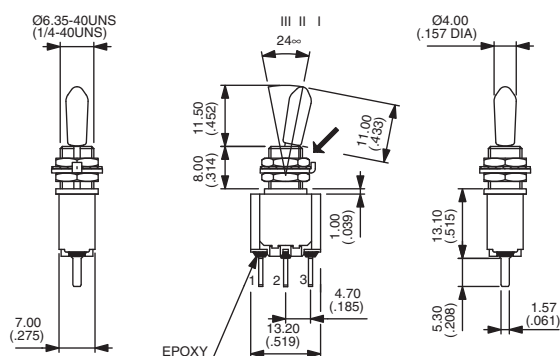



• • •

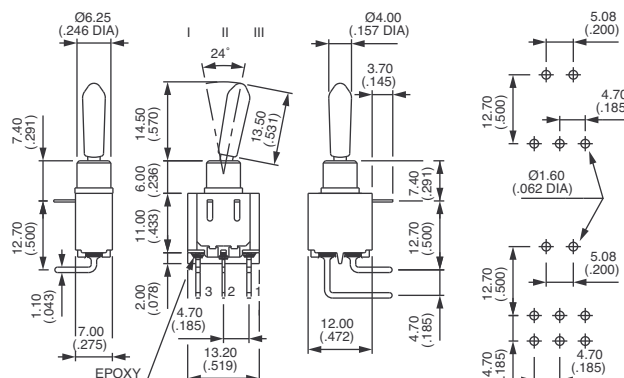


* In double pole W models, spacing between poles on PCB is different from standard : 4,7 mm (.185) instead of 3,81 mm (.150)



For threaded bushing models
Cap U270 compulsory



For plain bushing models
Cap U1040 compulsory




For use with paddles only




55000 series

VDE approved toggle switches

LEVERS (continued)

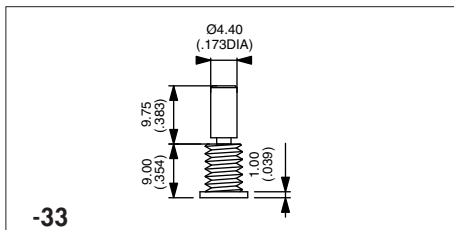


-33
For threaded bushing models

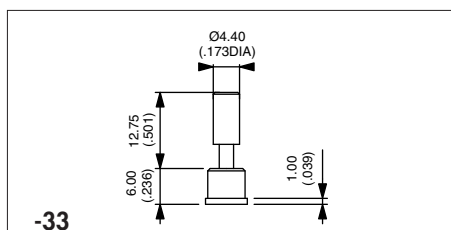

-33
For plain bushing models


AGENCY APPROVALS



VDE
VDEUL
VDEULCSA


Complete above box with desired approvals.

INSULATING CAPS AND PADDLES




Insulating caps

Compulsory - delivered assembled on the lever - not available in ivory colour

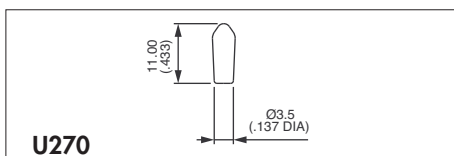


U270
For threaded bushing models

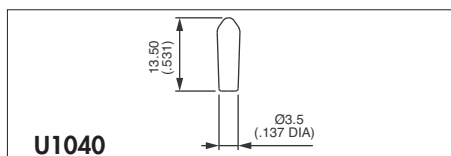


U1040
For plain bushing models

Paddles


For use with lever 4N only. Shown with threaded bushing. Order separately.

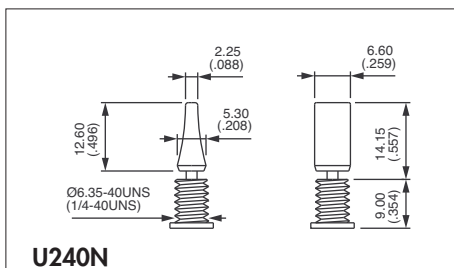

U240N

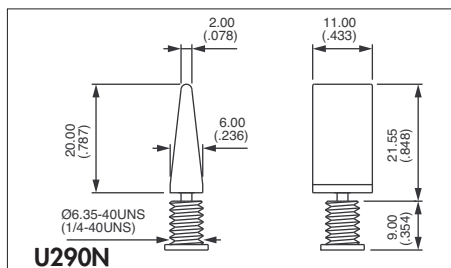

U290N

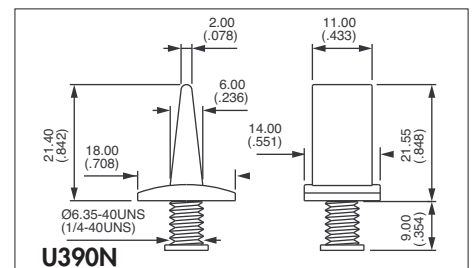

U390N

Cap/paddle colours


Replace last "0" by number

- | | |
|-----|-----------|
| 1 | blue |
| 1/4 | dark blue |
| 2 | black |
| 3 | green |
| 4 | grey |
| 5 | yellow |
| 7 | ivory |
| 7/1 | white |
| 9 | orange |



GROUND CONNECTOR

IMPORTANT : compulsory on models with threaded bushing if the panel is not metallic or not connected to ground. Order separately.

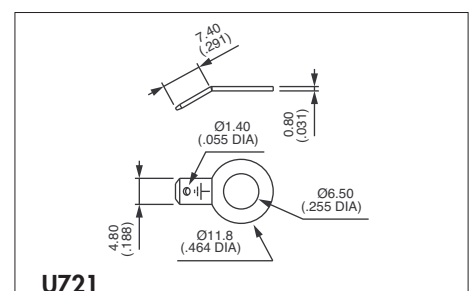

U721