

CABLE, ELECTRIC, RADIATION-CROSSLINKED, EXTRUDED, MODIFIED, FLUOROPOLYMER-INSULATED, ONE CONDUCTOR, SHIELDED, JACKETED, LIGHTWEIGHT

25APR11
Revision A1


150°C

The complete requirements for procuring the cable described herein shall consist of this document and the issue in effect of Raychem Specification 55A.

COMPONENT WIRE - 55A0111

SHIELD - TIN-COATED COPPER

JACKET - RADIATION-CROSSLINKED, MODIFIED ETFE

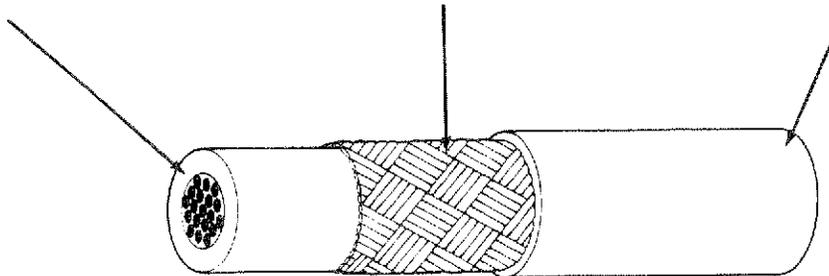

| PART NUMBER | CONDUCTOR SIZE (AWG) | SHIELD SIZE (AWG) | JACKET THICKNESS (in.) | | OUTSIDE DIAMETER (in.) | | MAXIMUM WEIGHT (lb/1000 ft) |
|--------------|----------------------|-------------------|------------------------|---------|------------------------|---------|-----------------------------|
| | | | MINIMUM | NOMINAL | NOMINAL | MAXIMUM | |
| | | | 55A1111-30-* | 30 | 38 | .006 | |
| 55A1111-28-* | 28 | 38 | .006 | .008 | .060 | .065 | 3.9 |
| 55A1111-26-* | 26 | 38 | .006 | .008 | .065 | .070 | 4.6 |
| 55A1111-24-* | 24 | 38 | .006 | .008 | .070 | .075 | 5.5 |
| 55A1111-22-* | 22 | 38 | .006 | .008 | .076 | .081 | 6.9 |
| 55A1111-20-* | 20 | 38 | .006 | .008 | .084 | .089 | 9.0 |
| 55A1111-18-* | 18 | 38 | .006 | .008 | .094 | .099 | 12.0 |
| 55A1111-16-* | 16 | 38 | .006 | .008 | .102 | .108 | 14.6 |
| 55A1111-14-* | 14 | 38 | .006 | .008 | .119 | .125 | 20.4 |
| 55A1111-12-* | 12 | 38 | .006 | .008 | .137 | .143 | 28.5 |
| 55A1111-10-* | 10 | 38 | .006 | .008 | .161 | .169 | 42.1 |
| 55A1111-8-* | 8 | 38 | .007 | .009 | .223 | .234 | 74.2 |

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C
 Maximum continuous conductor temperature
 VOLTAGE RATING: 600 volts (rms)
 ACCELERATED AGING: 300 ± 3°C for 7 hours
 BLOCKING: 200 ± 3°C for 6 hours
 DIELECTRIC WITHSTAND: 1500 volts, 60 Hz
 FLAMMABILITY:
 Procedure 1, 3 seconds (maximum); 3 in. (maximum);
 no flaming of facial tissue
 JACKET COLOR: White preferred
 JACKET ELONGATION AND TENSILE STRENGTH:
 Elongation, 50% (minimum)
 Tensile Strength, 5000 psi (minimum)
 JACKET FLAWS:
 Spark Test, 1000 volts, 60 Hz (rms), 100% test
 Impulse Dielectric Test, 6.0 kV (peak), 100% test
 LIFE CYCLE: 200 ± 3°C for 168 hours

LOW TEMPERATURE-COLD BEND: -65 ± 2°C for 4 hours
 SHIELD COVERAGE: 85% (minimum)
 THERMAL SHOCK: 300 ± 3°C for 6 hours
 VOLTAGE WITHSTAND TEST: (After Accelerated Aging, Immersion, Life Cycle, Low Temperature-Cold Bend, and Thermal Shock) 1000 volts, 60 Hz, 1 minute

PART NUMBER:
 The "*" in the part numbers above shall be replaced by color code designators in accordance with MIL-STD-681 with a dash separating the component wire color from the jacket color.
 Example:
 AWG 20, white component wire, white jacket:
 55A1111-20-9-9.

NOTE: Nominal values are for information only.
 Nominal values are not requirements.

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
 REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

TE TE Connectivity
 Tyco Electronics Corporation
 Raychem Wire and Cable
 300 Constitution Drive, Menlo Park, California 94025-1165
 415 361 3333 TWX 910 373 1728

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype [ameyasales1](#) [ameyasales2](#)

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com