


SPECIFICATION CONTROL DRAWING

55PC0222TITLE
TWO CONDUCTOR CABLE, UNSHIELDED, UNJACKETED, 600 VOLTDate
12-6-96Revision
B

This specification sheet forms a part of the latest issue of Raychem Specification 55PC.

COMPONENT WIRES - 55PC0212

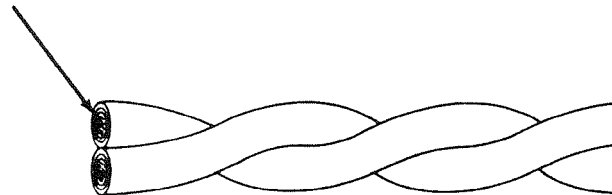

CONSTRUCTION DETAILS						
PART NUMBER	CONDUCTOR SIZE (AWG)	DIAMETER (in.)			WEIGHT (lbs/1000 ft.)	
		LOWER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT
55PC0222-24-*	24	.076	.079	.082	4.00	4.23
55PC0222-22-*	22	.088	.091	.094	5.87	6.12
55PC0222-20-*	20	.105	.108	.111	8.87	9.17
55PC0222-18-*	18	.124	.127	.130	13.33	13.82
55PC0222-16-*	16	.139	.142	.145	16.94	17.46
55PC0222-14-*	14	.168	.172	.176	26.07	26.78
55PC0222-12-*	12	.205	.209	.214	39.93	40.85
55PC0222-10-*	10	.252	.258	.264	62.99	64.65

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 200°C
Maximum continuous conductor temperature
VOLTAGE RATING: 600 volts (rms)
INSULATION FLAWS:
Impulse Dielectric Test, 8.0 kV (peak)

PART NUMBER:
The "*" in the part numbers above shall be replaced by a color code designator with a slash separating the component wire colors.
Example: AWG 22, red and blue component wires;
55PC0222-22-2/6

COLOR AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-881.

Raychem

Raychem Corporation
300 Constitution Drive, Menlo Park, California 94025
1-800-2 Raychem FAX: 1-415-361-6287

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

[55PC0222-20-6/9](#) [55PC0222-12-6/9CS2604](#) [55PC0222-22-6/9](#) [55PC0222-16-6/9](#) [55PC0222-18-6/9](#) [55PC0222-20-6/9CS2604](#) [55PC0222-22-6/9CS2604](#) [55PC0222-12-9/96](#) [55PC0222-18-9/96CS2573](#) [55PC0222-14-6/9](#) [55PC0222-10-6/9](#) [55PC0222-16-6/9CS2604](#) [55PC0222-12-6/9](#) [55PC0222-24-0/2](#)