
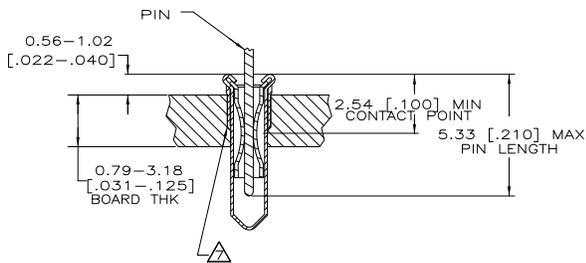


4 3 2 1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
F	LNK	DESCRIPTION	DATE	BY	APP'D
AG	53	REV PER ECO-09-026264	09MAR2010	HMR	DB

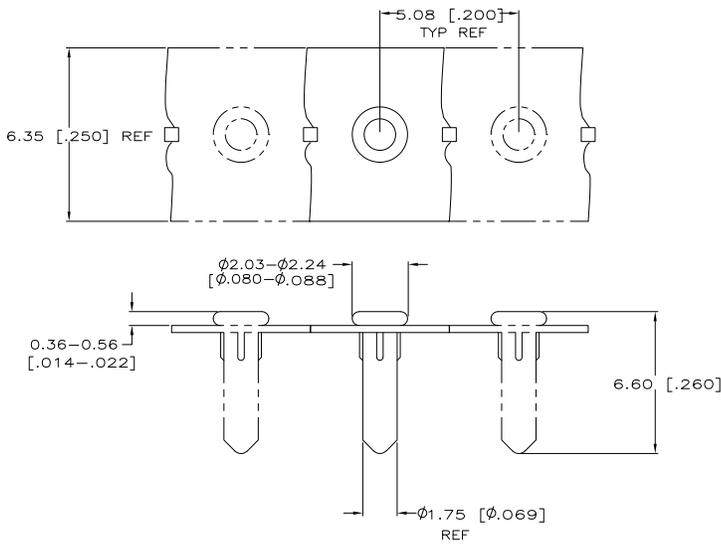

- △ MATERIAL:  
EYELET- COPPER PER ASTM B 152.  
SPRING- BERYLLIUM-COPPER PER ASTM B 194.
- △ TIN PLATE PER ASTM B 545, 0.00254 [0.000100] MINIMUM THICKNESS.
- △ NICKEL UNDERPLATE ALL OVER, MATING SURFACE PLATED TO MEET PERFORMANCE REQUIREMENTS OF TYCO PRODUCT SPECIFICATION 108-14008.
- △ PACKAGE 50,000 PER REEL.
- △ PACKAGE 10,000 PER REEL.
- △ TO ENSURE 1/2 OZ MIN RETENTION, DO NOT EXCEED 0.50 [0.02] DIFFERENCE IN PIN DIA WHEN CHANGING TO A SMALLER DIA PIN.
- △ SHOULDER ON SOCKET PROVIDES RETENTION IN THE P.C. BOARD. THE RECOMMENDED HOLE DIAMETER IS 1.75 [0.069] MINIMUM, + 0.08 [0.003] MAXIMUM PRIOR TO SOLDERING.
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

△ OBSOLETE	△ 5	00.94-01.04 [0.037-0.041]	TIN △	TIN △	1-5645502-2
	△ 5	00.94-01.04 [0.037-0.041]	GOLD △	TIN △	1-5645502-1
	△ 4	00.94-01.04 [0.037-0.041]	GOLD △	TIN △	5645502-1
		PACKAGING PIN DIA △	SPRING EYELET FINISH △		PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG J. POLIGNONE 26MANOR	Tyco Electronics Corporation Harrisburg, PA 17105-3608		
DIMENSIONS: mm [INCHES]		CHK J. HAVENER 26MANOR	MINIATURE SPRING SOCKET ASSY SERIES 4		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APP J. HAVENER 26MANOR	SIZE CASE CODE DRAWING NO		
0 PLG	± .-	PRODUCT SPEC	114-26004		
1 PLG	± .-	APPLICATION SPEC	A2 00779 C=5645502		
2 PLG	± .-	WEIGHT	-		
3 PLG	± 0.20[008]				
4 PLG	± .-				
ANGLES	± .-				
MATERIAL	△	FINISH	SEE TABLE		
		CUSTOMER DRAWING	SCALE 10:1	SHEET 1 of 1	REV B

AMP 1471-9 REV 31MM2000

5645502

A