


Lower Voltage Ceramic Disc Capacitors 2 kVDC to 7.5 kVDC

Fig. 1

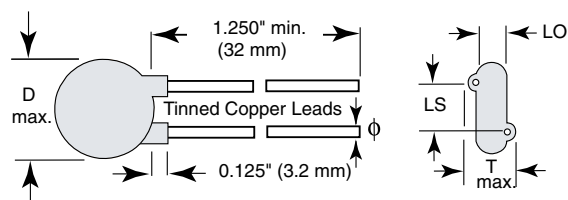

LEAD OFFSET 'LO'		
NOMINAL	~ THICKNESS - 0.100"	
EXCEPTION	0.07" (1.8 mm)	-565R20GAP10
	0.08" (2.0 mm)	-565R30GASS20
	0.10" (2.54 mm)	-565R30GASS33

INSULATION RESISTANCE

2 kVDC	min. 10 000 MΩ
3 kVDC	min. 50 000 MΩ
6 kVDC	min. 75 000 MΩ
7.5 kVDC	min. 200 000 MΩ

TOLERANCE ON CAPACITANCE

± 10 %, ± 20 %, - 20 % to + 80 %

DISSIPATION FACTOR

0.2 % max. at 1 MHz; 1 V
2.0 % max. at 1 kHz; 1 V

CATEGORY TEMPERATURE RANGE

- 25 °C to + 85 °C

CLIMATIC CATEGORY ACC. TO EN60068-1

25/085/21

OPERATING TEMPERATURE RANGE

- 25 °C to + 105 °C

FEATURES

- Low losses
- High capacitance in small sizes
- High stability
- Radial leads
- Compliant to RoHS directive 2002/95/EC



RoHS
COMPLIANT

APPLICATIONS

- Lighting ballasts
- SMPS
- DC and pulse high voltage

DESIGN

The capacitors consist of a ceramic disc of which both sides are silver-plated. Connection leads are made of tinned copper having diameters of 0.025" (0.64 mm) or 0.032" (0.81 mm).

The capacitors may be supplied with radial kinked or straight leads having lead spacing of 0.250" (6.35 mm) or 0.375" (9.5 mm) or 0.500" (12.7 mm)

The standard tolerances are ± 10 % or ± 20 %.

Coating is made of resin coating or flame retardant epoxy resin in accordance with "UL 94 V-0".

CAPACITANCE RANGE

10 pF to 0.10 μF

RATED VOLTAGE

2 kVDC
3 kVDC
6 kVDC
7.5 kVDC

DIELECTRIC STRENGTH BETWEEN LEADS

Component test:

2 kVDC	3500 VDC, 2 s
3 kVDC	5000 VDC, 2 s
6 kVDC	10 500 VDC, 2 s
7.5 kVDC	11 250 VDC, 2 s

CERAMIC DIELECTRIC

C0G, U2J, R3L, (Class 1)
X7R, X5F, X5S, Y5S, Y5U, Y5V, Z5U (Class 2)

564R and 565R Series

Vishay Cera-Mite

Lower Voltage Ceramic Disc Capacitors
2 kVDC to 7.5 kVDC



ORDERING INFORMATION, CERAMIC 2 kVDC							
C (pF)	TOL. (%)	D DIAMETER INCH (mm)	T THICKNESS INCH (mm)	LS LEAD SPACE INCH (mm)	WIRE SIZE		ORDERING CODE
					AWG	INCH (mm)	
X7R							
100	± 10 %	0.330 (8.4)	0.190 (4.8)	0.250 (6.4)	20	0.032 (0.81)	564R20TST10
220			0.180 (4.6)				564R20TST22
330							564R20TST33
470			0.170 (4.3)				564R20TST47
560			0.185 (4.7)				564R20TST56
680			0.170 (4.3)				564R20TST68
1000		0.400 (10.2)	0.175 (4.4)				564R20TSD10
1500		0.430 (10.9)	0.160 (4.1)				564R20TSD15
1800		0.460 (11.7)	0.170 (4.3)				564R20TSD18
2200							564R20TSD22
2700							564R20TSD27
3300		0.530 (13.5)	0.160 (4.1)				564R20TSD33
3900		0.680 (17.3)	0.170 (4.3)				564R20TSD39
4700				0.375 (9.5)			564R20TSD47
Y5S							
1000	± 20 %	0.330 (8.4)	0.175 (4.4)	0.250 (6.4)	20	0.032 (0.81)	564R20TSSD10
1500		0.400 (10.2)	0.170 (4.3)				564R20TSSD15
1800		0.430 (10.9)					564R20TSSD18
2200		0.460 (11.7)					564R20TSSD22
2700		0.530 (13.5)					0.175 (4.4)
3300			564R20TSSD33				
3900			564R20TSSD39				
4700		0.620 (15.7)	0.170 (4.3)	564R20TSSD47			
5600		0.680 (17.3)		564R20TSSD56			
6800		0.720 (18.3)		564R20TSSD68			
Y5U							
1000	± 20 %	0.330 (8.4)	0.170 (4.3)	0.250 (6.4)	20	0.032 (0.81)	564R20GAD10
1500		0.330 (8.4)	0.170 (4.3)				564R20GAD15
Z5U							
1800	± 20 %	0.360 (9.1)	0.170 (4.3)	0.250 (6.4)	20	0.032 (0.81)	564R20GAD18
2200		0.400 (10.2)	0.175 (4.4)				564R20GAD22
2700		0.430 (10.9)					564R20GAD27
3300							564R20GAD33
3900							0.490 (12.4)
4700		564R20GAD47					
6800		0.560 (14.2)	0.170 (4.3)	564R20GAD68			
0.010 μF		0.680 (17.3)		0.375 (9.5)			564R20GAS10
Y5V							
0.010 μF	± 20 %	0.620 (15.7)	0.170 (4.3)	0.375 (9.5)	20	0.032 (0.81)	564R20GASS10
0.10 μF		0.950 (24.1)	0.240 (6.1)		22	0.025 (0.64)	565R20GAP10

TAPE AND REEL OPTIONS

- To specify tape and reel, add two letter suffix to the ordering code (for details of the packaging code see general section of the catalog)



564R and 565R Series

Lower Voltage Ceramic Disc Capacitors
2 kVDC to 7.5 kVDC

Vishay Cera-Mite

ORDERING INFORMATION, CERAMIC 3 kVDC

C (pF)	TOL. (%)	D DIAMETER INCH (mm)	T THICKNESS INCH (mm)	LS LEAD SPACE INCH (mm)	WIRE SIZE		ORDERING CODE
U2J (N750)							
10	± 20 %	0.330 (8.4)	0.210 (5.3)	0.250 (6.4)	20	0.032 (0.81)	564R30GAQ10
12			0.210 (5.3)				564R30GAQ12
15			0.180 (4.6)				564R30GAQ15
R3L (N2200)							
22	± 20 %	0.330 (8.4)	0.200 (5.1)	0.250 (6.4)	20	0.032 (0.81)	564R30GAQ22
27			0.190 (4.8)				564R30GAQ27
33			0.170 (4.3)				564R30GAQ33
X7R							
47	± 20 %	0.330 (8.4)	0.230 (5.8)	0.250 (6.4)	20	0.032 (0.81)	564R30GAQ47
56			0.190 (4.8)				564R30GAQ56
68			0.200 (5.1)				564R30GAQ68
100			0.180 (4.6)				564R30GAT10
150			0.190 (4.8)				564R30GAT15
220			0.175 (4.4)				564R30GAT22
270			0.180 (4.6)				564R30GAT27
330			0.175 (4.4)				564R30GAT33
390	564R30GAT39						
470	± 10 %	0.400 (10.2)	0.180 (4.6)	0.375 (9.5)	20	0.032 (0.81)	564R30GAT47
680			0.175 (4.4)				564R30TST68
1000			0.185 (4.7)				564R30TSD10
1500			0.185 (4.7)				564R30TSD15
1800		0.530 (13.5)	0.185 (4.7)				564R30TSD18
2200			0.180 (4.6)				564R30TSD22
2700		0.620 (15.7)	0.185 (4.7)				564R30TSD27
3300			0.170 (4.3)				564R30TSD33
3900		0.720 (18.3)	0.185 (4.7)				564R30TSD39
4700			0.175 (4.4)				564R30TSD47
6800	0.900 (22.9)	0.185 (4.7)	564R30TSD68				
Y5S							
1000	± 20 %	0.400 (10.2)	0.190 (4.8)	0.250 (6.4)	20	0.032 (0.81)	564R30TSSD10
1500		0.460 (11.7)					564R30TSSD15
1800		0.490 (12.4)					564R30TSSD18
2200		0.530 (13.5)					564R30TSSD22
2700		0.560 (14.2)	0.185 (4.7)	564R30TSSD27			
3300		0.620 (15.7)		564R30TSSD33			
3900		0.680 (17.3)		564R30TSSD39			
4700		0.790 (20.0)		564R30TSSD47			
5600		0.900 (22.9)	0.190 (4.8)	564R30TSSD56			
6800		0.205 (5.2)	564R30TSSD68				
Y5U							
680	± 20 %	0.330 (8.4)	0.175 (4.4)	0.250 (6.4)	20	0.032 (0.81)	564R30GAT68
Z5U							
1000	± 20 %	0.330 (8.4)	0.195 (5.0)	0.250 (6.4)	20	0.032 (0.81)	564R30GAD10
1500		0.360 (9.1)	0.190 (4.8)				564R30GAD15
1800		0.400 (10.2)					564R30GAD18
2200		0.430 (10.9)					564R30GAD22
2700		0.460 (11.7)	0.200 (5.1)	0.375 (9.5)			564R30GAD27
3300		0.490 (12.4)	0.185 (4.7)				564R30GAD33
3900		0.530 (13.5)	564R30GAD39				
4700		0.620 (15.7)	0.195 (5.0)				564R30GAD47
6800		0.680 (17.3)	0.185 (4.7)				564R30GAD68
8200							564R30GAD82
0.010 µF		0.790 (20.0)	0.240 (6.1)				564R30GAS10
0.020 µF		0.720 (18.3)					565R30GASS20
0.033 µF		0.900 (22.9)					565R30GASS33
Y5V							
0.010 µF	± 20 %	0.720 (18.3)	0.185 (4.7)	0.375 (9.5)	20	0.032 (0.81)	564R30GASS10

TAPE AND REEL OPTIONS

• To specify tape and reel, add two letter suffix to the ordering code (for details of the packaging code see general section of the catalog)



564R and 565R Series

Lower Voltage Ceramic Disc Capacitors
2 kVDC to 7.5 kVDC

Vishay Cera-Mite

ORDERING INFORMATION, CERAMIC 6 kVDC

C (pF)	TOL. (%)	D DIAMETER INCH (mm)	T THICKNESS INCH (mm)	LS LEAD SPACE INCH (mm)	WIRE SIZE		ORDERING CODE
AWG							
INCH (mm)							
C0G (NP0)							
10	± 20 %	0.400 (10.2)	0.220 (5.6)	0.375 (9.5)	20	0.032 (0.81)	564R60GAQ10
U2J (N750)							
22	± 20 %	0.460 (11.7)	0.240 (6.1)	0.375 (9.5)	20	0.032 (0.81)	564R60GAQ22
R3L (N2200)							
33	± 20 %	0.400 (10.2)	0.230 (5.8)	0.375 (9.5)	20	0.032 (0.81)	564R60GAQ33
47		0.460 (11.7)	0.205 (5.2)				564R60GAQ47
X5F							
100	± 20 %	0.400 (10.2)	0.240 (6.1)	0.375 (9.5)	20	0.032 (0.81)	564R60GAT10
220			0.265 (6.7)				564R60GAT22
X5S							
330	± 20 %	0.400 (10.2)	0.260 (6.6)	0.375 (9.5)	20	0.032 (0.81)	564R60GAT33
Y5U							
470	± 20 %	0.400 (10.2)	0.265 (6.7)	0.375 (9.5)	20	0.032 (0.81)	564R60GAT47
560			0.240 (6.1)				564R60GAT56
Z5U							
1000	± 20 %	0.400 (10.2)	0.270 (6.9)	0.375 (9.5)	20	0.032 (0.81)	564R60GAD10
1500		0.460 (11.7)	0.280 (7.1)				564R60GAD15
2200		0.530 (13.5)	0.240 (6.1)				564R60GAD22
3300		0.620 (15.7)	0.260 (6.6)				564R60GAD33
4700		0.790 (20.0)					564R60GAD47
0.010 µF		0.950 (24.1)	0.250 (6.4)				564R60GAS10

ORDERING INFORMATION, CERAMIC 7.5 kVDC

C (pF)	TOL. (%)	D DIAMETER INCH (mm)	T THICKNESS INCH (mm)	LS LEAD SPACE INCH (mm)	WIRE SIZE		ORDERING CODE
					AWG	INCH (mm)	
X5F							
100	± 20 %	0.530 (13.5)	0.310 (7.9)	0.500 (12.7)	20	0.032 (0.81)	564R75GAT10
470		0.620 (15.7)	0.270 (6.9)				564R75GAT47
Y5U							
1000	+ 80/- 20 %	0.620 (15.7)	0.320 (8.1)	0.500 (12.7)	20	0.032 (0.81)	564R75GAD10
Z5U							
2500	+ 80/- 20 %	0.620 (15.7)	0.280 (7.1)	0.500 (12.7)	20	0.032 (0.81)	564R75GAD25



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.