
5693F-A Series PC Board, 3-Up T-1 LEDs

DESCRIPTION AND FEATURES

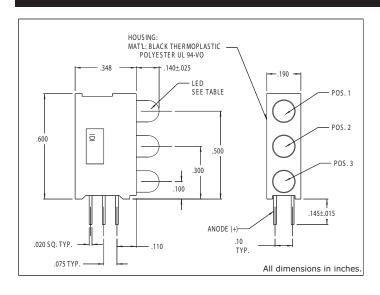

Features:

- 3T-1 LEDs stack mounted in single block saves space and assembly time.
- High Brite and Super Brite light output.
- · S tandoffs prevent flux entrapment.
- · Black plastic mounting block for high contrast ratio.
- Meets UL 94V-O and Bellcore flammability specifications.

Available options:

- · Low current, 5V and 12V built-in resistors.
- · Bi-color and blue LEDs also offered.
- · Call factory for ordering information.

Mounting hole pattern on page 1-X3.

Ordering Information: Use chart below to determine model number.

Red		Amber	Green	Yellow	
LED	1	3	5	7	

Model No. is as follows: 5693F Pos. 1; Pos. 2; Pos. 3

Example: Position 1 is red, position 2 is yellow, position 3 is green. The part number is 5693F1;7;5.

ELECTRO-OPTICAL CHARACTERISTICS AND RATINGS

		Rated Current (mA)	Тур.	Continuous Forward Current Max. (mA)	Forward Voltage		Reverse	Peak
Part Number	E mitted C olor		Intensity (mcd)		Typ. (V)	Max. (V)	Breakdown Voltage Min.(V)	Wavelength (nm)
5693F1	Red	10	10.0	30	2.0	3.0	5.0	650
5693F3	Amber	10	7.0	30	2.2	3.0	5.0	603
5693F5	Green	10	16.0	30	2.2	3.0	5.0	562
5693F7	Yellow	10	6.3	30	2.1	3.0	5.0	585

147 Central Avenue Hackensack, NJ 07601 Phone: (201) 489-8989 Fax: (201) 489-6911 18703 Dix Toledo Road Brownstown, MI 48193 Saret Zone Franca, Edifico B Alajuela Costa Rica

E-mail:sales@chml.com • Web Site: www.chml.com