
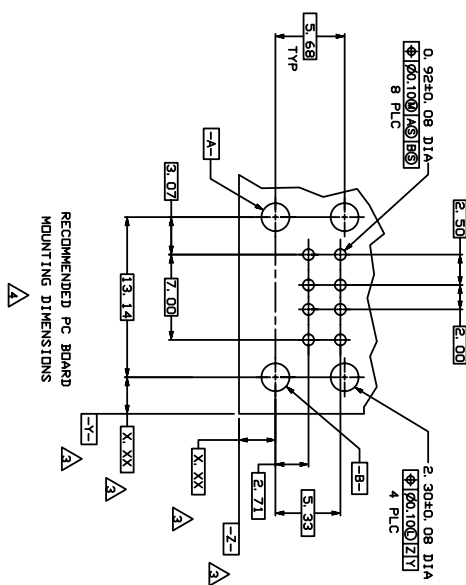


- △ MATERIAL, SHELL & CONTACTS - COPPER ALLOY, HOUSING - UL 94V-0 RATED, THERMOPLASTIC. SEE TABLE.
- △ PLATING:
 - 1. 0.076in MINIMUM GOLD OVER A 76in MINIMUM CONTACT NICKEL AND 10in MINIMUM END PLATING AREA.
 - 2. 3.80in MINIMUM GOLD OVER CONTACT ALTHOUGH PLATING TO 76in MINIMUM GOLD AND PLATING AREA.
 - 3. 8.0in MINIMUM WHITE TIN ON SOLDER TAILS.
 - 4. BOTH OVER 1.27in MINIMUM NICKEL.
 - 5. SHELL 2-50in MINIMUM BRIGHT TIN
- △ DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- △ RECOMMENDED PC BOARD THICKNESS OF 1.57.
- △ PLATING:
 - 1. 0.127in MINIMUM GOLD ON MATING AREA,
 - 2. 3.80in MINIMUM WHITE TIN ON SOLDER TAILS,
 - 3. 8.0in MINIMUM WHITE TIN ON SOLDER TAILS,
 - 4. ALL OVER 7.6in MINIMUM NICKEL ON ENTIRE CONTACT,
 - 5. SHELL 2-50in MINIMUM BRIGHT TIN
 - 6. PACKED IN TRAYS

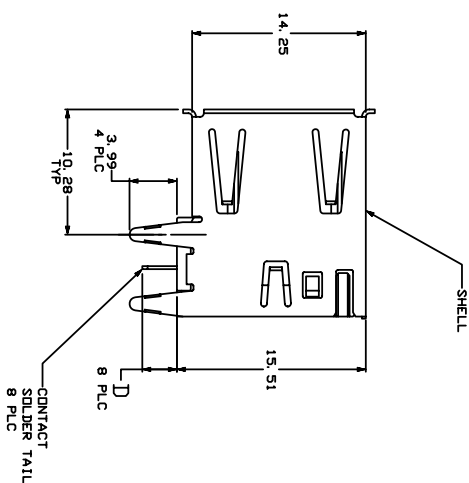

PART NUMBER	COMPATIBLE		
	HOUSING COLOR	D	HIGH TEMPERATURE COMPATIBLE
A	BLACK	2 8440 25	NO
	NATURAL	2 8440 25	YES
A	BLACK	2 8440 25	YES
	NATURAL	2 8440 25	YES
A	BLACK	2 8440 25	YES
	NATURAL	2 8440 25	YES
A	BLACK	2 8440 25	NO
	NATURAL	2 8440 25	NO
A	BLACK	2 8440 25	NO
	NATURAL	2 8440 25	NO

[illegible]