

Datasheet

20 way IDC edge connector

RS Stock 471-266




Specifications



- Material: Molding - UL94VO rated glass filled grey polyester
- Contact Plating: Contact - Phosphor bronze
- Contact Plating: Contacts are selective gold-plated over nickel, reflow tin lead on IDC section
- Current Rating: 1 ampere at 70°C maximum ambient
- Working Voltage: 350V DC or AC peak
- Insulation Resistance: >1000 megohms
- Voltage Proof: 1050 DC or AC peak
- Operating Temperature: -55°C to +105°C
- Wire Gauge: 26 AWG Solid & Stranded 28 AWG Solid & Stranded

Dimensions: (mm)


ENGLISH




FULL END FLANGE

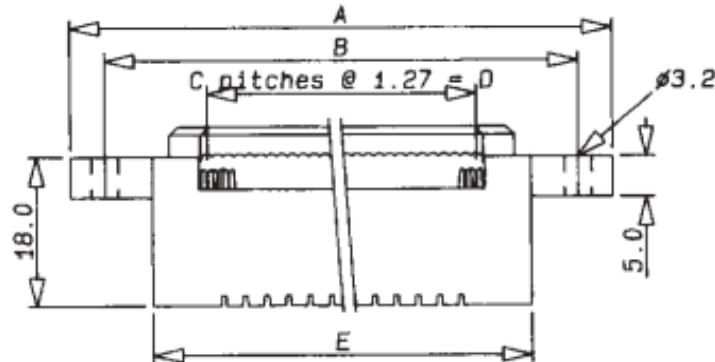

HALF END FLANGE

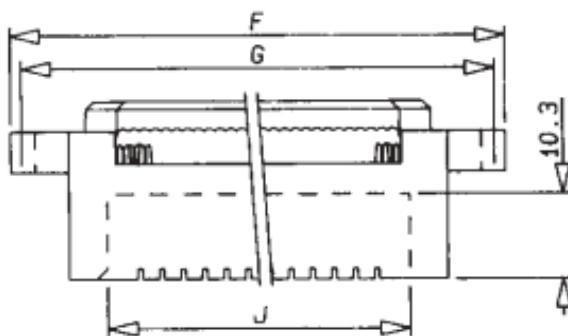

NO END FLANGE

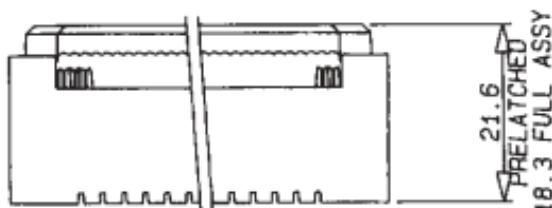

PRELATCHED
18.3 FULL ASSY