


59630 Sensor with Integral Float Actuator

RoHS

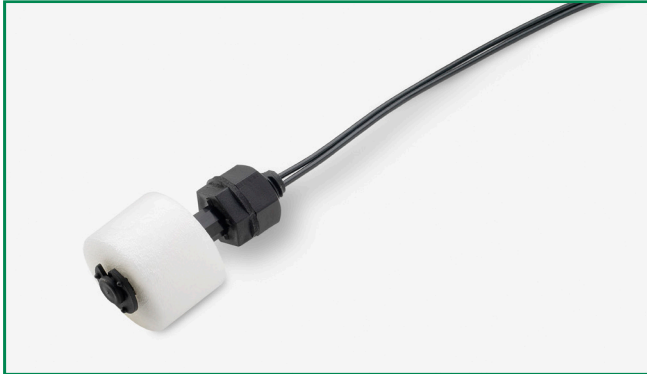

Description


The 59630 is a reed level sensor with integral float actuator and an M8 x 1.25mm pitch thread with a choice of normally open, normally open high voltage, normally closed or change over contacts. It is capable of switching up to 265Vac/300Vdc at 10VA. It is ideally suited to liquid and air conditioning condensate and industrial process control applications.

Features

- Sensor with integral blown polypropylene float, with integral magnet
- Sensor operates when float rises from end stop position
- Choice of contacts
- Choice of connector and cable length options

Dimensions

Dimensions in mm (inch)

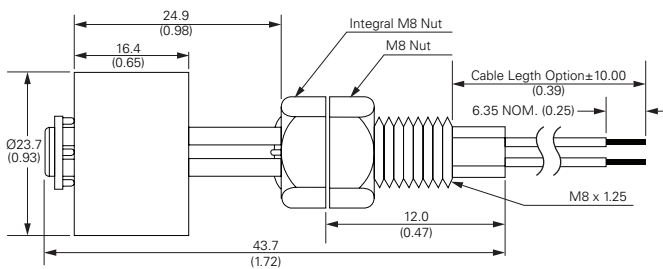


Benefits

- Hermetically sealed, magnetically operated contacts continue to operate long after optical and other technologies fail due to contamination
- No standby power required
- Simple installation with M8 thread and nut

Applications

- Liquid level control
- Air conditioning systems
- Industrial Process Control

Schematics	Switch Type
	1 and 2
	3
	4

59630 Sensor with Integral Float Actuator

Electrical Ratings

Contact Type			Normally Open	Normally Open High Voltage	Change Over	Normally Closed
Switch Type			1	2	3	4
Contact Rating ¹		VA/Watt - max.	10	10	5	10
Voltage ⁴	Switching ²	Vdc - max.	200	300	175	200
		Vac - max.	140	265	120	120
	Breakdown ³	Vdc - min.	250	400	200	250
Current ⁴	Switching ²	Adc - max.	0.5	0.4	0.25	0.5
		Aac - max.	0.35	0.30	0.18	0.18
	Carry	Adc - max.	1.2	1.4	1.5	1.2
Resistance ⁵	Contact, Initial Insulation	Ω - max.	0.2	0.2	0.2	0.2
		Ω - min.	10 ¹⁰	10 ¹⁰	10 ⁹	10 ¹⁰
Capacitance	Contact	pF - typ.	0.3	0.2	0.3	0.3
Temperature	Operating	°C	-40 to +105	-20 to +105	-40 to +105	-40 to +105

Product Characteristics


Operate Time ⁶		ms - max.	1.0	1.0	3.0	3.0
Release Time ⁶		ms - max.	1.0	1.0	3.0	3.0
Shock ⁷	11ms ½ sine	G - max.	100	100	50	50
Vibration ⁷	50-2000 Hz	G - max.	30	30	30	30

Notes:

1. Contact rating - Product of the switching voltage and current should never exceed the wattage rating. Contact Littelfuse for additional load/life information.
2. When switching inductive and/or capacitive loads, the effects of transient voltages and/or currents should be considered. Refer to Application Notes AN108A and AN107 for details.
3. Breakdown Voltage - per MIL-STD-202, Method 301.
4. Electrical Load Life Expectancy - Contact Littelfuse with voltage, current values along with type of load.
5. This resistance value is for 11.81mm wire length. Resistance changes when wire lengthens.
6. Operate (including bounce)/Release Time - per EIA/NARM RS-421-A, diode suppressed coil (Coil II).
7. Shock and Vibration - per EIA/NARM RS-421-A and MIL-STD-202.
8. For custom modifications to the wire length or size, or adding a special connector, please contact Littelfuse.

Activation

Using sensor with float magnet orientated is illustrated

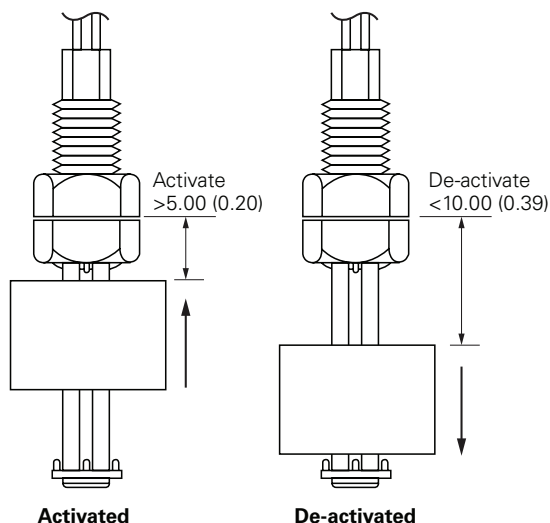

59630 Sensor with Integral Float Actuator



Cable Length Specification

Cable Type: 24 AWG 7/32 PVC 105°C UL1430/UL1569


Select Option	Cable Length mm (inch)
02	300 (11.81)

Termination Specification

Termination Options

Select Option	Description (Two-wire versions illustrated)
A	Tinned leads (6.4±0.76)mm 
F	Untinned leads (6.4±0.76)mm 
E	JST type XHP 2.5mm pitch 

Part Numbering System

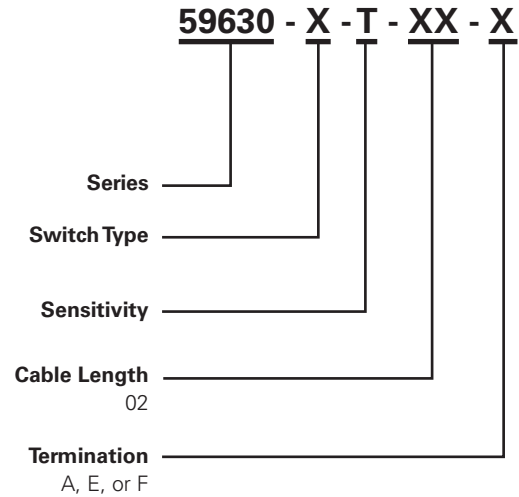

Packaging

Packaging Option	Packaging Specification	Quantity	Quantity & Packaging Code	Taping Width
Bulk	Bulk	500	N/A	N/A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Littelfuse:

[59630-3-T-02-A](#) [59630-4-T-02-A](#) [59630-2-T-02-A](#) [59630-1-T-02-A](#) [59630-1-T-04-A](#) [59630-1-T-01-D](#) [59630-2-T-01-D](#) [59630-4-T-02-C](#) [59630-2-T-05-A](#) [59630-2-T-05-D](#) [59630-3-T-05-A](#) [59630-4-T-03-F](#) [59630-4-T-04-D](#) [59630-4-T-05-A](#) [59630-2-T-03-D](#) [59630-2-T-05-E](#) [59630-3-T-01-E](#) [59630-1-T-04-E](#) [59630-1-T-05-F](#) [59630-2-T-04-A](#) [59630-4-T-02-E](#) [59630-4-T-05-D](#) [59630-2-T-02-D](#) [59630-3-T-03-A](#) [59630-4-T-05-E](#) [59630-2-T-03-C](#) [59630-4-T-04-F](#) [59630-2-T-05-C](#) [59630-2-T-03-A](#) [59630-3-T-03-E](#) [59630-3-T-04-D](#) [59630-3-T-04-C](#) [59630-3-T-01-F](#) [59630-3-T-02-D](#) [59630-4-T-01-C](#) [59630-4-T-05-C](#) [59630-1-T-03-C](#) [59630-4-T-04-C](#) [59630-2-T-01-C](#) [59630-2-T-04-F](#) [59630-2-T-03-F](#) [59630-3-T-02-F](#) [59630-4-T-03-C](#) [59630-4-T-05-F](#) [59630-1-T-04-C](#) [59630-1-T-05-E](#) [59630-2-T-01-F](#) [59630-4-T-01-A](#) [59630-4-T-01-F](#) [59630-4-T-03-E](#) [59630-3-T-04-E](#) [59630-4-T-02-F](#) [59630-4-T-04-A](#) [59630-1-T-01-A](#) [59630-4-T-01-E](#) [59630-1-T-03-F](#) [59630-3-T-04-F](#) [59630-3-T-05-C](#) [59630-1-T-04-F](#) [59630-2-T-01-A](#) [59630-2-T-04-D](#) [59630-4-T-04-E](#) [59630-3-T-03-F](#) [59630-1-T-01-E](#) [59630-1-T-01-F](#) [59630-1-T-03-E](#) [59630-3-T-02-C](#) [59630-3-T-02-E](#) [59630-2-T-04-E](#) [59630-4-T-01-D](#) [59630-4-T-02-D](#) [59630-3-T-03-D](#) [59630-3-T-05-D](#) [59630-4-T-03-A](#) [59630-3-T-05-E](#) [59630-3-T-05-F](#) [59630-4-T-03-D](#) [59630-2-T-02-C](#) [59630-2-T-04-C](#) [59630-3-T-04-A](#) [59630-3-T-03-C](#) [59630-1-T-04-D](#) [59630-1-T-05-C](#) [59630-1-T-05-D](#) [59630-2-T-01-E](#) [59630-3-T-01-D](#) [59630-1-T-02-F](#) [59630-3-T-01-C](#) [59630-1-T-01-C](#) [59630-1-T-03-D](#) [59630-1-T-02-D](#) [59630-3-T-01-A](#) [59630-2-T-02-E](#) [59630-2-T-02-F](#) [59630-2-T-03-E](#) [59630-2-T-05-F](#) [59630-1-T-02-C](#) [59630-1-T-02-E](#)