

# Type 5SF / 5SFP

## Quick - acting Fuse Series (Low Breaking Capacity)

HF Pb 5SF/5SFP Series, 5x20mm Glass Tube Quick-acting Fuse

RoHS 6 Compliant

### Description

5x20mm quick-acting, low breaking capacity, glass tube body cartridge fuse designed, approved and complied with IEC 60127-2, standard sheet 2.

### Features


- Meet IEC standard 60127-2, sheet 2
- Wide operating temperature range
- Bulk and Tape & Reel packing available
- RoHS 6 compliant
- Halogen Free
- Leadfree

### Applications

Provide individual protection for components or internal circuits.

- Power supplies
- Battery charger
- Monitor
- Adapter

LEAD FREE =   
HALOGEN FREE = 

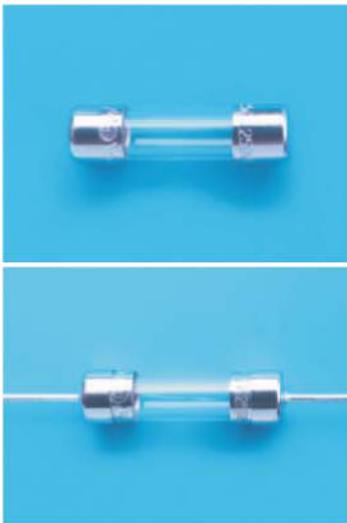

### Physical Specifications

Materials	Body : Glass
	Cap : Nickel Plated Brass Caps
	Leads : Matte Tin Plated Copper
Marking	On Fuse :
	"bel", "F", "Current Rating", "L", "250V",
	"Appropriate Safety Logos", "✓" (RoHS 6 compliant)
	On Label :
	"bel", "5SF" or "5SFP", "Current Rating", "Voltage Rating", "Interrupting Rating", "Appropriate Safety Logos" and "☒", "☉" (China RoHS compliant).

### Electrical Characteristics (IEC-127-2 STANDARD SHEET 2)

Rated Current	1.5 In		2.1 In		2.75 In		4 In		10 In
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MAX
80mA to 100mA	1	30	10	0.5	3	100	20		
125mA to 6.3A	1	30	50	2	10	300	20		
8A to 10A	1	30	50	2	10	400	40		
	hr.	min.	ms	sec	ms	ms	ms		

In clause 9.2, the test voltage for 5SFP ratings from 1A to 6.3A is 63VDC.

### Safety Agency Approvals

SAFETY AGENCY	SAFETY AGENCY CERTIFICATE NUMBER	VOLTAGE RATING (V)	AMPERE RANGE / VOLT @ I.R. ABILITY*
	1513385	80mA - 10A / 250V AC	80mA - 6.3A / 250V AC @ 35A or 10 In whichever is greater
	40000509		
	E20624		80mA - 10A / 250V AC @ 35A or 10 In whichever is greater
	LR39772		80mA - 6.3A / 250V AC @ 35A or 10 In whichever is greater
	2003010207030263		

\* I.R. = INTERRUPTING RATING = SHORT CIRCUIT RATING (AMPS)

Specifications subject to change without notice



Bel Fuse Inc.  
206 Van Vorst Street  
Jersey City, NJ 07302 USA

+1 201.432.0463  
techhelp@belf.com  
[belfuse.com](http://belfuse.com)

# Type 5SF / 5SFP

## Quick - acting Fuse Series (Low Breaking Capacity)

HF Pb 5SF/5SFP Series, 5x20mm Glass Tube Quick-acting Fuse

RoHS 6 Compliant

### Environmental Specifications

Shock Resistance	MIL-STD-202G, Method 213B, Test Condition 1 (100 G's peak for 6 milliseconds; Sawtooth waveform)
Vibration Resistance	MIL-STD-202G, Method 201A(10-55 Hz, 0.06 inch, total excursion).
Salt Spray Resistance	MIL-STD-202G, Method 101E, Test Condition B(48 hrs).
Insulation Resistance	MIL-STD-202G, Method 302, Test Condition B (After Opening) 100, 000 ohms minimum.
Solderability	MIL-STD-202G, Method 208H
Resistance to solder Heat	MIL-STD-202G, Method 210F, Test Condition B.(260+/-5 °C,10+/-1 sec)
Thermal Shock	MIL-STD-202G, Method 107G, Test Condition B (-65 °C to +125 °C).
Operating Temperature	-55 °C to +125 °C
Terminal Strength	IEC-68-2-21

### Electrical Specifications

Catalog Number	Ampere Rating	Typical Cold Resistance (ohm)	Volt-drop @100% In (Volt) max.	Voltage and Interrupting Ratings	Melting I <sup>2</sup> T <10 mSec (A <sup>2</sup> Sec)	Melting I <sup>2</sup> T @10 In (A <sup>2</sup> Sec)	Maximum Power Dissipation (W)	Agency Approvals				
								UL	CSA	CCC	S	CE
5SF(P) 80-R	80mA	7.4	0.93	See Table of Safety Approvals on Page 1 for Voltage and associated Interrupting Ratings	0.003	0.003	0.39	Y	Y	Y	Y	Y
5SF(P) 100-R	100mA	4.9	0.89		0.005	0.005	0.44	Y	Y	Y	Y	Y
5SF(P) 125-R	125mA	3.6	0.84		0.009	0.008	0.50	Y	Y	Y	Y	
5SF(P) 160-R	160mA	2.25	0.61		0.017	0.015	0.57	Y	Y	Y	Y	Y
5SF(P) 200-R	200mA	1.10	0.33		0.033	0.028	0.64	Y	Y	Y	Y	Y
5SF(P) 250-R	250mA	0.84	0.33		0.05	0.05	0.73	Y	Y	Y	Y	Y
5SF(P) 315-R	315mA	0.58	0.32		0.10	0.09	0.83	Y	Y	Y	Y	Y
5SF(P) 400-R	400mA	0.47	0.31		0.17	0.17	0.94	Y	Y	Y	Y	Y
5SF(P) 500-R	500mA	0.31	0.27		0.40	0.40	0.12	Y	Y	Y	Y	Y
5SF(P) 630-R	630mA	0.152	0.13		0.64	0.65	0.15	Y	Y	Y	Y	Y
5SF(P) 800-R	800mA	0.112	0.13		1.0	1.0	0.20	Y	Y	Y	Y	Y
5SF(P) 1-R	1A	0.088	0.13		1.6	1.7	0.27	Y	Y	Y	Y	Y
5SF(P) 1.25-R	1.25A	0.065	0.12		2.5	2.7	0.35	Y	Y	Y	Y	Y
5SF(P) 1.6-R	1.6A	0.050	0.11		4.0	4.4	0.47	Y	Y	Y	Y	Y
5SF(P) 2-R	2A	0.034	0.10		6	7	0.62	Y	Y	Y	Y	Y
5SF(P) 2.5-R	2.5A	0.026	0.10		10	11	0.82	Y	Y	Y	Y	Y
5SF(P) 3.15-R	3.15A	0.022	0.10		16	18	1.08	Y	Y	Y	Y	Y
5SF(P) 4-R	4A	0.017	0.10		26	30	1.43	Y	Y	Y	Y	Y
5SF(P) 5-R	5A	0.013	0.10		41	48	1.89	Y	Y	Y	Y	Y
5SF(P) 6.3-R	6.3A	0.010	0.10		65	74	2.50	Y	Y	Y	Y	Y
5SF(P) 8-R	8A	0.007	0.08	103	119	3.30	Y	Y				
5SF(P) 10-R	10A	0.006	0.08	163	192	4.37	Y	Y				

Consult manufacturer for other ratings

Specifications subject to change without notice



Bel Fuse Inc.  
206 Van Vorst Street  
Jersey City, NJ 07302 USA

+1 201.432.0463  
techhelp@belf.com  
[belfuse.com](http://belfuse.com)


# Type 5SF / 5SFP

## Quick - acting Fuse Series (Low Breaking Capacity)


HF  5SF/5SFP Series, 5x20mm Glass Tube Quick-acting Fuse

RoHS 6 Compliant

### Average Time Current Curve

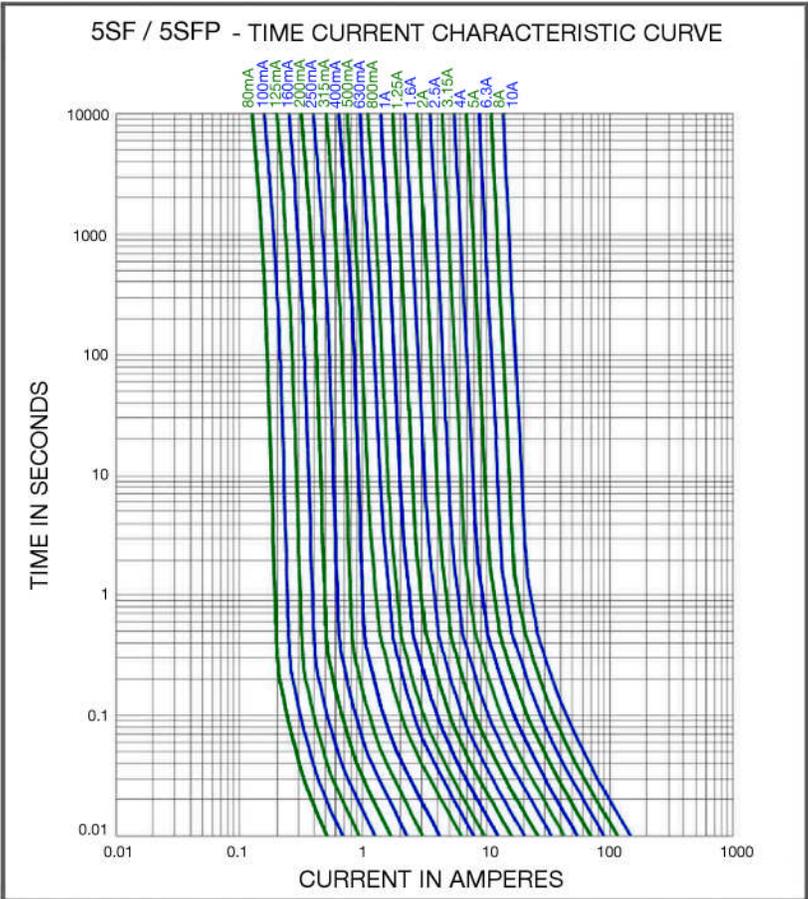


### Temperature Derating Curve

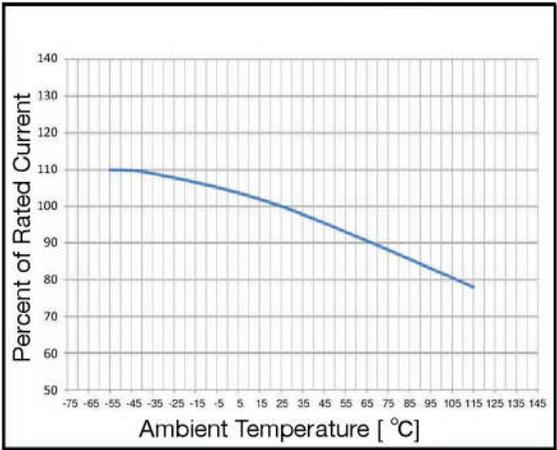

### Soldering Parameters

Lead-free Wave Soldering Profile	
Wave Soldering Parameter	
Average ramp-up rate	200 °C / second
Heating rate during preheat	typical 1 - 2 °C / second Max 4 °C / second
Final preheat temperature	within 125 °C of soldering temperature
Peak temperature Tp	260 °C
Time within +0 °C / -5 °C of actual peak temperature	10 seconds
Ramp-down rate	5 °C / second max.

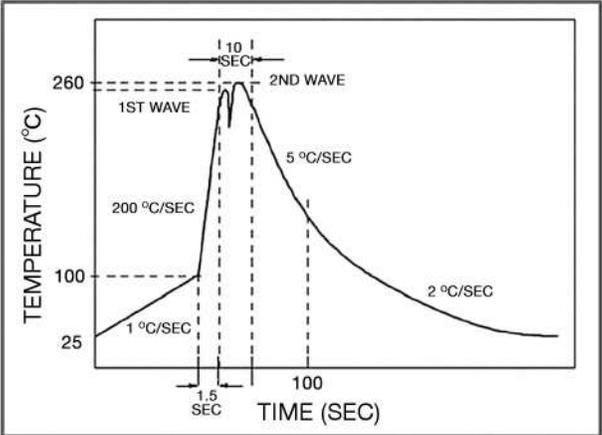

Specifications subject to change without notice



a bel group

Bel Fuse Inc.  
206 Van Vorst Street  
Jersey City, NJ 07302 USA

+1 201.432.0463  
techhelp@belf.com  
[belfuse.com](http://belfuse.com)

# Type 5SF / 5SFP

## Quick - acting Fuse Series (Low Breaking Capacity)


HF  5SF/5SFP Series, 5x20mm Glass Tube Quick-acting Fuse

RoHS 6 Compliant

### Fuse FGNO Explanation 06XX X [XXXX] X XX, [XXXX]=Ampere Rating


Fraction	Decimal	Milliamps	Bel FGNO[XXXX]	Fraction	Decimal	Amps	Bel FGNO[XXXX]
1/32	0.032	32	0032	1-1/4	1.25	1.25	1250
1/25	.040	40	0040	1-1/2	1.50	1.5	1500
1/20	.050	50	0050		1.60	1.6	1600
1/16	.063	63	0063		2.0	2	2000
8/100	.080	80	0080	2-1/4	2.25	2.25	2250
1/10	.100	100	0100	2-1/2	2.5	2.5	2500
1/8	.125	125	0125		3.0	3	3000
15/100	.150	150	0150		3.15	3.15	3150
	.160	160	0160	3-1/2	3.5	3.5	3500
2/10	.200	200	0200		4.0	4	4000
1/4	.250	250	0250		5.0	5	5000
3/10	.300	300	0300		6.0	6	6000
	.315	315	0315		6.3	6.3	6300
3/8	.375	375	0375		7.0	7	7000
4/10	.400	400	0400	7-1/2	7.5	7.5	7500
1/2	.500	500	0500		8.0	8	8000
6/10	.600	600	0600			10	9100
	.630	630	0630			12	9120
7/10	.700	700	0700			15	9150
3/4	.750	750	0750			20	9200
8/10	.800	800	0800			25	9250
						30	9300

### Mechanical Dimensions

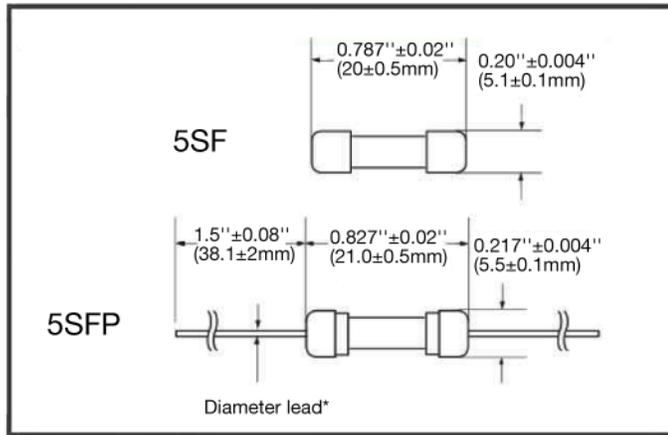

\*Ratings 6.3A and less have 0.032" diameter lead  
\*Ratings 8A and above have 0.040" diameter lead

### Ordering Information

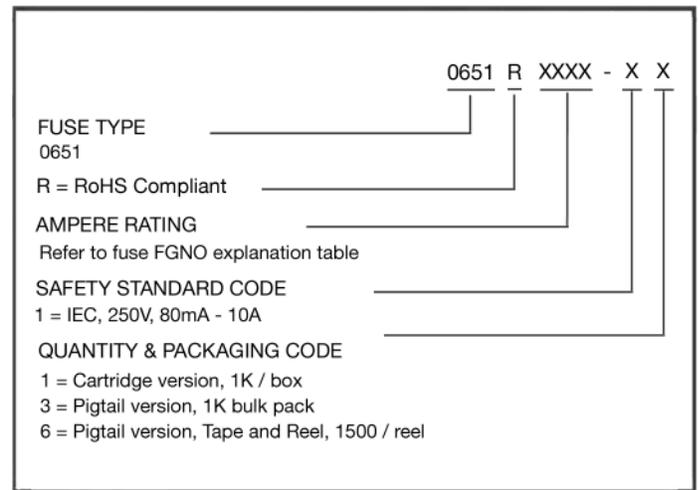

### Packaging

Packaging Option	Packaging Specification	Quantity	Packaging Code	Inside Tape Spacing
Bulk	N/A	1000	11	N/A
Bulk ( Pigtail Type )	N/A	1000	13	N/A
Tape & Reel, 10 mm Pitch	EIA-296-F	1500	16	63

Specifications subject to change without notice



Bel Fuse Inc.  
206 Van Vorst Street  
Jersey City, NJ 07302 USA

+1 201.432.0463  
techhelp@belf.com  
[belfuse.com](http://belfuse.com)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Bel:](#)

[5SF 315-R](#) [5SF 100-R](#) [5SF 10-R](#) [5SFP 125-R](#) [5SFP 80-R](#) [5SFP 5-R](#) [5SF 125-R](#) [5SF 1-R](#) [5SFP 4-R](#) [5SFP 500-R](#)  
[5SF 500-R](#) [5SFP 3.15-R](#) [5SFP 2-R](#) [5SFP 2.5-R](#) [5SFP 630-R](#) [5SF 800-R](#) [5SFP 160-R](#) [5SF 630-R](#) [5SFP 400-R](#)  
[5SF 200-R](#) [5SFP 800-R](#) [5SF 160-R](#) [5SF 6.3-R](#) [5SF 5-R](#) [5SF 80-R](#) [5SF 400-R](#) [5SF 4-R](#) [5SFP 100-R](#) [5SFP 1.25-R](#)  
[5SFP 1-R](#) [5SF 2-R](#) [5SF 2.5-R](#) [5SFP 315-R](#) [5SF 250-R](#) [5SFP 250-R](#) [5SF 3.15-R](#) [5SFP 1.6-R](#) [5SF 8-R](#) [5SFP](#)  
[200-R](#) [5SFP 10-R](#) [5SFP 8-R](#) [5SFP 6.3-R](#) [5SF 1.25-R](#) [5SF 1.6-R](#)