









DC POWER JACK

60-0351-0000



DIP SWITCH

60-0352-0000





MODEL NO.	NO. POS	'A' DIM. (MAX)	'B' DIM.
DS-02	2	6.6	2.54
DS-03	3	9.14	5.08
DS-04	4	11.68	7.62
DS-05	5	14.22	10.16
DS-06	6	16.76	12.70
DS-07	7	19.3	15.24
DS-08	8	21.84	17.78
DS-10	10	26.92	22.86
DS-12	12	32.0	27.94

Rating: DC5V 100mA
 Contact Resistance: 50mΩ Max
 Insulation Resistance: DC500V-100MΩ Min
 Withstand Voltage: 500V-1 Minute

PUSH SWITCH

60-0353-0000

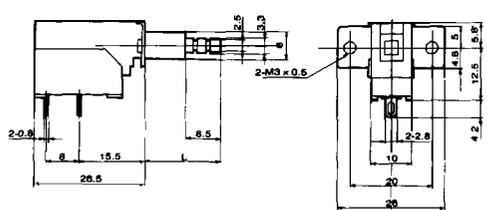

Rating: AC125V 3A
 PUSH-ON-OFF

(Other configurations available upon request.)