

4

3




2

1


THIS DRAWING IS UNPUBLISHED.
RELEASED FOR PUBLICATION
ALL RIGHTS RESERVED.

LOC		DIBT		REVISIONS			
P	LTR	DESCRIPTION	DATE	BY	APD		
J		REVISED PER ECR-11-018063	22DEC11	KH	PD		


- 1 CONTINUOUS STRIP ON REELS
- 2 ACCEPTS #14#10 AWG OR TWO #14's WIRE SIZES, CRIMP WIDTH, .140, F TYPE
- 3 INSULATION RANGE IS .225-.275 DIA OR TWO AT .140 MAX. CRIMP WIDTH, .310, F TYPE
- 4 MATING TAB THK IS .032±.001.

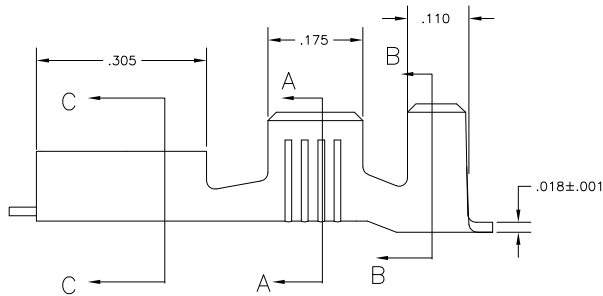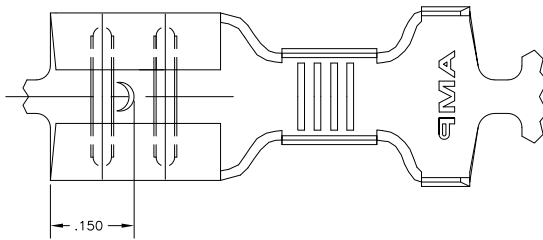

SECTION C-C



SECTION A-A



SECTION B-B

—	60635-3
.000150 MIN SILVER	60635-2
TIN	60635-1
FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DR: J.R. RUTH 27JUN02	TE Connectivity	
DIMENSIONS: INCHES		CHK: P. DESANTIS 28JUN02	NAME: RECEPTACLE, FASTON, .250 SERIES	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		P: P. DESANTIS 28JUN02	APD: 28JUN02	
0 PLC ± .005		APPLICATION SPEC: —		
1 PLC ± .005		SIZE: A2		
2 PLC ± .005		CAGE CODE: 00779		
3 PLC ± .010		DRAWING NO: C-60635		
4 PLC ± .005		RESTRICTED TO: —		
ANGLES: ± .005		WEIGHT: —		
MATERIAL: 4M BRASS		CUSTOMER DRAWING		
FINISH: SEE TABLE		SCALE: 8:1		
		SHEET: 1 of 1		
		REV: J		