


The technical drawing illustrates a bolt assembly in two views:

- Top View:** Shows a hexagonal nut with a central hole. The distance from the center of the hole to the edge of the hexagon is dimensioned as .312 [7.92]. The width across the flats of the hexagon is dimensioned as .437 [11.10] REF. A small circular feature, labeled ".078 [1.98] DIA. HOLE", is located on the right side.
- Side View:** Shows the bolt assembly consisting of a NUT, a LUG, and a BOLT. The total height of the assembly is dimensioned as 1 [38.86] ±.015 [±0.38]. The length of the threaded portion is dimensioned as .750 [19.05]. The length of the unthreaded body is dimensioned as .531 [13.49] ±.015 [±0.38]. The diameter of the bolt shank is dimensioned as .175 [4.44].

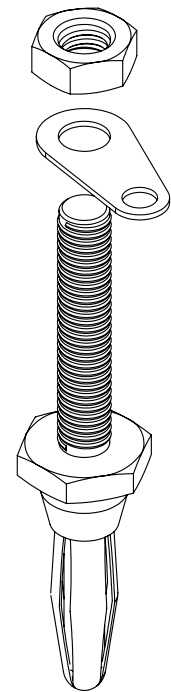

1. SPRING: MAT'L - PHOSPHOR BRONZE
FINISH - NICKEL PLATE

BODY: MAT'L - BRASS
FINISH - NICKEL PLATE

NUT: MAT'L - BRASS
FINISH - ZINC PLATE

LUG: MAT'L - BRASS
FINISH - TIN PLATE

7.08.08	CHANGE AS PER ECN 08-117	D
11.1.07	CHANGE AS PER ECN 07-075	C
1.10.02	CHANGE AS PER ECN 02-002	B
DATE	DESCRIPTION	REV.

KEYSTONE ELECTRONICS CORP. ASTORIA, N.Y. 11105-2017			
PART NAME EXTERNAL THREAD BANANA PLUG			
MATERIAL AS NOTED			
FINISH AS NOTED		DRN BY BOONE	DATE 12.17.82
		APP'D LN	SCALE 2X
TOLERANCES DECIMAL $\pm .005$ [MM] $[\pm 0.15]$ ANGULAR $\pm 1^\circ$ UNLESS OTHERWISE SPECIFIED	CODE C	DWG NO. 6074-2	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Keystone Electronics:](#)

[6074-2](#)