#### Characteristics

The compact 16 mm Series 61 is especially suited for:

- Flush design
- Raised design
- PCB (with adaptor)

The modular design caters to a broad range of applications and combinations.

#### **Functions**

The Series 61 incorporates the following functions:

- Indicator
- Pushbutton
- Illuminated pushbutton
- E-STOP switch
- Stop switch
- Mushroom-head pushbutton
- Keylock switch
- Selector switch
- Buzzer
- Potentiometer

#### Market segments

The EAO Series 61 is especially suited for applications in the segments:

- Public transportation
- Machinery and Automation
- Construction machines and special-purpose vehicles
- Lifting and moving
- Panel building

Please refer to the EAO website to obtain detailed information regarding this series **www.products.eao.com** Configure a product to your exact needs and request a quotation.



Overview	
Flush design	
Indicator	584
Illuminated pushbutton	590
Mushroom-head pushbutton	593
Keylock switch	594
Selector switch	603
Buzzer	607
Potentiometer	608
Raised design	
Indicator	609
Illuminated pushbutton	613
Emergency-stop switch	616
Stop switch	618
Mushroom-head pushbutton	619
Keylock switch	620
Selector switch	629
Accessories	633
Drawings	667
Technical data	669
Marking	674
Application guidelines	677


#### Indicator complete square, IP 65




Product can differ from the current configuration.

## 5.5 max.


Dimensions [mm]



• For front dimension 24 x 24 mm




Mounting cut-outs [mm]

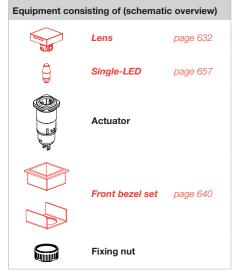


Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the page s shown.

Terminal	Part No.	Wiring	Weight
Indicator actuator complete square			
Solder 2.8 x 0.5 mm	61-0000.02	1	0.006 kg




#### Indicator complete rectangular, IP 65

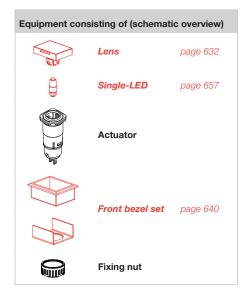

Each Part Number listed below includes all the black components shown in the 3D-drawing.


To obtain a complete unit, please select the red components from the page s shown.



Dimensions [mm]




Product can differ from the current configuration.




For Front dimension 24 x 30 mm

**Additional Information** 

Mounting cut-outs [mm]

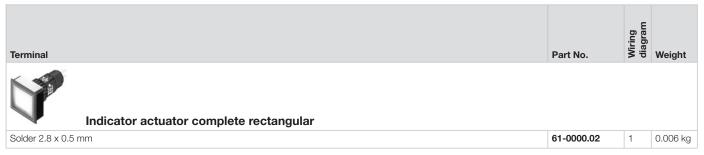




#### Indicator complete round, IP 65




Product can differ from the current configuration.

## 5.5 max.

Dimensions [mm]



• For front dimension Ø 25 mm




Mounting cut-outs [mm]




Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the page s shown.

Terminal	Part No.	Wiring diagram	Weight
Indicator actuator complete round			
Solder 2.8 x 0.5 mm	61-0000.02	1	0.006 kg




#### Indicator square, IP 65

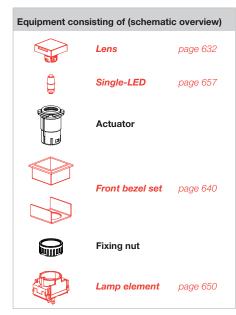

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the page s shown.

61-0009.0



Dimensions [mm]

L1 = Solder terminal 2.8 x 0.5 mm,


L = Solder terminal,

X = Screw terminal,

FL = Flasher



Product can differ from the current configuration.




**Additional Information** For front dimension 24 x 24 mm

Mounting cut-outs [mm]

L1 = Solder terminal 2.8 x 0.5 mm,

L = Solder terminal,

X = Screw terminal

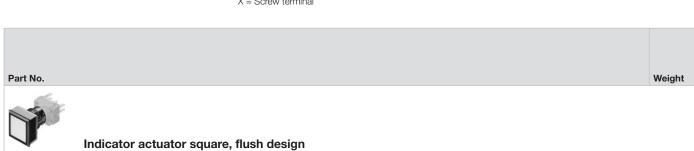


0.005 kg

#### Indicator rectangular, IP 65



Product can differ from the current configuration.



Dimensions [mm]

L1 = Solder terminal 2.8 x 0.5 mm,


L = Solder terminal,

X = Screw terminal,

FL = Flasher

#### **Additional Information**

• For front dimension 24 x 30 mm




Mounting cut-outs [mm]

L1 = Solder terminal 2.8 x 0.5 mm,

L = Solder terminal,

X = Screw terminal

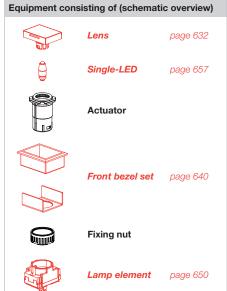

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the page s shown.


## Part No. Weight Indicator actuator rectangular 61-0009.0 0.005 kg

#### Indicator round, IP 65



Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the page s shown.



Dimensions [mm]

L1 = Solder terminal 2.8 x 0.5 mm,


L = Solder terminal,

X = Screw terminal,

FL = Flasher



Product can differ from the current configuration.



Additional InformationFor front dimension Ø 25 mm

Mounting cut-outs [mm]

L1 = Solder terminal 2.8 x 0.5 mm,

L = Solder terminal,


X = Screw terminal



#### Illuminated pushbutton square, IP 65



Product can differ from the current configuration.



Dimensions [mm]

L1 = Solder terminal 2.8 x 0.5 mm,


SA = Snap-action switching element,

SM = Slow-make switching element,


X = Screw terminal

#### **Additional Information**

• For front dimension 24 x 24 mm




Mounting cut-outs [mm] L1 = Solder terminal 2.8 x 0.5 mm, X = Screw terminal

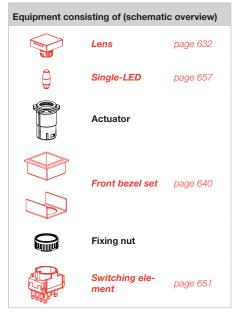


Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the page s shown.

Product attribute	Switching action	Part No.	Wiring	Weight
Illuminated musikhuttan actuates				
Illuminated pushbutton actuator	square			
Illuminated pushbutton actuator	square	61-1100.	<b>0</b> 1	0.005 kg
Illuminated pushbutton actuator	•	61-1100. 61-1200.		0.005 kg




#### Illuminated pushbutton rectangular, IP 65

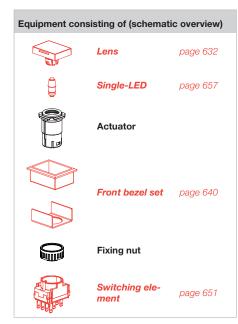

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the page s shown.



Dimensions [mm]

L1 = Solder terminal 2.8 x 0.5 mm,


SA = Snap-action switching element,

SM = Slow-make switching element,

X = Screw terminal



Product can differ from the current configuration.




Mounting cut-outs [mm] L1 = Solder terminal 2.8 x 0.5 mm, X = Screw terminal

#### **Additional Information**

For front dimension 24 x 30 mm


Product attribute	Switching action	Part No.	Wiring	Weight
Illuminated pushbutton actuate	or rectangular			
	В	61-1100.0	1	0.005 kg
	С	61-1200.0	2	0.005 kg
B-C convertible from momentary to maintained action	B - C	61-1300.0	1	0.005 kg



#### Illuminated pushbutton round, IP 65




Product can differ from the current configuration.



Dimensions [mm] L1 = Solder terminal 2.8 x 0.5 mm, SA = Snap-action switching element, SM = Slow-make switching element, X = Screw terminal

#### **Additional Information**

• For front dimension Ø 25 mm



Mounting cut-outs [mm] L1 = Solder terminal 2.8 x 0.5 mm, X = Screw terminal




Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the page s shown.

Product attribute	Switching action	Part No.	Wiring	Weight
Illuminated pushbutton actuato	or round			
	В	61-1100.0	1	0.005 kg
	С	61-1200.0	2	0.005 kg
B-C convertible from momentary to maintained action	B - C	61-1300.0	1	0.005 kg




#### Mushroom-head pushbutton, IP 65

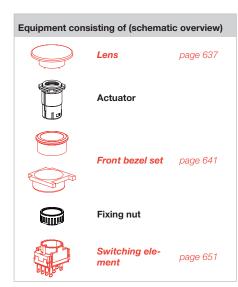

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the page s shown.




Dimensions [mm]

L1 = Solder terminal 2.8 x 0.5 mm, SA = Snap-action switching element, SM = Slow-make switching element,

X = Screw terminal




Product can differ from the current configuration.




Mounting cut-outs [mm] L1 = Solder terminal 2.8 x 0.5 mm, X = Screw terminal


Product attribute	Switching action	Part No.	Wiring	Weight
Mushroom-head pushbutton ad	ctuator, Front dimension Ø 32 mm			
	В	61-1100.0	1	0.005 kg
	С	61-1200.0	2	0.0051
B-C convertible from momentary to maintained action				0.005 kg



#### Keylock switch 2 positions square, IP 65



Product can differ from the current configuration.



Dimensions [mm]

L1 = Solder terminal 2.8 x 0.5 mm,


SA = Snap-action switching element,

SM = Slow-make switching element,


X = Screw terminal

#### **Additional Information**

- For front dimension 24 x 24 mm
- The standard lock: DOM 311
- Two keys are supplied with each key lock switch
- Optional lock numbers on request



Mounting cut-outs [mm] L1 = Solder terminal 2.8 x 0.5 mm, X = Screw terminal

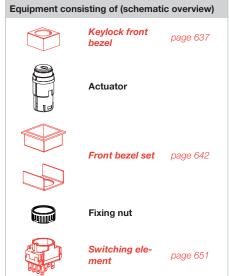

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the page s shown.






Switching positions (A = Rest, B = Momentary, C = Maintained)

Switching action	Switching angle	Key remove	Part No.	Wiring diagram	Weight
Keylock switch a	ctuator 2 positions square				
A - B	B = 42°	A	61-2101.0/D	1	0.065 kg
A - C	C = 90°	Α	61-2201.0/D	2	0.065 kg
		С	61-2203.0/D	2	0.065 kg
		A + C	61-2205.0/D	2	0.065 kg


8-~-	8-~~-
Wiring diagram 1	Wiring diagram 2

#### Keylock switch 2 positions rectangular, IP 65

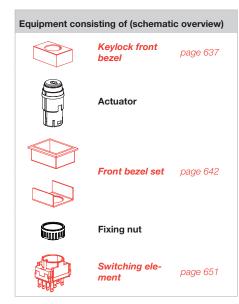

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the page s shown.




Dimensions [mm]

L1 = Solder terminal 2.8 x 0.5 mm, SA = Snap-action switching element, SM = Slow-make switching element,

X = Screw terminal



Product can differ from the current configuration.



Mounting cut-outs [mm] L1 = Solder terminal 2.8 x 0.5 mm, X = Screw terminal


#### **Additional Information**

- For front dimension 24 x 30 mm
- The standard lock: DOM 311
- Two keys are supplied with each key lock switch
- Optional lock numbers on request

A A A

Switching positions (A = Rest, B = Momentary, C = Maintained)


Switching action	Switching angle	Key remove	Part No.	Wiring diagram	Weight
	itch actuator 2 positions rect	angular	61-2101,0/D	1	0.065 kg
A - C	C = 90°	A	61-2201.0/D	2	0.065 kg
		С	61-2203.0/D	2	0.065 kg
		A + C	61-2205.0/D	2	0.065 kg

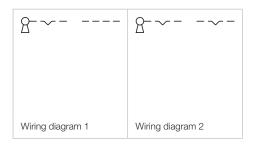

#### Keylock switch actuator 2 positions round, IP 65



Product can differ from the current configuration.




Dimensions [mm] L1 = Solder terminal 2.8 x 0.5 mm, SA = Snap-action switching element,

SM = Slow-make switching element, X = Screw terminal

#### **Additional Information**

- For front dimension 24 x 24 mm
- The standard lock: DOM 311
- Two keys are supplied with each key lock switch
- Optional lock numbers on request



Mounting cut-outs [mm] L1 = Solder terminal 2.8 x 0.5 mm, X = Screw terminal



Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the page s shown.






Switching positions (A = Rest, B = Momentary, C = Maintained)

Switching action	Switching angle	Key remove	Part No.	Wiring diagram	Weight
	ctuator 2 positions round		C1 0101 0/D	-	0.005 1
A - B	B = 42°	A	61-2101.0/D	1	0.065 kg
A - C	C = 90°	A	61-2201.0/D	2	0.065 kg
		С	61-2203.0/D	2	0.065 kg
		A + C	61-2205.0/D	2	0.065 kg


8-~-	8-~~-
Wiring diagram 1	Wiring diagram 2

#### Keylock switch 3 positions square, IP 65

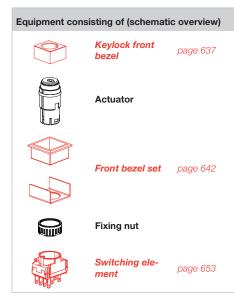

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the page s shown.




Dimensions [mm]

L1 = Solder terminal 2.8 x 0.5 mm, SA = Snap-action switching element, SM = Slow-make switching element,

X = Screw terminal



Product can differ from the current configuration.



Mounting cut-outs [mm] L1 = Solder terminal 2.8 x 0.5 mm, X = Screw terminal

#### **Additional Information**

- For front dimension 24 x 24 mm
- The standard lock: DOM 311
- Two keys are supplied with each key lock switch
- Optional lock numbers on request



Switching positions (A = Rest, B = Momentary, C = Maintained)

Switching action	Switching angle	Key remove	Part No.	Wiring	Weight
Keylock	switch actuator 3 positions squ	are			
B - A - B	B = 42° / 42°	A	61-2501.0/D	1	0.065 kg
C - A - B	C = 90°, B = 42°	A	61-2801.0/D	2	0.065 kg
		С	61-2802.0/D	2	0.065 kg
		C + A	61-2804.0/D	2	0.065 kg
B - A - C	B = 42°, C = 90°	A	61-2701.0/D	3	0.065 kg
		A + C	61-2705.0/D	3	0.065 kg
C - A - C	C = 90° / 90°	A	61-2601.0/D	4	0.065 kg
		C	61-2602.0/D	4	0.065 kg
		C	61-2603.0/D	4	0.065 kg
		C + A	61-2604.0/D	4	0.065 kg
		A+C	61-2605.0/D	4	0.065 kg
		C+C	61-2606.0/D	4	0.065 kg


8	8-~~-	8~-	8
Wiring diagram 1	Wiring diagram 2	Wiring diagram 3	Wiring diagram 4

#### Keylock switch 3 positions rectangular, IP 65



Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the page s shown.




Dimensions [mm]

L1 = Solder terminal 2.8 x 0.5 mm, SA = Snap-action switching element, SM = Slow-make switching element,

X = Screw terminal



Product can differ from the current configuration.



Mounting cut-outs [mm] L1 = Solder terminal 2.8 x 0.5 mm, X = Screw terminal

#### **Additional Information**

- For front dimension 24 x 30 mm
- The standard lock: DOM 311
- Two keys are supplied with each key lock switch
- Optional lock numbers on request



Switching positions (A = Rest, B = Momentary, C = Maintained)

Switching action	Switching angle	Key remove	Part No.	Wiring diagram	Weight
Keylock	switch actuator 3 positions rect	angular			
B - A - B	B = 42° / 42°	A	61-2501.0/D	1	0.065 kg
C - A - B	C = 90°, B = 42°	A	61-2801.0/D	2	0.065 kg
		С	61-2802.0/D	2	0.065 kg
		C + A	61-2804.0/D	2	0.065 kg
B - A - C	B = 42°, C = 90°	A	61-2701.0/D	3	0.065 kg
		A + C	61-2705.0/D	3	0.065 kg
C - A - C	C = 90° / 90°	А	61-2601.0/D	4	0.065 kg
		C	61-2602.0/D	4	0.065 kg
		C	61-2603.0/D	4	0.065 kg
		C + A	61-2604.0/D	4	0.065 kg
		A+C	61-2605.0/D	4	0.065 kg
		C+C	61-2606.0/D	4	0.065 kg


8	8	8	8
Wiring diagram 1	Wiring diagram 2	Wiring diagram 3	Wiring diagram 4

#### Keylock switch 3 positions round, IP 65



Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the page s shown.




Dimensions [mm]

L1 = Solder terminal 2.8 x 0.5 mm, SA = Snap-action switching element, SM = Slow-make switching element,

X = Screw terminal



Product can differ from the current configuration.



Mounting cut-outs [mm] L1 = Solder terminal 2.8 x 0.5 mm, X = Screw terminal

#### **Additional Information**

- For front dimension Ø 25 mm
- The standard lock: DOM 311
- Two keys are supplied with each key lock switch
- Optional lock numbers on request




Switching positions (A = Rest, B = Momentary, C = Maintained)

Switching action	Switching angle	Key remove	Part No.	Wiring	Weight
	switch actuator 3 positions rou	nd			
B - A - B	B = 42° / 42°	Α	61-2501.0/D	1	0.065 kg
C - A - B	C = 90°, B = 42°	A	61-2801.0/D	2	0.065 kg
		С	61-2802.0/D	2	0.065 kg
		C + A	61-2804.0/D	2	0.065 kg
B - A - C	B = 42°, C = 90°	A	61-2701.0/D	3	0.065 kg
		A + C	61-2705.0/D	3	0.065 kg
C - A - C	C = 90° / 90°	Α	61-2601.0/D	4	0.065 kg
		C	61-2602.0/D	4	0.065 kg
		C	61-2603.0/D	4	0.065 kg
		C + A	61-2604.0/D	4	0.065 kg
		A + C	61-2605.0/D	4	0.065 kg
		C + C	61-2606.0/D	4	0.065 kg
		C + A + C	61-2607.0/D	4	0.065 kg


8	8	8~-	8
Wiring diagram 1	Wiring diagram 2	Wiring diagram 3	Wiring diagram 4

#### Selector switch 2 positions square, IP 65

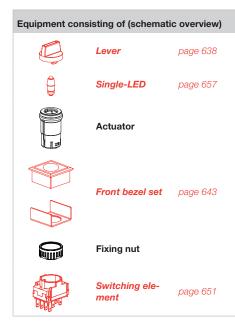

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the page s shown.




Dimensions [mm]

L1 = Solder terminal 2.8 x 0.5 mm, SA = Snap-action switching element, SM = Slow-make switching element,

X = Screw terminal



Product can differ from the current configuration.



Mounting cut-outs [mm] L1 = Solder terminal 2.8 x 0.5 mm, X = Screw terminal


#### **Additional Information**

- For front dimension 24 x 24 mm
- Illuminative



Switching positions (A = Rest, B = Momentary, C = Maintained)


Switching action	Switching angle	Part No.	Wiring diagram	/eight
Selector switch actuator	· 2 positions square			
A - B	B = 42°	61-4110.0	1 0.0	.006 kg
A - C	C = 90°	61-4210.0	2 0.0	.006 kg

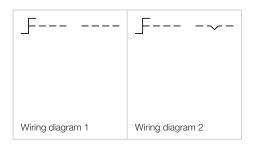

#### Selector switch 2 positions round, IP 65



Product can differ from the current configuration.



Dimensions [mm]

L1 = Solder terminal 2.8 x 0.5 mm,


SA = Snap-action switching element,

SM = Slow-make switching element,


X = Screw terminal

#### **Additional Information**

- For front dimension Ø 25 mm
- Illuminative



Mounting cut-outs [mm] L1 = Solder terminal 2.8 x 0.5 mm, X = Screw terminal

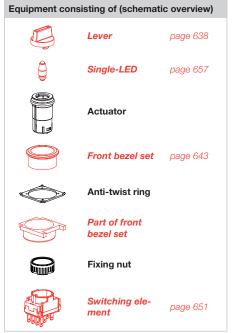

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the page s shown.






Switching positions (A = Rest, B = Momentary, C = Maintained)

Switching action	Switching angle	Part No.	Wiring diagram	Weight
Selector switch actuator 2 posit	ions round			
A - B	B = 42°	61-4110.0	1	0.006 kg
A - C	C = 90°	61-4210.0	2	0.006 kg


F	F~-
Wiring diagram 1	Wiring diagram 2

#### Selector switch 3 positions square, IP 65

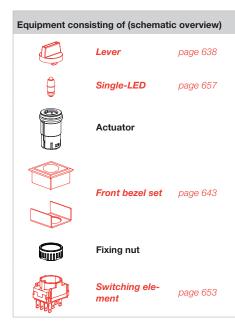

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the page s shown.




Dimensions [mm]

L1 = Solder terminal 2.8 x 0.5 mm, SA = Snap-action switching element, SM = Slow-make switching element,

X = Screw terminal



Product can differ from the current configuration.



Mounting cut-outs [mm] L1 = Solder terminal 2.8 x 0.5 mm, X = Screw terminal

#### **Additional Information**

- For front dimension 24 x 24 mm
- Illuminative



Switching positions (A = Rest, B = Momentary, C = Maintained)


Switching action	Switching angle	Part No.	Wiring diagram	Weight
Selector switch actuator 3 positi	ons square			
5 4 5	B = 42° / 42°	61-4510.0		
B - A - B	$B = 42^{\circ} / 42^{\circ}$	01-4510.0	1	0.006 kg
C-A-B	C = 90°, B = 42°	61-4810.0	2	0.006 kg 0.006 kg
			2	

F~-	F~~-	F~-	F~~-
Wiring diagram 1	Wiring diagram 2	Wiring diagram 3	Wiring diagram 4

#### Selector switch 3 positions round, IP 65



Product can differ from the current configuration.




Dimensions [mm] L1 = Solder terminal 2.8 x 0.5 mm, SA = Snap-action switching element,

SM = Slow-make switching element, X = Screw terminal

#### **Additional Information**

- For front dimension Ø 25 mm
- Illuminative



Mounting cut-outs [mm] L1 = Solder terminal 2.8 x 0.5 mm, X = Screw terminal



Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the page s shown.




Switching positions (A = Rest, B = Momentary, C = Maintained)


Switching action	Switching angle	Builing Part No.	weight Weight
Selector switch 3	positions round B = 42° / 42°	<b>61-4510.0</b> 1	0.006 kg
C - A - B	C = 90°, B = 42°	<b>61-4810.0</b> 2	0.006 kg
B - A - C	B = 42°, C = 90°	<b>61-4710.0</b> 3	0.006 kg
C - A - C	C = 90° / 90°	<b>61-4610.0</b> 4	0.006 kg

F~-	F~~-	J	F~~-
Wiring diagram 1	Wiring diagram 2	Wiring diagram 3	Wiring diagram 4

#### Buzzer




Each Part Number listed below includes all the black components shown in the 3D-drawing.



Dimensions [mm] P = Plug-in terminal 2.8 x 0.5 mm



Product can differ from the current configuration.




Mounting cut-outs [mm]

#### **Additional Information**

Further information see «Technical data»


Front protection	Operating voltage	Front cap	Terminal	Part No.	Wiring	Weight
Bu	zzer, Front dimension	Ø 25 mm				
IP 40	10 26 VDC	Plastic black	Plug-in terminal 2.8 x 0.5 mn	<b>61-7000.02</b>	1	0.015 kg
IP 65	10 26 VDC	Plastic black	Plug-in terminal 2.8 x 0.5 mn	<b>61-7100.02</b>	1	0.015 kg

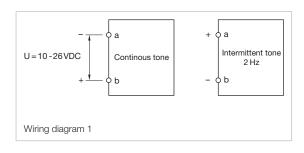


#### Potentiometer, IP 65



Product can differ from the current configuration.




Dimensions [mm]



Each Part Number listed below includes all the black components shown in the 3D-drawing.

#### **Additional Information**


- Resistance 10 kOhms / linear
- Power 1 W
- Slewing 300 °
- Cable length 300 mm




Mounting cut-outs [mm]

Front bezel	Terminal	Part No.	Compo- nent layout	Wiring diagram	Weight
Potention	neter, Front dimension 24 x 24 mm				
Plastic black	Flat ribbon cable	61-4970.13	1	1	0.023 kg
Potention	neter, Front dimension Ø 25 mm				
Plastic black	Flat ribbon cable	61-4970.10	1	1	0.016 kg

The component layouts you will find from page 666




#### Indicator complete, IP 65



Each Part Number listed below includes all the black components shown in the 3D-drawing.


To obtain a complete unit, please select the red components from the page s shown.



Dimensions [mm]




Product can differ from the current configuration.




Mounting cut-outs [mm]

#### Additional Information

Actuator housing plastic black

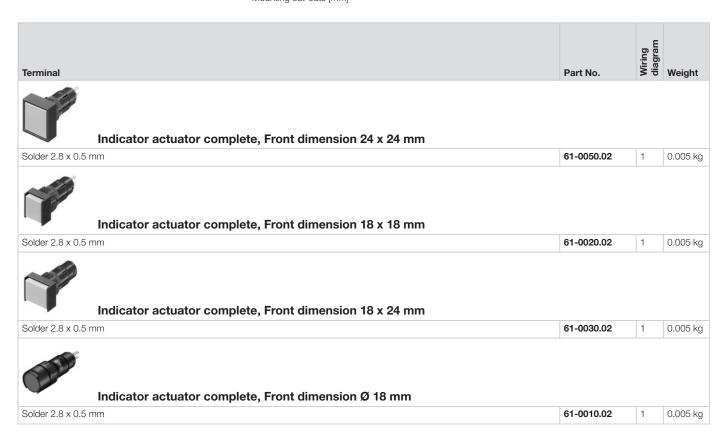



## 61 Raised design

#### Indicator complete Ø 24 mm, IP 65




Product can differ from the current configuration.

**Additional Information** 


Actuator housing plastic black

## 8 max.

Dimensions [mm]





Mounting cut-outs [mm]




Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the page s shown.

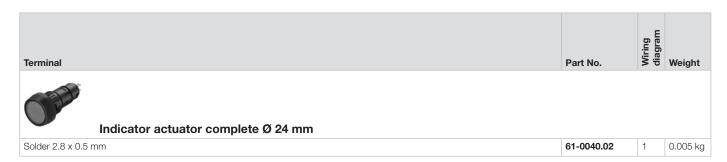




#### Indicator, IP 65



Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the page s shown.



Dimensions [mm]

L1 = Solder terminal 2.8 x 0.5 mm,


L = Solder terminal,

X = Screw terminal,

FL = Flasher



Product can differ from the current configuration.



.01

Additional Information


Actuator housing plastic black

Mounting cut-outs [mm]

L1 = Solder terminal 2.8 x 0.5 mm,

L = Solder terminal,

X = Screw terminal

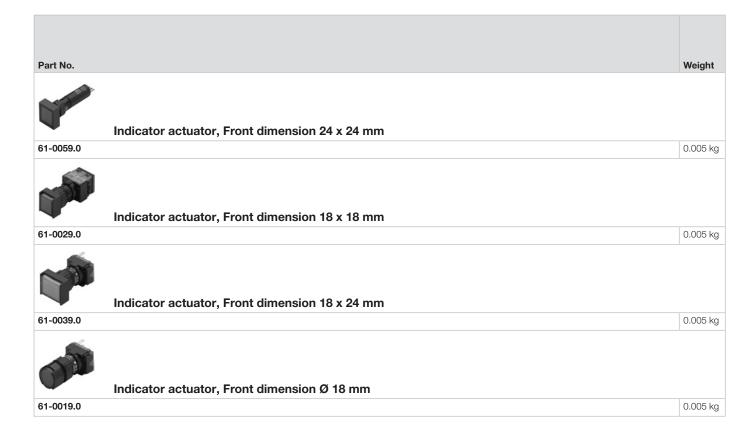


## 61 Raised design

#### Indicator Ø 24 mm, IP 65



Product can differ from the current configuration.



Dimensions [mm]

L1 = Solder terminal 2.8 x 0.5 mm,


L = Solder terminal,

X = Screw terminal,

FL = Flasher

#### **Additional Information**

Actuator housing plastic black




Mounting cut-outs [mm]

L1 = Solder terminal 2.8 x 0.5 mm,

L = Solder terminal,

X = Screw terminal

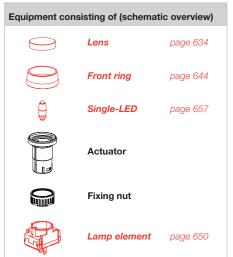


Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the page s shown.

Part No.		Weight
O	Indicator actuator Ø 24 mm	
61-0049.0		0.005 kg


#### Illuminated pushbutton, IP 65



Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the page s shown.

B-C convertible from momentary to maintained action




Dimensions [mm]

L1 = Solder terminal 2.8 x 0.5 mm, SA = Snap-action switching element, SM = Slow-make switching element,

X = Screw terminal



Product can differ from the current configuration.



Mounting cut-outs [mm] L1 = Solder terminal 2.8 x 0.5 mm, X = Screw terminal

#### **Additional Information**

Actuator housing plastic black

Product attribute	Switching action	Part No.	Wiring	Weight
Illuminated pushbutton actua	itor, Front dimension 24 x 24 mm			
	В	61-1150.0	1	0.005 k
	С	61-1250.0	2	0.005 k
	C	01 120010	-	0.0001
3-C convertible from momentary to maintained action	B-C	61-1350.0	1	
3-C convertible from momentary to maintained action  Illuminated pushbutton actua				
	B - C			0.005 k
	B-C	61-1350.0	1	0.005 k

С

B - C

2

61-1230.0

61-1330.0

0.005 kg


0.005 kg

## 61 Raised design

Product attribute	Switching action	Part No.	Wiring diagram	Weight
Illuminated pushbutton actuat	or, Front dimension Ø 18 mm			
	В	61-1110.0	1	0.005 kg
	С	61-1210.0	2	0.005 kg
B-C convertible from momentary to maintained action	B - C	61-1310.0	1	0.005 kg


E	E~-
Wiring diagram 1	Wiring diagram 2

#### Illuminated pushbutton Ø 24 mm, IP 65

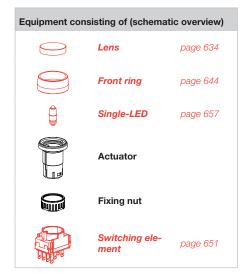

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the page s shown.




Dimensions [mm]

L1 = Solder terminal 2.8 x 0.5 mm, SA = Snap-action switching element, SM = Slow-make switching element,

X = Screw terminal



Product can differ from the current configuration.




#### Additional Information

Actuator housing plastic black

Mounting cut-outs [mm] L1 = Solder terminal 2.8 x 0.5 mm, X = Screw terminal


Switching action	Part No.	Wiring diagram	Weight
Indicator actuator Ø 24 mm	61-1140.0	1	0.005 kg
С	61-1240.0	2	0.005 kg



#### Emergency-stop switch, foolproof EN IEC 60947-5-5, IP 65



Product can differ from the current configuration.



 $\begin{array}{l} \mbox{Dimensions [mm]} \\ \mbox{L1 = Solder terminal 2.8 x 0.5 mm,} \\ \mbox{X = Screw terminal} \end{array}$ 


# Actuator Fixing nut Switching element page 655

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the page s shown.


#### **Additional Information**

- Lens plastic red
- Application as per DIN EN ISO 13850 and EN 60204-1
- The standard lock: KABA 1001
- Two keys are supplied with each key lock switch
- Optional lock numbers on request



Mounting cut-outs [mm]

Product attribute	Marking	Switching action	Part No.	Wiring diagram	Weight
Emergency-stop switch actuator, foolproof El	N IEC 60947-5-5, Fro	nt dimension Ø	27 mm		
Position indication ring black, twist to unlock clockwise	Arrows	С	61-3440.4/1	1	0.02 kg
Emergency-stop switch actuator, foolproof El		ont dimension Ø	27 mm	1	0.02 kg
	N IEC 60947-5-5, Fro			1	0.02 kç
Position indication ring black, twist to unlock clockwise  Emergency-stop switch actuator, foolproof El	Stop + Arrows	С	61-3440.4/2	1	0.02 kg
Position indication ring black, twist to unlock clockwise	N IEC 60947-5-5, Fro	ont dimension Ø	61-3440.4/2 27 mm 61-3440.4/5	1	

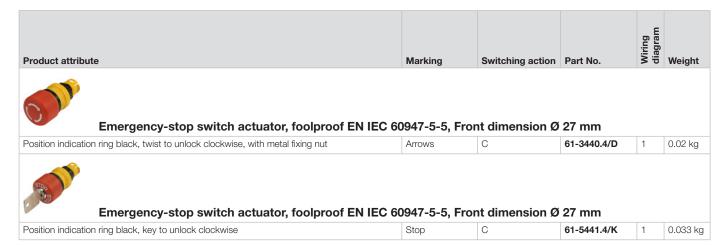

Switching action: C = Maintain




Wiring diagram 1


## Stop switch foolproof, IP 65



Product can differ from the current configuration.



Dimensions [mm] L1 = Solder terminal 2.8 x 0.5 mm, X = Screw terminal




Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the page s shown.

#### **Additional Information**


- The standard lock: KABA 1001
- Two keys are supplied with each key lock switch
- Optional lock numbers on request




Mounting cut-outs [mm]

Product attribute	Lens	Marking	Switching action	Part No.	Wiring diagram	Weight	
Stop switch actuator, foolproof, Front dimension Ø 27 mm							
Position indication ring black, twist to unlock clockwise  Stop switch actuator, foolproo	Plastic grey  f, Front dimensio	n Ø 27 mm	С	61-3440.4/8	1	0.02 kg	
Position indication ring black, key to unlock clockwise	Plastic black		С	61-5441.0/KA	1	0.033 kg	

Switching action: C = Maintain




## Mushroom-head pushbutton, IP 65



Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the page s shown.




Dimensions [mm]

L1 = Solder terminal 2.8 x 0.5 mm, SA = Snap-action switching element, SM = Slow-make switching element,

X = Screw terminal



Product can differ from the current configuration.




Mounting cut-outs [mm] L1 = Solder terminal 2.8 x 0.5 mm, X = Screw terminal

#### **Additional Information**

For front dimension Ø 32 mm

Switching action	Part No.	Wiring	Weight
Mushroom-head pushbutton actuator			
Mushroom-head pushbutton actuator	61-1140.0	1	0.005 kg


Switching action: B = Momentary, C = Maintain



#### Keylock switch 2 positions square, IP 65



Product can differ from the current configuration.



Dimensions [mm]

L1 = Solder terminal 2.8 x 0.5 mm,


SA = Snap-action switching element,

SM = Slow-make switching element,

X = Screw terminal

#### **Additional Information**

- For front dimensions 24 x 24 mm, 18 x18 mm
- The standard lock: DOM 311
- Two keys are supplied with each key lock switch
- Optional lock numbers on request
- If mounted with anti-twist device, the lug is on the
- Anti-twist ring not needed by using anti-twist de-



Mounting cut-outs [mm] L1 = Solder terminal 2.8 x 0.5 mm, X = Screw terminal



Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the page s shown.





Switching positions (A = Rest, B = Momentary, C = Maintained)

Switching action	Switching angle	Key remove	Part No.	Wiring diagram	Weight
Keylock sw	vitch actuator 2 positions squa	are			
A - B	B = 42°	А	61-2101.0/D	1	0.065 kg
A - C	C = 90°	Α	61-2201.0/D	2	0.065 kg
	С	61-2203.0/D	2		
		O		4	0.065 kg




## Keylock switch 2 positions rectangular, IP 65



Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the page s shown.




Dimensions [mm]

L1 = Solder terminal 2.8 x 0.5 mm, SA = Snap-action switching element, SM = Slow-make switching element,

X = Screw terminal



Product can differ from the current configuration.



Mounting cut-outs [mm] L1 = Solder terminal 2.8 x 0.5 mm, X = Screw terminal


#### **Additional Information**

- For front dimension 18 x 24 mm
- The standard lock: DOM 311
- Two keys are supplied with each key lock switch
- Optional lock numbers on request
- If mounted with anti-twist device, the lug is on the left side
- Anti-twist ring not needed by using anti-twist device



Switching positions (A = Rest, B = Momentary, C = Maintained)


Switching action	Switching angle	Key remove	Part No.	Wiring diagram	Weight		
Keylock switch actuator 2 positions rectangular							
A - B	B = 42°	А	61-2101.0/D	1	0.065 kg		
A - C	C = 90°	А	61-2201.0/D	2	0.065 kg		
		С	61-2203.0/D	2	0.0051		
					0.065 kg		

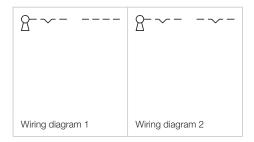

#### Keylock switch actuator 2 positions round, IP 65



Product can differ from the current configuration.




Dimensions [mm] L1 = Solder terminal 2.8 x 0.5 mm, SA = Snap-action switching element, SM = Slow-make switching element,



#### **Additional Information**

- For front dimension Ø 18 mm
- The standard lock: DOM 311
- Two keys are supplied with each key lock switch
- Optional lock numbers on request
- If mounted with anti-twist device, the lug is on the left side
- Anti-twist ring not needed by using anti-twist device



Mounting cut-outs [mm] L1 = Solder terminal 2.8 x 0.5 mm, X = Screw terminal



Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the page s shown.






Switching positions (A = Rest, B = Momentary, C = Maintained)

Switching action	Switching positions	Switching angle	Key remove	Part No.	Wiring diagram	Weight
Keylock switch actuator 2 positions round						
A - B	A = Rest, C = Momentary	B = 42°	А	61-2101.0/D	1	0.065 kg
A - C	A = Rest, C = Maintain	C = 90°	А	61-2201.0/D	2	0.065 kg
			С	61-2203.0/D	2	0.065 kg
			A+C	61-2205.0/D	2	0.065 kg


8-~-	8-~~-
Wiring diagram 1	Wiring diagram 2

#### Keylock switch 3 positions square, IP 65

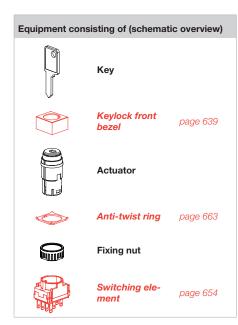

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the page s shown.




Dimensions [mm]

L1 = Solder terminal 2.8 x 0.5 mm, SA = Snap-action switching element, SM = Slow-make switching element,

X = Screw terminal




Product can differ from the current configuration.



Mounting cut-outs [mm] L1 = Solder terminal 2.8 x 0.5 mm, X = Screw terminal

#### **Additional Information**

- For front dimensions 24 x 24 mm, 18 x18 mm
- The standard lock: DOM 311
- Two keys are supplied with each key lock switch
- Optional lock numbers on request
- If mounted with anti-twist device, the lug is on the left side
- Anti-twist ring not needed by using anti-twist device



Switching positions (A = Rest, B = Momentary, C = Maintained)

Switching action	Switching angle	Key remove	Part No.	Wiring	Weight
	switch actuator 3 positions squ	are			
B - A - B	B = 42° / 42°	A	61-2501.0/D	1	0.065 kg
C - A - B	B = 42°, C = 90°	A	61-2801.0/D	2	0.065 kg
		С	61-2802.0/D	2	0.065 kg
		C + A	61-2804.0/D	2	0.065 kg
B - A - C	C = 90°, B = 42°	A	61-2701.0/D	3	0.065 kg
		A + C	61-2705.0/D	3	0.065 kg
C - A - C	C = 90° / 90°	A	61-2601.0/D	4	0.065 kg
		C	61-2602.0/D	4	0.065 kg
		C	61-2603.0/D	4	0.065 kg
		C + A	61-2604.0/D	4	0.065 kg
		A+C	61-2605.0/D	4	0.065 kg
		C+C	61-2606.0/D	4	0.065 kg
		C + A + C	61-2607.0/D	4	0.065 kg


8	8~-	8	8
Wiring diagram 1	Wiring diagram 2	Wiring diagram 3	Wiring diagram 4

## Keylock switch 3 positions rectangular, IP 65



Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the page s shown.




Dimensions [mm]

L1 = Solder terminal 2.8 x 0.5 mm, SA = Snap-action switching element, SM = Slow-make switching element,

X = Screw terminal




Product can differ from the current configuration.



Mounting cut-outs [mm] L1 = Solder terminal 2.8 x 0.5 mm, X = Screw terminal

#### **Additional Information**

- For front dimension 18 x 24 mm
- The standard lock: DOM 311
- Two keys are supplied with each key lock switch
- Optional lock numbers on request
- If mounted with anti-twist device, the lug is on the left side
- Anti-twist ring not needed by using anti-twist device



Switching positions (A = Rest, B = Momentary, C = Maintained)

Switching action	Switching angle	Key remove	Part No.	Weight
Keylock s	switch actuator 3 positions rect	angular		
B - A - B	B = 42° / 42°	А	<b>61-2501.0/D</b> 1	0.065 kg
C - A - B	B = 42°, C = 90°	Α	<b>61-2801.0/D</b> 2	0.065 kg
		С	<b>61-2802.0/D</b> 2	0.065 kg
		C + A	<b>61-2804.0/D</b> 2	0.065 kg
B - A - C	C = 90°, B = 42°	A	<b>61-2701.0/D</b> 3	0.065 kg
		A + C	<b>61-2705.0/D</b> 3	0.065 kg
C - A - C	C = 90° / 90°	Α	<b>61-2601.0/D</b> 4	0.065 kg
		C	<b>61-2602.0/D</b> 4	0.065 kg
		C	<b>61-2603.0/D</b> 4	0.065 kg
		C + A	<b>61-2604.0/D</b> 4	0.065 kg
		A + C	<b>61-2605.0/D</b> 4	0.065 kg
		C+C	<b>61-2606.0/D</b> 4	0.065 kg
		C + A + C	<b>61-2607.0/D</b> 4	0.065 kg


8	8~-	8	8
Wiring diagram 1	Wiring diagram 2	Wiring diagram 3	Wiring diagram 4

#### Keylock switch 3 positions round, IP 65



Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the page s shown.




Dimensions [mm]

L1 = Solder terminal 2.8 x 0.5 mm, SA = Snap-action switching element, SM = Slow-make switching element,

X = Screw terminal



Product can differ from the current configuration.



Mounting cut-outs [mm] L1 = Solder terminal 2.8 x 0.5 mm, X = Screw terminal

#### **Additional Information**

- For front dimension Ø 18 mm
- The standard lock: DOM 311
- Two keys are supplied with each key lock switch
- Optional lock numbers on request
- If mounted with anti-twist device, the lug is on the left side
- Anti-twist ring not needed by using anti-twist device



Switching positions (A = Rest, B = Momentary, C = Maintained)

Switching action	Switching angle	Key remove	Part No.	Gagaga Weight
Keylock s	switch actuator 3 positions rour	nd		
B - A - B	B = 42° / 42°	A	<b>61-2501.0/D</b> 1	0.065 kg
C - A - B	B = 42°, C = 90°	А	<b>61-2801.0/D</b> 2	0.065 kg
		С	<b>61-2802.0/D</b> 2	0.065 kg
		C + A	<b>61-2804.0/D</b> 2	0.065 kg
B - A - C	C = 90°, B = 42°	A	<b>61-2701.0/D</b> 3	0.065 kg
		A + C	<b>61-2705.0/D</b> 3	0.065 kg
C - A - C	C = 90° / 90°	A	<b>61-2601.0/D</b> 4	0.065 kg
		C	<b>61-2602.0/D</b> 4	0.065 kg
		C	<b>61-2603.0/D</b> 4	0.065 kg
		C + A	<b>61-2604.0/D</b> 4	0.065 kg
		A + C	<b>61-2605.0/D</b> 4	0.065 kg
		C+C	<b>61-2606.0/D</b> 4	0.065 kg
		C + A + C	<b>61-2607.0/D</b> 4	_


8	8~-	8	8
Wiring diagram 1	Wiring diagram 2	Wiring diagram 3	Wiring diagram 4

## Selector switch 2 positions square, IP 65



Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the page s shown.



Dimensions [mm]


L1 = Solder terminal 2.8 x 0.5 mm, SA = Snap-action switching element,

SM = Slow-make switching element,

X = Screw terminal



Product can differ from the current configuration.



Mounting cut-outs [mm] L1 = Solder terminal 2.8 x 0.5 mm, X = Screw terminal


#### **Additional Information**

- For front dimensions 26 x 26 mm, 24 x 24 mm
- Illuminative
- If mounted with anti-twist device, the lug is on the left side
- Anti-twist ring not needed by using anti-twist device



Switching positions (A = Rest, B = Momentary, C = Maintained)


Switching action	Switching angle	Part No.	Wiring diagram Weight
Selector switch actuator	· 2 positions square		
A - B	B = 42°	61-4110.0	1 0.006 kg
A - C	C = 90°	61-4210.0	2 0.006 kg

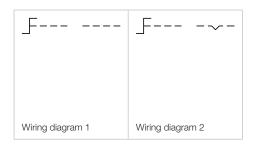

#### Selector switch 2 positions round, IP 65



Product can differ from the current configuration.



Dimensions [mm]

L1 = Solder terminal 2.8 x 0.5 mm,


SA = Snap-action switching element,

SM = Slow-make switching element,


X = Screw terminal

#### **Additional Information**

- Illuminative
- If mounted with anti-twist device, the lug is on the left side
- Anti-twist ring not needed by using anti-twist device.



Mounting cut-outs [mm] L1 = Solder terminal 2.8 x 0.5 mm, X = Screw terminal

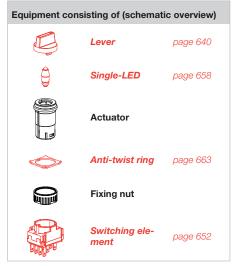

Each Part Number listed below includes all the black components shown in the 3D-drawing.


To obtain a complete unit, please select the red components from the page s shown.






Switching positions (A = Rest, B = Momentary, C = Maintained)

Switching action	Switching angle	Part No.	Wiring diagram	Weight
Selector switch actuator 2 position	ons round, Front dimension Ø 18 mm			
A - B	B = 42°	61-4110.0	1	0.006 kg
A - C	C = 90°	61-4210.0	2	0.006 kg

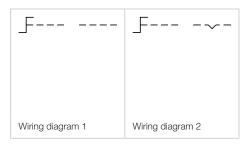


## Selector switch 3 positions square, IP 65

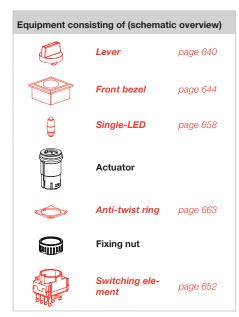

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the page s shown.




Dimensions [mm]

L1 = Solder terminal 2.8 x 0.5 mm, SA = Snap-action switching element, SM = Slow-make switching element,

X = Screw terminal




Product can differ from the current configuration.



Mounting cut-outs [mm] L1 = Solder terminal 2.8 x 0.5 mm, X = Screw terminal

#### **Additional Information**

- Illuminative
- For front dimensions 26 x 26 mm, 24 x 24 mm
- If mounted with anti-twist device, the lug is on the left side.
- Anti-twist ring not needed by using anti-twist device



Switching positions (A = Rest, B = Momentary, C = Maintained)


Switching action	Switching angle	Part No.	Wiring	Weight
Selector switch ac	ctuator 3 positions square			
B - A - B	B = 42° / 42°	61-4510.0	1	0.006 kg
C - A - B	C = 90°, B = 42°	61-4810.0	2	0.006 kg
B - A - C	B = 42°, C = 90°	61-4710.0	3	
B N O	D = 42 , O = 30	* * * * * * * * * * * * * * * * * * *	3	0.006 kg

F~-	F~~-	J	F~~-
Wiring diagram 1	Wiring diagram 2	Wiring diagram 3	Wiring diagram 4

#### Selector switch 3 positions round, IP 65



Product can differ from the current configuration.




 $\begin{array}{l} \mbox{Dimensions [mm]} \\ \mbox{L1} = \mbox{Solder terminal } 2.8 \times 0.5 \mbox{ mm,} \\ \mbox{SA} = \mbox{Snap-action switching element,} \\ \end{array}$ 


SM = Slow-make switching element, X = Screw terminal

#### **Additional Information**

- Illuminative
- If mounted with anti-twist device, the lug is on the left side
- Anti-twist ring not needed by using anti-twist device



Mounting cut-outs [mm] L1 = Solder terminal 2.8 x 0.5 mm, X = Screw terminal

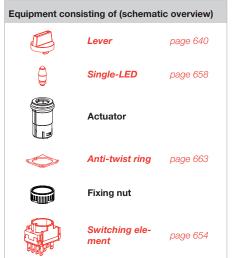

Each Part Number listed below includes all the black components shown in the 3D-drawing.

To obtain a complete unit, please select the red components from the page s shown.



Switching positions (A = Rest, B = Momentary, C = Maintained)

Switching action		Switching angle	Part No.	Wiring	Weight
Sele	ctor switch actuator 3 position	ns round, Front dimension Ø 18 mm			
	oto: ottitoii dotadioi o pooliid				0.0001
B - A - B	otor officer actuator o position	B = 42° / 42°	61-4510.0	1	0.006 kg
			61-4510.0 61-4810.0	1 2	0.006 kg 0.006 kg
B - A - B	on on one of position	B = 42° / 42°		'	-

F~-	F~~-	F~-	F~~-
Wiring diagram 1	Wiring diagram 2	Wiring diagram 3	Wiring diagram 4

## Lens flush design

- Lens surface mat
- Lens profile flat

Product attribute	Dimension	Lens	Part No.	Weight
		12000	1, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2,	11113
	lastic, flush design			
illuminative	18 x 18 mm	smoked transparent	61-9671.1	0.002 kg
		red transparent	61-9671.2	0.002 kg
		orange transparent	61-9671.3	0.002 kg
		yellow transparent	61-9671.4	0.002 kg
		green transparent	61-9671.5	0.002 kg
		blue transparent	61-9671.6	0.002 kg
		colourless transparent	61-9671.7	0.002 kg
non-illuminative	18 x 18 mm	black opaque	61-9771.0	0.002 kg
non-illuminative 18		grey opaque	61-9771.8	0.002 kg
		white translucent	61-9771.9	0.002 kg
illuminative	18 x 24 mm	smoked transparent	61-9681.1	0.002 kg
	lastic, flush design			
ilian ili lative	10 X 24 111111	red transparent	61-9681.2	0.002 kg
		orange transparent	61-9681.3	0.002 kg
		yellow transparent	61-9681.4	0.002 kg
		green transparent	61-9681.5	0.002 kg
		blue transparent	61-9681.6	0.002 kg
		colourless transparent	61-9681.7	0.002 kg
non-illuminative	18 x 24 mm	black opaque	61-9781.0	0.002 kg
		grey opaque	61-9781.8	0.002 kg
		white translucent	61-9781.9	0.002 kg
Lana	olastic, flush design			
illuminative	Ø 19.7 mm	smoked transparent	61-9642.1	0.002 kg
	5 10.7 11111	red transparent	61-9642.2	0.002 kg
		orange transparent	61-9642.3	0.002 kg
		yellow transparent	61-9642.4	0.002 kg
		green transparent	61-9642.5	0.002 kg
		blue transparent	61-9642.6	0.002 kg
		·		
		colourless transparent	61-9642.7	0.002 kg

## Lens plastic with symbol

- Illuminative
- Lens surface mat
- Lens profile flat
- Lenses are suitable for devices with front dimensions Ø 24 mm raised design or Ø 25 mm flush design
- The silvery coat is being applied on the lens (screen print) with an additional protective lacquer.
   Further information see «Technical data»

Dimension	Lens	Symbol	Part No.	Weight
0	Lens plastic with symbol		·	
ð 19.7 mm	red transparent	Ring	61-9643.201	0.002 kg
	orange transparent	Ring	61-9643.301	0.002 kg
	yellow transparent	Ring	61-9643.401	0.002 kg
	green transparent	Ring	61-9643.501	0.002 kg
	blue transparent	Ring	61-9643.601	0.002 kg
	colourless transparent	Ring	61-9643.701	0.002 kg
0	Lens plastic with symbol	, v	61-9643.701	
0 19.7 mm		Ring ON/OFF	61-9643.202	0.002 kg
0 19.7 mm	Lens plastic with symbol	, v		
Ø 19.7 mm	Lens plastic with symbol red transparent	ON/OFF	61-9643.202	0.002 kg

## Lens metal with dot

#### **Additional Information**

- Illuminative
- Lens surface mat
- Lens profile flat
- · Lenses are suitable for devices with front dimensions Ø 24 mm raised design or Ø 25 mm flush
- The colour of anodized aluminium parts can vary due to technical production reasons

Dimension  Lens metal with dot	Lens	Part No.	Weight
Ø 19.7 mm	Aluminium black anodized	61-9841.0A	0.002 kg
	Aluminium red anodized	61-9841.2A	0.002 kg
	Aluminium gold anodized	61-9841.4A	0.002 kg
	Aluminium olive-green anodized	61-9841.5A	0.002 kg
	Aluminium blue anodized	61-9841.6A	0.002 kg
	Aluminium natural anodized	61-9841.8A	0.002 kg

## Lens raised design

- Lens surface mat
- Lens profile flat or concave

Product attribute	Dimension	Lens	Part No.	Weight
Lens pla	astic, raised design			
flat, illuminative	20 x 20 mm	smoked transparent	61-9351.1	0.002 kg
		red transparent	61-9351.2	0.002 kg
		orange transparent	61-9351.3	0.002 kg
		yellow transparent	61-9351.4	0.002 kg
		green transparent	61-9351.5	0.002 kg
		blue transparent	61-9351.6	0.002 kg
		colourless transparent	61-9351.7	0.002 kg
flat, non-illuminative	20 x 20 mm	black opaque	61-9251.0	0.002 kg
		grey opaque	61-9251.8	0.002 kg
		white translucent	61-9251.9	0.002 kg

# **61** Accessories

	<b>Dimension</b> 15.3 x 15.3 mm	Lens smoked transparent red transparent orange transparent	Part No. 61-9321.1	Weight
Product attribute iat, illuminative		smoked transparent red transparent		Weight
flat, illuminative	15.3 x 15.3 mm	red transparent	61-9321.1	
				0.002 kg
		orange transparent	61-9321.2	0.002 kg
		3	61-9321.3	0.002 kg
		yellow transparent	61-9321.4	0.002 kg
		green transparent	61-9321.5	0.002 kg
		blue transparent	61-9321.6	0.002 kg
		colourless transparent	61-9321.7	0.002 kg
lat, non-illuminative	15.3 x 15.3 mm	black opaque	61-9221.0	0.002 kg
		grey opaque	61-9221.8	0.002 kg
		white translucent	61-9221.9	0.002 kg
Lens plast	tic, raised design			
concave, illuminative	15.3 x 15.3 mm	colourless transparent	61-9326.7	0.002 kg
concave, non-illuminative	15.3 x 15.3 mm	black opaque	61-9226.0	0.002 kg
		grey opaque	61-9226.8	0.002 kg
lat, illuminative	15.3 x 21.5 mm	smoked transparent	61-9331.1	0.002 kg
Lens plast	tic, raised design			
iat, iliuminative	15.3 X 21.5 mm		61-9331.1	0.002 kg
				0.002 kg
		red transparent		0.002 kg
		orange transparent	61-9331.3	0.002 kg
		orange transparent yellow transparent	61-9331.3 61-9331.4	0.002 kg 0.002 kg
		orange transparent yellow transparent green transparent	61-9331.3 61-9331.4 61-9331.5	0.002 kg 0.002 kg 0.002 kg
		orange transparent yellow transparent green transparent blue transparent	61-9331.3 61-9331.4 61-9331.5 61-9331.6	0.002 kg 0.002 kg 0.002 kg 0.002 kg
lat non illuminativa	15.2 x 21.5 mm	orange transparent yellow transparent green transparent blue transparent colourless transparent	61-9331.3 61-9331.4 61-9331.5 61-9331.6 61-9331.7	0.002 kg 0.002 kg 0.002 kg 0.002 kg 0.002 kg
flat, non-illuminative	15.3 x 21.5 mm	orange transparent yellow transparent green transparent blue transparent colourless transparent black opaque	61-9331.3 61-9331.4 61-9331.5 61-9331.6 61-9331.7 61-9231.0	0.002 kg 0.002 kg 0.002 kg 0.002 kg 0.002 kg 0.002 kg
ilat, non-illuminative	15.3 x 21.5 mm	orange transparent yellow transparent green transparent blue transparent colourless transparent	61-9331.3 61-9331.4 61-9331.5 61-9331.6 61-9331.7	0.002 kg 0.002 kg 0.002 kg 0.002 kg 0.002 kg
<del>-</del>	tic, raised design	orange transparent yellow transparent green transparent blue transparent colourless transparent black opaque grey opaque white translucent	61-9331.3 61-9331.4 61-9331.5 61-9331.6 61-9331.7 61-9231.0 61-9231.8 61-9231.9	0.002 kg 0.002 kg 0.002 kg 0.002 kg 0.002 kg 0.002 kg 0.002 kg
Lens plast		orange transparent yellow transparent green transparent blue transparent colourless transparent black opaque grey opaque white translucent	61-9331.3 61-9331.4 61-9331.5 61-9331.6 61-9331.7 61-9231.0 61-9231.8 61-9231.9	0.002 kg
Lens plast	tic, raised design	orange transparent yellow transparent green transparent blue transparent colourless transparent black opaque grey opaque white translucent  red transparent yellow transparent	61-9331.3 61-9331.4 61-9331.5 61-9331.7 61-9231.0 61-9231.8 61-9231.9	0.002 kg
	tic, raised design	orange transparent yellow transparent green transparent blue transparent colourless transparent black opaque grey opaque white translucent  red transparent yellow transparent green transparent	61-9331.3 61-9331.4 61-9331.5 61-9331.7 61-9231.0 61-9231.8 61-9231.9 61-9231.9	0.002 kg
Lens plast	tic, raised design	orange transparent yellow transparent green transparent blue transparent colourless transparent black opaque grey opaque white translucent  red transparent yellow transparent	61-9331.3 61-9331.4 61-9331.5 61-9331.7 61-9231.0 61-9231.8 61-9231.9	0.002 kg

Product attribute	Dimension	Lens	Part No.	Weight
flat, illuminative	Ø 15.8 mm	smoked transparent	61-9311.1	0.002 kg
		red transparent	61-9311.2	0.002 kg
		orange transparent	61-9311.3	0.002 kg
		yellow transparent	61-9311.4	0.002 kg
		green transparent	61-9311.5	0.002 kg
		blue transparent	61-9311.6	0.002 kg
		colourless transparent	61-9311.7	0.002 kg
flat, non-illuminative	Ø 15.8 mm	black opaque	61-9211.0	0.002 kg
		white translucent	61-9211.9	0.002 kg

## Lens metal

- Non-illuminative
- Lens surface mat
- Lenses are suitable for devices with front dimensions Ø 24 mm raised design or Ø 25 mm flush design
- The colour of anodized aluminium parts can vary due to technical production reasons

Product attribute	Dimension	Lens	Part No.	Weight
Lens I	metal			
flat	Ø 19.7 mm	Aluminium black anodized	61-9841.0	0.002 kg
		Aluminium red anodized	61-9841.2	0.002 kg
		Aluminium gold anodized	61-9841.4	0.002 kg
		Aluminium olive-green anodized	61-9841.5	0.002 kg
		Aluminium blue anodized	61-9841.6	0.002 kg
		Aluminium natural anodized	61-9841.8	0.002 kg
Lens I		Aluminium block on odina d	C4 0040 C	0.0001:-
convex (domed)	Ø 19.7 mm	Aluminium black anodized	61-9842.0	0.003 kg
		Aluminium red anodized	61-9842.2	0.003 kg
		Aluminium olive-green anodized	61-9842.5	0.003 kg
		Aluminium blue anodized	61-9842.6	0.003 kg
		Aluminium natural anodized	61-9842.8	0.003 kg

## Accessories

## Mushroom-head cap

#### **Additional Information**

Non-illuminative

Mushroom-head cap	Part No.	Weight
Mushroom-head cap, Front dimension Ø 32 mm		
Plastic black	61-9593.0	0.004 kg
Plastic red	61-9593.2	0.004 kg
Plastic yellow	61-9593.4	0.004 kg
Plastic green	61-9593.5	0.004 kg

## Marking plate

#### **Additional Information**

- Can be hot stamped
- Only applicable with lens round Part No. 61-9642.X

Marking plate	Part No.	Weight
Legend plate for lens plastic		
Plastic colourless transparent	61-9707.7	0.001 kg

## Keylock front bezel flush design

Product attribute	Dimension	Material	Colour	Part No.	Weight
Keylock front bezel for	or keylock switch	, flush design			
for device with front dimension 24 x 24 mm	18 x 18 mm	Plastic	black	61-9220.0	0.001 kg
Keylock front bezel fo	or keylock switch	, flush design			
for device with front dimension 24 x 30 mm	18 x 24 mm	Plastic	black	61-9230.0	0.001 kg
	y koylook owitch	fluch docian			,
Keylock front bezel for	or keylock switch	, iluəli desiyli			

## Keylock front bezel raised design

Material		Colour	Part No.	Weight
0	Keylock front bezel for keylock switch, raised d	esign, Front dimension 2	4 x 24 mm	
Plastic		black	61-9250.0	0.001 kg
0	Koylook front hozol for koylook quitab raiged d	locian Eront dimension 1	9 v 19 mm	
Plastic	Keylock front bezel for keylock switch, raised d	lesign, Front dimension 1	8 x 18 mm 61-9220.0	0.001 kg
Plastic	Keylock front bezel for keylock switch, raised d	black	61-9220.0	0.001 kg
		black	61-9220.0	0.001 kg
Plastic Plastic		black lesign, Front dimension 1	61-9220.0 8 x 24 mm 61-9230.0	

## Lever flush design

#### **Additional Information**

With bar and marking dot

Lever illumination	Lever	Bar colour	Part No.	Weight
Lever flush desig	jn			
lluminative	Plastic black	red	61-9028.20	0.001 kg
		yellow	61-9028.40	0.001 kg
		green	61-9028.50	0.001 kg
		blue	61-9028.60	0.001 kg
	Plastic grey	red	61-9029.20	0.001 kg
		orange	61-9029.30	0.001 kg
		yellow	61-9029.40	0.001 kg
		green	61-9029.50	0.001 kg
		blue	61-9029.60	0.001 kg
on-illuminative	Plastic black	black	61-9028.0	0.001 kg
		white	61-9028.9	0.001 kg
	Plastic grey	grey	61-9029.8	0.001 kg
		white	61-9029.9	0.001 kg

## 61 Accessories

## Lever raised design

#### **Additional Information**


With bar and marking dot

Lever illumination  Lever raised design	Lever	Bar colour	Part No.	Weight
illuminative	Plastic black	red	52-928.20	0.001 kg
		orange	52-928.30	0.001 kg
		yellow	52-928.40	0.001 kg
		green	52-928.50	0.001 kg
		blue	52-928.60	0.001 kg
	Plastic grey	red	52-929.20	0.001 kg
		orange	52-929.30	0.001 kg
		yellow	52-929.40	0.001 kg
		green	52-929.50	0.001 kg
		blue	52-929.60	0.001 kg
non-illuminative	Plastic black	black	52-928.0	0.001 kg
		white	52-928.9	0.001 kg
	Plastic grey	grey	52-929.8	0.001 kg
		white	52-929.9	0.001 kg

## Legend frame

#### **Additional Information**

- $\bullet$   $\,$  For devices with front dimension Ø 25 mm, flush design
- The colour of anodized aluminium parts can vary due to technical production reasons



Dimensions [mm]

Dimension	Material	Colour	Mounting type	Part No.	Weight
Legend fra	ame				
30 x 50 x 0.75 mm	Aluminium	black anodized	adhesive	61-9980.0	0.001 kg

## Legend plate

#### **Additional Information**

- For legend frame Part No. 61-9980.0
- The colour of anodized aluminium parts can vary due to technical production reasons

Dimension	Material	Colour	Mounting type	Part No.	Weight
Lege	end plate for legend fra	ıme			
14.5 x 23.5 mm	Aluminium	natural anodized	adhesive	704.968.0	0.001 kg
		black anodized	adhesive	704.968.1	0.001 kg

## Front bezel set pushbutton

- The dimensions of the Mounting cut-outs are shown in the product details
- The colour of anodized aluminium parts can vary due to technical production reasons

Nounting cut-o	out Front bezel	Part No.	Weight
N I	Front bezel set for indicator and illuminated pushbutton, flush design, Front din	ension 24 x 24	ł mm
21 x 21 mm	Plastic black	61-9930.0	0.008 kç
	Plastic silver	61-9930.4	0.008 kg
1 x 27 mm	Front bezel set for indicator and illuminated pushbutton, flush design, Front din	61-9931.0	0.008 kg
!1 x 27 mm	•		
21 x 27 mm	Plastic black	61-9931.0 61-9931.4	0.008 kį
0	Plastic black Plastic silver  Front bezel set for indicator and illuminated pushbutton, flush design, Front din	61-9931.0 61-9931.4 nension Ø 25 m	0.008 kg
	Plastic black Plastic silver  Front bezel set for indicator and illuminated pushbutton, flush design, Front din Aluminium natural anodized	61-9931.0 61-9931.4 nension Ø 25 m 61-9933.0	0.008 kg 0.008 kg
	Plastic black Plastic silver  Front bezel set for indicator and illuminated pushbutton, flush design, Front din Aluminium natural anodized Aluminium black anodized	61-9931.0 61-9931.4 ension Ø 25 m 61-9933.0 61-9933.1	0.008 kg 0.008 kg  mm 0.006 kg
	Plastic black Plastic silver  Front bezel set for indicator and illuminated pushbutton, flush design, Front din Aluminium natural anodized Aluminium black anodized Aluminium red anodized	61-9931.0 61-9931.4 nension Ø 25 m 61-9933.0 61-9933.1 61-9933.2	0.008 kg 0.008 kg 0.006 kg 0.006 kg 0.006 kg
	Plastic black Plastic silver  Front bezel set for indicator and illuminated pushbutton, flush design, Front din Aluminium natural anodized Aluminium black anodized Aluminium red anodized Aluminium gold anodized	61-9931.0 61-9931.4 ension Ø 25 m 61-9933.0 61-9933.1 61-9933.2 61-9933.4	0.008 kg 0.008 kg 0.006 kg 0.006 kg 0.006 kg

## 61 Accessories

## Front bezel set mushroom

- The dimensions of the mounting cut-outs are shown in the product details
- The colour of anodized aluminium parts can vary due to technical production reasons

Di	Manustra	Front board	Doub No.	M-:-/:
imension	Mounting cut-out	Front bezel	Part No.	Weight
Front bezel s	et for mushroom-head pushbutton,	flush desian. Front dimension (	ð 40 mm	
	Ø 22.5 mm	Aluminium natural anodized	61-9934.8	0.013 kg
	et for mushroom-head pushbutton,		61-9933.0	0.006 kg
	Ø 22.5 mm	Aluminium natural anodized		0.006 kg
	Ø 22.5 mm Ø 22.5 mm	Aluminium natural anodized Aluminium black anodized	61-9933.1	0.006 kg
	Ø 22.5 mm Ø 22.5 mm Ø 22.5 mm	Aluminium natural anodized Aluminium black anodized Aluminium red anodized	61-9933.1 61-9933.2	0.006 kg 0.006 kg
	Ø 22.5 mm Ø 22.5 mm	Aluminium natural anodized Aluminium black anodized Aluminium red anodized Aluminium gold anodized	61-9933.1	0.006 kg 0.006 kg 0.006 kg
	Ø 22.5 mm Ø 22.5 mm Ø 22.5 mm	Aluminium natural anodized Aluminium black anodized Aluminium red anodized	61-9933.1 61-9933.2	0.006 kg 0.006 kg
Front bezel s	Ø 22.5 mm Ø 22.5 mm Ø 22.5 mm Ø 22.5 mm	Aluminium natural anodized Aluminium black anodized Aluminium red anodized Aluminium gold anodized	61-9933.1 61-9933.2 61-9933.4	0.006 kg 0.006 kg 0.006 kg

## Front bezel set keylock switch

- The dimensions of the mounting cut-outs are shown in the product details
- For the round front bezel sets the anti-twist ring is part of the sales-package
- The colour of anodized aluminium parts can vary due to technical production reasons

lounting cut-	out Front bezel	Part No.	Weight
	Front bezel set for keylock switch, flush design, Front dimension 24 x 24 mm	1.00000	, <b>g</b>
1 x 21 mm	Plastic black	61-9930.0	0.008 kg
	Plastic silver	61-9930.4	0.008 kg
x 27 mm	Front bezel set for keylock switch, flush design, Front dimension 24 x 30 mm  Plastic black	61-9931.0	0.008 kg
1 x 27 mm		61-9931.0 61-9931.4	0.008 kg
N	Plastic black		0.008 kg
1 x 27 mm	Plastic black Plastic silver  Front bezel set for keylock switch, flush design, Front dimension Ø 25 mm	61-9931.4	0.008 kg
N	Plastic black Plastic silver  Front bezel set for keylock switch, flush design, Front dimension Ø 25 mm  Aluminium natural anodized	61-9932.0	0.008 kg
N	Plastic black Plastic silver  Front bezel set for keylock switch, flush design, Front dimension Ø 25 mm  Aluminium natural anodized Aluminium black anodized	61-9931.4 61-9932.0 61-9932.1	0.006 kg 0.006 kg 0.006 kg
N	Plastic black Plastic silver  Front bezel set for keylock switch, flush design, Front dimension Ø 25 mm  Aluminium natural anodized Aluminium black anodized Aluminium red anodized	61-9932.0 61-9932.1 61-9932.2	0.008 kg  0.006 kg  0.006 kg  0.006 kg
N	Plastic black Plastic silver  Front bezel set for keylock switch, flush design, Front dimension Ø 25 mm  Aluminium natural anodized Aluminium black anodized Aluminium red anodized Aluminium gold anodized	61-9932.0 61-9932.1 61-9932.2 61-9932.4	

## 61 Accessories

## Front bezel set selector switch

#### **Additional Information**

- The dimensions of the mounting cut-outs are shown in the product details
- With the round front bezel sets Ø 25 mm the antitwist ring is part of the sales-package
- The colour of anodized aluminium parts can vary due to technical production reasons

lounting cut-	-out	Front bezel	Part No.	Weight
	Front bezel set for selector switch, flusl	h design, Front dimension 24 x 24 mm	1	
x 21 mm		Plastic black	61-9936.0	0.007 kg
S.		'	<u>'</u>	'
O?	Front bezel set for selector switch, flusl	h design, Front dimension Ø 25 mm		'
22.5 mm	Front bezel set for selector switch, flus	h design, Front dimension Ø 25 mm  Aluminium natural anodized	61-9932.0	0.006 kg
22.5 mm	Front bezel set for selector switch, flusi	<u> </u>	61-9932.0 61-9932.1	0.006 kg
22.5 mm	Front bezel set for selector switch, flusi	Aluminium natural anodized		
22.5 mm	Front bezel set for selector switch, flus	Aluminium natural anodized Aluminium black anodized	61-9932.1	0.006 kg
22.5 mm	Front bezel set for selector switch, flusi	Aluminium natural anodized Aluminium black anodized Aluminium red anodized	61-9932.1 61-9932.2 61-9932.4	0.006 kg 0.006 kg
22.5 mm	Front bezel set for selector switch, flusi	Aluminium natural anodized Aluminium black anodized Aluminium red anodized Aluminium gold anodized	61-9932.1 61-9932.2 61-9932.4	0.006 kg 0.006 kg 0.006 kg

## Front bezel selector switch square

#### **Additional Information**

• The dimensions of the mounting cut-outs are shown in the product details

Dimension		Front bezel	Part No.	Weight
0	Front bezel for selector switch square, raised design			
24 x 24 mm		Plastic black	52-950.0	0.001 kg
26 x 26 mm		Plastic black	52-952.0	0.001 kg

## Front ring

#### **Additional Information**

- For devices with front dimension  $\varnothing$  24 mm, raised design
- The colour of anodized aluminium parts can vary due to technical production reasons

Front ring	Part No.	Weight
Front ring, Front dimension Ø 24 mm		
Aluminium black anodized	61-9600.0	0.003 kg
Aluminium natural anodized	61-9600.1	0.003 kg


## Front protective cap, IP 68

- For flat lense profil only
- When using the front protection cover for push buttons the external sealing in the front bezel set and the silicone bellows in the actuator are to be removed

Product attribute	Material	Colour	Optics	Part No.	Weight
Front protective cap					
for front bezel set 24 x 30 mm, flush design	Silicone	colourless	transparent	61-9927.2	0.001 kg
Front protective cap					
for front bezel set Ø 25 mm, flush design	Silicone	colourless	transparent	84-9103.7	0.001 kg

## Protective cover flush design, IP 65

- The dimensions of the mounting cut-outs are shown in the product details
- Please note that bigger minimum distances are necessary

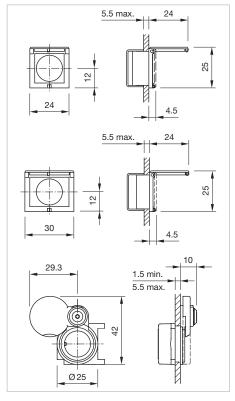


Dimensions [mm]

Product attribute	Mounting cut-out	Material	Optics	Part No.	Weight
Protective cover flush design					
ninged, with means for sealing, for device with front dimension 24 x 24 mm	21 x 21 mm	Plastic	transparent	61-9921.0	0.006 kg
Protective cover flush design					
ninged, with means for sealing, for device with front dimension $4\mathrm{x}30\;\mathrm{mm}$	21 x 27 mm	Plastic	transparent	61-9922.0	0.006 kg
Protective cover flush design		ı		I	
slide by side, with means not for sealing, for device with front dimension Ø 25 mm	Ø 22.5 mm	Plastic	transparent	61-9924.0	0.006 kg

## Protective cover raised design, IP 65

- The dimensions of the mounting cut-outs are shown in the product details
- Please note that bigger minimum distances are necessary

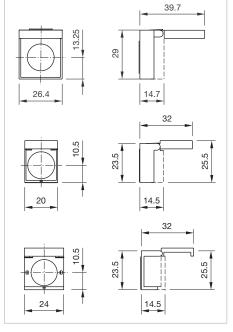

Dimensions [mm]


Product attribute	Mounting cut-out	Material	Optics	Part No.	Weight
Protective cover raised design					
inged, with means not for sealing, for device with front limension 24 x 24 mm	Ø 16 mm	Plastic	transparent	61-9920.0	0.004 kg
Protective cover raised design					
inged, with means for sealing, for device with front dimension 8 x 18 mm	Ø 16 mm	Plastic	transparent	51-920	0.002 kg
Protective cover raised design					

## **61** Accessories

## Blind plug flush design

#### **Additional Information**


 The dimensions of the mounting cut-outs are shown in the product details



Dimensions [mm]

Dimension	Mounting cut-out	Material	Colour	Part No.	Weight
	nd plug flush design	, maconal	05.04.	Tutties	worgin
24 x 24 mm	21 x 21 mm	Plastic	black	61-9451.0	0.006 kg
Bli	nd plug flush design				
24 x 30 mm	21 x 27 mm	Plastic	black	61-9452.0	0.006 kg
Bli	nd plug flush design			·	·

## Blind plug raised design



Mounting cut-outs [mm]

Dimension	Mounting cut-out	Material	Colour	Part No.	Weight
Bli	nd plug raised design				
24 x 24 mm	Ø 16 mm	Plastic	black	61-9450.0	0.003 kg
8 x 18 mm	Ø 16 mm	Plastic	black	51-948.0	0.003 kg
Blit	nd plug raised design				
8 x 24 mm	Ø 16 mm	Plastic	black	51-947.0	0.003 kg
Bli	nd plug raised design			·	·
Ø 18 mm	Ø 16 mm	Plastic	black	51-949.0	0.003 kg

## 61 Accessories

## Master key

#### **Additional Information**

• For standard lock: DOM 311 ... 445

Part No.		Weight
N. A.	Лaster key	
31-989.300		0.006 kg

## Spare key

#### **Additional Information**

Optional lock numbers on requestt

Product attribute	Part No.	Weight
Spare key		
for emergency-stop switch, for standard lock: KABA 1001	14-987.1001	0.006 kg
Spare key		
for key lock switch, for standard lock: DOM 311	31-989.311	0.006 kg

## **EMC** key protection cap

- For standard lock: DOM
- Plastic black


Part No.		Weight
	EMC key protection cap	
31-985.0		0.005 kg

## Rear side

## Lamp element

Terminal		Part N	lo.	Compo- nent layout	Wiring diagram	Weight
	Lamp element					
Screw		61-80	06.01	3	1	0.005 kg
	Lamp element					
Solder 2.8 x 0.5 n	nm	61-80	06.02	2	1	0.005 kg


The component layouts you will find from page 666



## **Diode element**

Diode	Terminal	Part No.	Compo- nent layout	Wiring diagram	Weight				
Diode element									
1	Solder 2.8 x 0.5 mm	61-8101.02	4	1	0.007 kg				
2	Solder 2.8 x 0.5 mm	61-8102.02	5	2	0.008 kg				

The component layouts you will find from page 666



## Flasher element

#### **Additional Information**

- Only for Indicator actuator (without indicator complete)
- Further information see «Technical data»

Operating voltage	Terminal	Part No.	Compo- nent layout	Weight
Flasher element				
12 28 ±10 % VAC/DC	Solder	61-8000.05	6	0.005 kg

The component layouts you will find from page 666


## **Switching element 2 positions**

#### **Additional Information**

 We offer a dismantling tool Part No. 61-9711.0 for dismantling of the switching element

Product attribute	Diode 1N4007	Switching	Switching current	Switching system	Contacts	Contact material	Terminal	Part No.	Compo- nent layout	Wiring diagram	Weight				
	Switc	hing elemer	nt for pu	shbutton an	nd keylock-	and se	elector switch 2 po	ositions							
with lamp	2	250 VAC	5 A	Snap-action switching element	1 NO	Silver	Solder 2.8 x 0.5 mm	61-8212.12	7	1	0.007 kg				
terminal						Gold	Solder 2.8 x 0.5 mm	61-8212.22	7	1	0.007 kg				
		250 VAC	5 A	Snap-action	1 NO	Silver	Solder 2.8 x 0.5 mm	61-8410.12	11	5	0.007 kg				
				switching element		Gold	Solder 2.8 x 0.5 mm	61-8410.22	11	5	0.007 kg				
				O.G.M.G.	2 NO	Silver	Solder 2.8 x 0.5 mm	61-8420.12	14	8	0.007 kg				
						Gold	Solder 2.8 x 0.5 mm	61-8420.22	14	8	0.007 kg				
					3 NO	Silver	Solder 2.8 x 0.5 mm	61-8430.12	16	10	0.007 kg				
					Gold	Solder 2.8 x 0.5 mm	61-8430.22	16	10	0.007 kg					
			1 NC	Silver	Solder 2.8 x 0.5 mm	61-8440.12	8	2	0.007 kg						
							Gold	Solder 2.8 x 0.5 mm	61-8440.22	8	2	0.007 kg			
					2 NC	Silver	Solder 2.8 x 0.5 mm	61-8450.12	12	6	0.007 kg				
								Gold	Solder 2.8 x 0.5 mm	61-8450.22	12	6	0.007 kg		
					3 NC	Silver	Solder 2.8 x 0.5 mm	61-8460.12	15	9	0.007 kg				
						Gold	Solder 2.8 x 0.5 mm	61-8460.22	15	9	0.007 kg				
					1 NC + 1 NO	Silver	Solder 2.8 x 0.5 mm	61-8470.12	9	3	0.007 kg				
					Gold	Solder 2.8 x 0.5 mm	61-8470.22	9	3	0.007 kg					
				2 NC + 1 NO	Silver	Solder 2.8 x 0.5 mm	61-8480.12	13	7	0.007 kg					
										Gold	Solder 2.8 x 0.5 mm	61-8480.22	13	7	0.007 kg
		1 NC	1 NC + 2 NO	Silver	Solder 2.8 x 0.5 mm	61-8490.12	10	4	0.007 kg						
						Gold	Solder 2.8 x 0.5 mm	61-8490.22	10	4	0.007 kg				

attribute	Diode 1N4007	Switching voltage	Switching current	Switching system	Contacts	Contact	Terminal	Part No.	Compo- nent layout	Wiring diagram	Weight
	Switch	ing elemen	t for pu	shbutton ar	nd keylock-	and se	elector switch 2 po	ositions			
vith lamp		250 VAC	5 A	Slow-make	1 NO	Silver	Solder 2.8 x 0.5 mm	61-8610.17	20	5	0.008 kg
erminal				switching element	2 NO	Silver	Solder 2.8 x 0.5 mm	61-8620.17	23	8	0.008 kg
					1 NC	Silver	Solder 2.8 x 0.5 mm	61-8640.17	17	2	0.008 kg
					2 NC	Silver	Solder 2.8 x 0.5 mm	61-8650.17	22	6	0.008 kg
					1 NC + 1 NO	Silver	Solder 2.8 x 0.5 mm	61-8670.17	19	3	0.008 kg
	42 VAC/DC	0.1 A	Slow-make	1 NO	Gold	Solder 2.8 x 0.5 mm	61-8610.37	20	5	0.008 kg	
				switching element	2 NO	Gold	Solder 2.8 x 0.5 mm	61-8620.37	23	8	0.008 kg
					1 NC	Gold	Solder 2.8 x 0.5 mm	61-8640.37	17	2	0.008 kg
					2 NC	Gold	Solder 2.8 x 0.5 mm	61-8650.37	22	6	0.008 kg
					1 NC + 1 NO	Gold	Solder 2.8 x 0.5 mm	61-8670.37	19	3	0.008 kg
th lamp	Switch	ing element	t for pu	shbutton ar Slow-make switching element	nd keylock-	and se	elector switch 2 po	esitions 61-8610.11 61-8640.11	21	5	0.008 kg
thaut laws		250 VAC	5 A	Slow-make	1 NO	Silver	Screw	61-8615.11	26	13	
thout lamp minal		230 VAC	JA	switching	2 NO	Silver	Screw	61-8625.11	28	15	0.008 kg
				element	1 NC	Silver	Screw	61-8645.11	24	11	0.008 kg
					2 NC	Silver	Screw	61-8655.11	27	14	0.008 kg
					1 NC + 1 NO	Silver	Screw	61-8675.11	25	12	0.008 kg

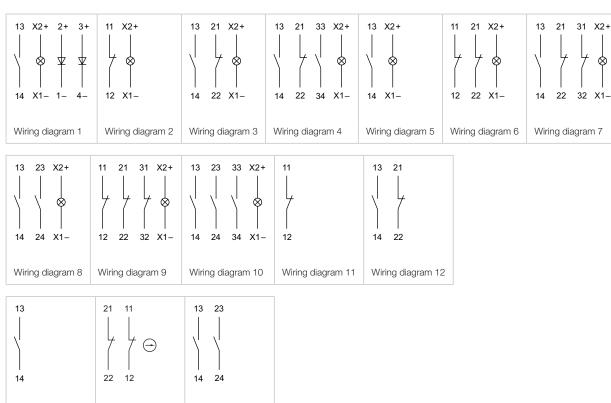

Wiring diagram 13

Wiring diagram 14

Wiring diagram 15


# **Switching element 3 positions**

#### **Additional Information**

 We offer a dismantling tool Part No. 61-9711.0 for dismantling of the switching element

Product attribute	Switching voltage	Switching current	Switching system	Contacts	Contact	Terminal	ArtNr.	Compo- nent layout	Wiring diagram	Gewicht		
with lamp ter-	250 VAC	5 A	Snap-action switching ele- ment	2 NO	Silver	Solder 2.8 x 0.5 mm	61-8520.12	31	3	0.008 kg		
minal					Gold	Solder 2.8 x 0.5 mm	61-8520.22	31	3	0.008 kg		
				2 NC	Silver	Solder 2.8 x 0.5 mm	61-8550.12	30	2	0.008 kg		
					Gold	Solder 2.8 x 0.5 mm	61-8550.22	30	2	0.008 kg		
						1 NC + 1 NO	Gold	Solder 2.8 x 0.5 mm	61-8574.22	29	1	0.008 kg
					Silver	Solder 2.8 x 0.5 mm	61-8574.12	29	1	0.008 kg		
			Slow-make	2 NO	Silver	Solder 2.8 x 0.5 mm	61-8720.17	31	3	0.008 kg		
			switching ele- ment	2 NC	Silver	Solder 2.8 x 0.5 mm	61-8750.17	31	2	0.008 kg		
				1 NC + 1 NO	Silver	Solder 2.8 x 0.5 mm	61-8770.17	32	1	0.008 kg		
	42 VAC/DC	0.1 A	Slow-make	2 NO	Gold	Solder 2.8 x 0.5 mm	61-8720.37	34	3	0.008 kg		
			switching ele- ment	2 NC	Gold	Solder 2.8 x 0.5 mm	61-8750.37	33	2	0.008 kg		
				1 NC + 1 NO	Gold	Solder 2.8 x 0.5 mm	61-8770.37	32	1	0.008 kg		
without lamp	250 VAC	5 A	Slow-make	2 NO	Silver	Screw	61-8725.11	28	6	0.008 kg		
terminal			switching ele- ment	2 NC	Silver	Screw	61-8755.11	27	5	0.008 kg		
				1 NC + 1 NO	Silver	Screw	61-8775.11	25	4	0.008 kg		


Contacts: NC = Normally closed, NO = Normally open The component layouts you will find from page 666

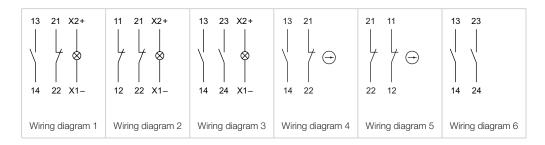

# Switching element E-stop & stop

0.008 kg
0.008 kg
0.008 kg
1 3


Contacts: NC = Normally closed, NO = Normally open The component layouts you will find from page 666

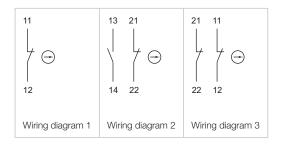

# Switching element stop switch

Switching voltage	Switching current	Switching system	Contacts	Contact material	Terminal	Part No.	Compo- nent layout	Wiring diagram	Weight
Switching element for stop switch, foolproof									
	Switching e	lement for stop	o switch, foolp	proof					
42 VAC/DC	Switching e	Slow-make swit-	o switch, foolp	<b>proof</b> Gold	Solder 2.8 x 0.5 mm	61-8745.37	35	1	0.008 kg
42 VAC/DC		_			Solder 2.8 x 0.5 mm Solder 2.8 x 0.5 mm	61-8745.37 61-8755.37	35 37	1 3	0.008 kg 0.008 kg

Contacts: NC = Normally closed, NO = Normally open The component layouts you will find from page 666

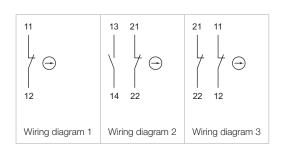

# PCB plug-in base

Product attribute	Dimension	Pins	Terminal	Part No.	Compo- nent layout	Weight
PCB plug-in base						
for indicator complete	Ø 13.1 x 9.8 mm	axial	PCB	61-9820.1	40	0.002 kg
PCB plug-in base						
for snap-action switching element, indicator- and diode element	23 x 15 x 9.4 mm	axial	PCB	61-9821.1	38	0.003 kg
PCB plug-in base						
for slow-make switching element	23.6 x 17.7 x 10.9 mm	axial	PCB	61-9823	39	0.002 kg

The component layouts you will find from page 666

# **Multi-plug housing**

#### **Additional Information**

For snap-action switching element, max. 6 connections possible

Part No.		Weight
	Multi-plug housing	
61-9830		0.002 kg

# Flat receptacle

Product attribute	Part No.	Weight
Froduct attribute	r ait No.	Weight
Flat receptacle		
2.8 x 0.5 mm plug-in terminal	31-946	0.001 kg
Flat receptacle		
· idt i cooptaoic		

# Insulation sleeve

Product attribute	Part No.	Weight
Insulation sleeve		
for flat receptacle 2.8 mm	31-929	0.001 kg

# Terminal cover


Product attribute	Part No.	Weight
Terminal cover	64 0020 0	0.000 km
for snap-action switching element with soldering terminal  Terminal cover	61-9830.2	0.002 kg
for indicator complete	61-9831.2	0.001 kg

# Illumination

# Single-LED, T1 3/4 MG

# **Additional Information**

- When using AC/DC types with AC operation, slight flickering can occure
- Luminous intensity data of the LEDs on direct voltage
- Electrical and optical data are measured at 25 °C
- The specified versions are built with a protection diode (halve wave rectifier) in series and the LED
- Luminosity and wave length variations caused by LED manufacturing processes may cause slight differences regarding the illumination
- For supply voltages above 48V, a voltage reduction element (external series resistor or transformer) must be used
- Due to high surface temperatures, the surface resistors must be soldered directly to the terminals of the equipment (use a terminal plate)



Dimensions [mm]

LED colour	Operating voltage	Operation current	Lumi. intensity	Dom. wavelength	Part No.	Weight
Sir	ngle-LED					
red	6 VDC +10 %	15 mA ±15 %	350 mcd	630 nm	10-2J06.3142	0.002 kg
	12 VAC/DC +10 %	7/14 mA ±15 %	330 mcd	630 nm	10-2J09.1062	0.002 kg
	24 VAC/DC +10 %	7/14 mA ±15 %	330 mcd	630 nm	10-2J12.1062	0.002 kg
	28 VAC/DC +10 %	7/14 mA ±15 %	330 mcd	630 nm	10-2J13.1062	0.002 kg
	48 VAC/DC +10 %	4/8 mA ±15 %	200 mcd	630 nm	10-2J19.1042	0.002 kg
yellow	6 VDC +10 %	15 mA ±15 %	300 mcd	587 nm	10-2J06.3144	0.002 kg
	12 VAC/DC +10 %	7/14 mA ±15 %	280 mcd	587 nm	10-2J09.1064	0.002 kg
	24 VAC/DC +10 %	7/14 mA ±15 %	280 mcd	587 nm	10-2J12.1064	0.002 kg
	28 VAC/DC +10 %	7/14 mA ±15 %	280 mcd	587 nm	10-2J13.1064	0.002 kg
	48 VAC/DC +10 %	4/8 mA ±15 %	180 mcd	587 nm	10-2J19.1044	0.002 kg
green	6 VDC +10 %	7 mA ±15 %	1050 mcd	525 nm	10-2J06.3145	0.002 kg
	12 VAC/DC +10 %	4/7 mA ±15 %	1050 mcd	525 nm	10-2J09.1065	0.002 kg
	24 VAC/DC +10 %	4/7 mA ±15 %	1050 mcd	525 nm	10-2J12.1065	0.002 kg
	28 VAC/DC +10 %	4/7 mA ±15 %	1050 mcd	525 nm	10-2J13.1065	0.002 kg
	48 VAC/DC +10 %	2/4 mA ±15 %	600 mcd	525 nm	10-2J19.1045	0.002 kg
blue	6 VDC +10 %	15 mA ±15 %	680 mcd	470 nm	10-2J06.3146	0.002 kg
	12 VAC/DC +10 %	7/14 mA ±15 %	650 mcd	470 nm	10-2J09.1066	0.002 kg
	24 VAC/DC +10 %	7/14 mA ±15 %	650 mcd	470 nm	10-2J12.1066	0.002 kg
	28 VAC/DC +10 %	7/14 mA ±15 %	650 mcd	470 nm	10-2J13.1066	0.002 kg
	48 VAC/DC +10 %	4/8 mA ±15 %	400 mcd	470 nm	10-2J19.1046	0.002 kg
white	6 VDC +10 %	6 mA ±15 %	900 mcd	x0.31/y0.32 nm	10-2J06.3149	0.002 kg
	12 VAC/DC +10 %	3/6 mA ±15 %	900 mcd	x0.31/y0.32 nm	10-2J09.1069	0.002 kg
	24 VAC/DC +10 %	2.5/5 mA ±15 %	750 mcd	x0.31/y0.32 nm	10-2J12.1069	0.002 kg
	28 VAC/DC +10 %	2.5/5 mA ±15 %	750 mcd	x0.31/y0.32 nm	10-2J13.1069	0.002 kg
	48 VAC/DC +10 %	2/4 mA ±15 %	600 mcd	x0.31/y0.32 nm	10-2J19.1049	0.002 kg

# Filament lamp, T1 3/4 MG

Operating voltage	Operation current	Part No.	Weight
Filame	nt lamp		
6 VAC/DC	120 mA ±10 %	10-1306.1349	0.001 kg
6.3 VAC/DC	200 mA ±10 %	10-1307.1369	0.001 kg
12 VAC/DC	75 mA ±10 %	10-1309.1309	0.001 kg
14 VAC/DC	80 mA ±10 %	10-1310.1319	0.001 kg
18 VAC/DC	40 mA ±10 %	10-1311.1249	0.001 kg
24 VAC/DC	35 mA ±10 %	10-1312.1229	0.001 kg
28 VAC/DC	30 mA ±10 %	10-1313.1209	0.001 kg
	40 mA ±10 %	10-1313.1249	0.001 kg
36 VAC/DC	20 mA ±10 %	10-1316.1179	0.001 kg
	30 mA ±10 %	10-1316.1209	0.001 kg
48 VAC/DC	20 mA ±10 %	10-1319.1179	0.001 kg
	25 mA ±10 %	10-1319.1199	0.001 kg

#### **Series resistor**

#### **Additional Information**

- Only for filament lamp 48 VAC, 25 mA
- For lamp voltage reduction
- Keep to the country specific safety instructions
- Due to high surface temperatures, the surface resistors must be soldered directly to the terminals of the equipment (use a terminal plate)

Operating voltage	Resistance	Part No.	Weight
Series r	resistor		
110 VAC	2.7 kOhm	02-904.0	0.003 kg
125 VAC	3.3 kOhm	02-904.1	0.003 kg
145 VAC	4.7 kOhm	02-904.3	0.003 kg
240 VAC	10 kOhm	02-904.7	0.003 kg

# **Terminal plate empty**

#### **Additional Information**

• For fitting with series resistors

Product attribute	Dimension	Part No.	Weight
Terminal pl	ate empty		
5 spaces	62.5 x 60 x 15 mm	02-912.1	0.025 kg
10 spaces	125 x 60 x 15 mm	02-912.2	0.045 kg
15 spaces	187.6 x 60 x 15 mm	02-912.3	0.090 kg
20 spaces	250 x 60 x 15 mm	02-912.4	0.095 kg

# Emergency-stop switch


# **Emergency-stop legend**

Dimension	Mounting cut-out	Marking	Colour	Part No.	Weight
	delicy-stop ledelid				
Ø 43 x 1.7 mm	Ø 16 mm	without marking	yellow	61-9970.0	0.002 kg
Ø 43 x 1.7 mm		without marking NOT-AUS	yellow yellow	61-9970.0 61-9970.1	0.002 kg 0.002 kg
Ø 43 x 1.7 mm					
Ø 43 x 1.7 mm		NOT-AUS	yellow	61-9970.1	0.002 kg

# **Emergency-stop protective shroud**

# **Additional Information**

The protection shroud is not suitable for a proper use of emergency-stop. It can obstruct a sponta-neous operation of the emergency-stop




Dimensions [mm]

Material	Colour	Part No.	Weight
Emergency-sto	op protective shroud		
Aluminium anodised	yellow varnished	61-9965	0.036 kg

# Emergency-stop enclosure, IP 66

#### **Additional Information**

- Bottom grey similar RAL 7035; cover lead-sealable, yellow similar RAL 1004
- With mounting cut-out Ø 16 mm, without antitwist device
- Openings for cable gland M16 or M20

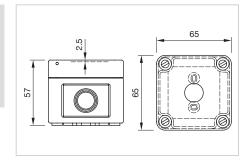

Dimensions [mm]

Dimension	Part No.	Weight
Emergency-stop enclosure		
65 x 65 x 57 mm	61-9480.5	0.099 kg

# Cable gland, IP 68

#### **Additional Information**

- With traction relief
- With fixing nut

Product attribute	Thread	Material	Colour	Part No.	Weight
Cable gland					
Clamping range Ø 4 10 mm, thread length 8 mm	M16 x 1.5	Plastic	grey	61-9481.6	0.007 kg
Clamping range Ø 6 12 mm, thread length 9 mm	M20 x 1.5	Plastic	grey	704.945.6	0.011 kg

# Mounting

# Fixing nut

Product attribute	Material	Part No.	Weight
Fixing nut			
special recommended for keylock switches	Metal	31-991	0.005 kg
Fixing nut			
Standard delivery	Plastic	61-9915.0	0.002 kg

# **Anti-twist ring**

Mounting cut-out	ArtNr.	Gewicht
Ø 16 mm	51-910	0.001 kg
Ø 22.5 mm	61-9912.0	0.002 kg

# Reducing ring

# **Additional Information**


Only for use of devices with front size 24 x 24 mm and Ø 24 mm, mounting cut-out Ø 22.5 mm to Ø 16.5 mm, without keylock- and selector switch

Part No.		Weight
0	Reducing ring	
61-9960		0.003 kg

# **Tool set**

#### **Additional Information**

- Consists of lens remover, lamp-and LED remover, mounting tool and dismantling tool
- For dismantling keep care of the enclosed assembly instruction

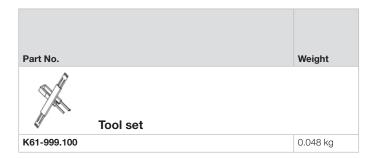

# Lens remover

Product attribute	Part No.	Weight
Lens remover		
for raised design	02-905	0.011 kg
Lens remover		
for flush design	61-9730.0	0.011 kg

# Lamp remover

#### **Additional Information**


▲ Caution: A switching process might be released when replacing the lamp

Part No.	Weight
Lamp remover	
61-9740.0	0.003 kg

# **Mounting tool**

#### **Additional Information**


• For device with mounting cut-out Ø 16 mm

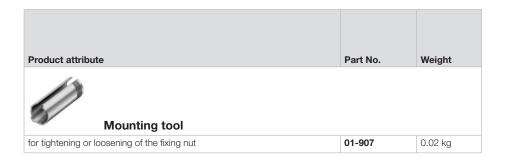

# **Dismantling tool**

#### **Additional Information**


• For dismantling of the switching element

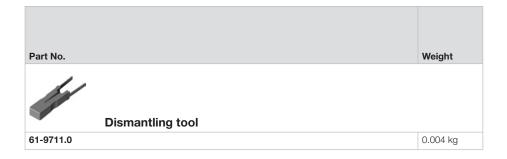

# **Enclosure, IP 66**

#### **Additional Information**

- Cover lead-sealable
- Openings for cable gland M16 or M20
- With mounting cut-out Ø 16 mm, without antitwist device



Dimensions [mm]

Dimension	Colour	Part No.	Weight
Enclosure			
65 x 65 x 57 mm	grey, similar RAL 7035	61-9480.6	0.099 kg


# Cable gland, IP 68

#### **Additional Information**


- With traction relief
- With fixing nut


Product attribute  Cable gland	Thread	Material	Colour	Part No.	Weight
Clamping range Ø 4 10 mm, thread length 8 mm	M16 x 1.5	Plastic	grey	61-9481.6	0.007 kg
Clamping range Ø 6 12 mm, thread length 9 mm	M20 x 1.5	Plastic	grey	704.945.6	0.011 kg


#### **Drawings**

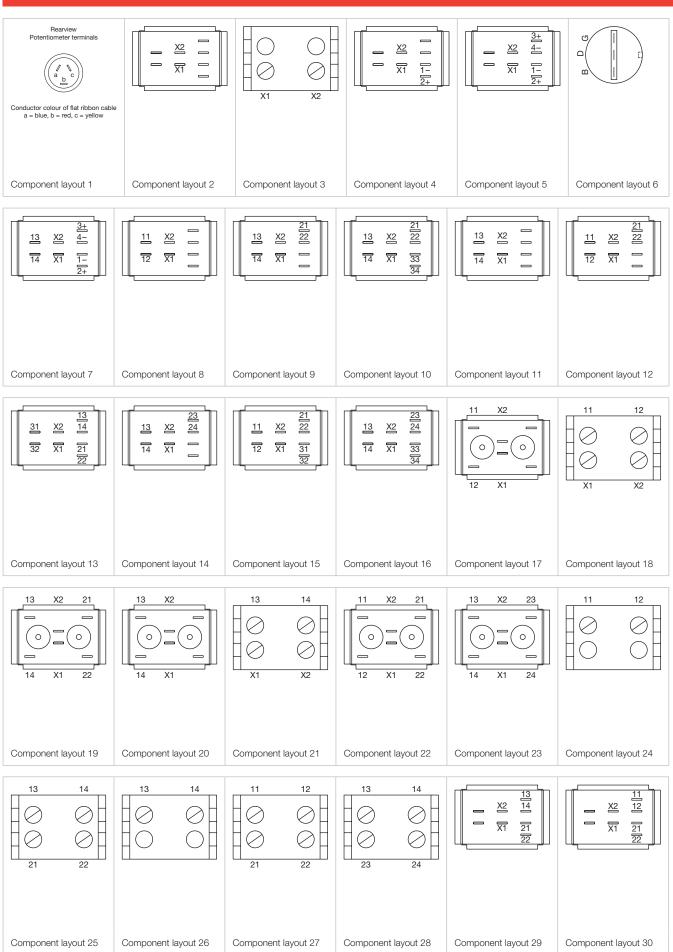

# 61 Drawings

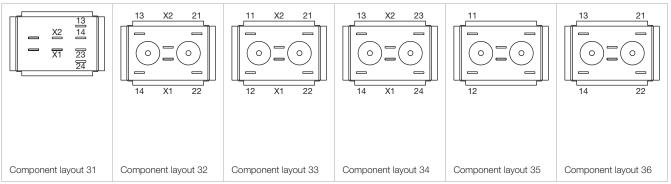

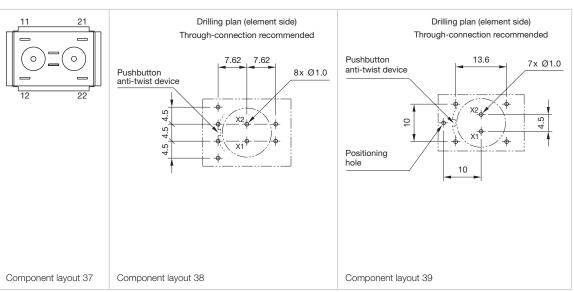

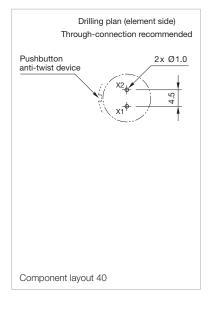

#### Actuator with snap-action switching element

#### **Switching system**

Self-cleaning, double-break snap-action switching system with contact opening width 2 x 0.5 mm (switch with small contact opening width as per EN IEC 61058-1).

The switching elements are optionally equipped with the following switching functions:

One to three normally open (NO) or normally closed (NC), or any combination of NO and NC plus connections for T1 3/4 LED or lamp

The number of switching elements cannot exceed three. The switching elements provided for the 3-position switch actuators are equipped with max. 2 NC or 2 NO or any combination. The number of switching elements cannot exceed two.

#### **Material**

#### Lens

Raised mounting Polymethylmethacrylat (PMMA), as per UL 94 HB, flush mounting Polycarbonat (PC), as per UL 94 V0, or Aluminium anodized

#### Front bezel

Polyetherimid (PEI), as per UL 94 VO, or Aluminium anodized

#### Front ring

Aluminium anodized

#### **Material of contact**

Silver or silver with gold plating

#### Switching element

Diallylphthalate (DAP), as per UL 94 V0 and Polyamide (PA 66), as per UL 94 V0

### **Actuator housing**

Polyetherimide (PEI), as per UL 94 V0, self-extinguishing

#### **Mechanical characteristics**

# **Terminals**

2 wires 0.75 mm<sup>2</sup> 0.5 mm<sup>2</sup>

# Tightening torque

for fixing nut max. 50 Ncm

#### **Actuating torque**

Selector-/Keylock switch 2.5... 10 Ncm

#### **Actuating force**

Pushbutton 2.7...3.6N

#### **Actuating travel**

Pushbutton 3 mm

Selector-/keylock switch 2 positions 3 positions Momentary action approx. 42° approx. 2 x 42° Maintained action approx. 90° approx. 2 x 90°

#### Rebound time

The rebound times apply to normal manual activation Contact making 3 ms
Contact breaking 5 ms

#### **Mechanical lifetime**

as per DIN IEC 60512-5-6 and EN IEC 60947-5-1

Pushbutton maintained action
Pushbutton momentary action
Pushbutton momentary action
Evelock switch
Selector switch

1 million cycles of operation
2 million cycles of operation
50 000 cycles of operation
100 000 cycles of operation

#### **Electrical characteristics**

#### **Standards**

The devices comply with: EN IEC 61058-1 and EN IEC 60947-5-1

#### Rated Operational Voltage U

250 VAC/DC as per EN IEC 60947-1

#### Rated Insulation Voltage U

320 VAC, as per EN IEC 60947-5-1

#### Rated Impulse Withstand Voltage U<sub>imp</sub>

4 kV, as per EN IEC 60947-5-1

#### **Contact resistance**

New state with silver contact  $\leq$  100 m $\Omega$  as per DIN IEC 60512-2-4, measured at 100 mA, 10 V

New state with gold plated contact  $\leq 50\,\text{m}\Omega$  as per DIN IEC 60512-2-3, measured at 20 mV, 10 mA

#### **Electrical life**

 $\geq 50\,000$  cycles of operation at 250 VAC, 5 A, cos $\phi$  0.95, as per EN IEC 60947-5-1

# Electrostatic discharge (ESD)

Keylock switch 11 kV

#### Conventional free air thermal current I,

5A, as per EN IEC 60947-5-1

the maximum current in continuous operation and at ambient temperature must not exceed the quoted maximum values.

#### **Switch rating**

Switch rating AC with silver contact or silver contact with gold plating, service category AC-15, as per EN IEC 60947-5-1

Voltage 125 VAC 250 VAC Current 2.5 A 2 A

Switch rating DC for silver contact or silver contact with gold plating, service category DC-13, as per EN IEC 60947-5-1

Voltage 250 VDC Current 0.15 A

#### Recommended minimum operational data

Material of contact Silver Silver with gold plating

Voltage 20 VAC/DC 5 VAC/DC Current 100 mA 10 mA

# 61 Technical data

#### **Electric strength**

2500 VAC, 50 Hz, 1 min., as per DIN IEC 60512-2-11 between all terminals and earth

#### Overvoltage category

III, as per EN IEC 60947-5-1

#### **Protection class**

Class II, as per EN IEC 61058-1

#### **Degree of pollution**

3, as per EN IEC 60947-1

#### **Environmental conditions**

#### Storage temperature

-40°C...+85°C

#### Operating temperature

-25°C...+55°C

#### **Protection degree**

as per EN IEC 60529

Front side IP 65, rear side IP 40

#### **Shock resistance**

(semi-sinusoidal)

max. 10 m/s<sup>2</sup>, pulse width 11 ms, 3-axis, as per EN IEC 60068-2-27

#### Vibration resistance

(sinusoidal)

max. 100 m/s<sup>2</sup> at 10 Hz... 500 Hz, as per EN IEC 60068-2-6

#### Climate resistance

Damp heat, cyclic

96 hours, +25 °C/97 %, +55 °C/93 % relative humidity, as per EN IEC 60068-2-30

Damp heat, state

56 days, +40 °C/93 % relative humidity, as per EN IEC 60068-2-78

Rapid change of temperature

100 cycles, -40 °C ... +80 °C, as per EN IEC 60068-2-14

#### **Approvals**

#### **Approbations**

CB (IEC 61058)

CB (IEC 60947)

CSA

ENEC (EN 61058)

CCA-NTR (EN 60947)

CCC

CENELEC (IEC 60947-5-1)

Germanischer Lloyd

GOST UL SEV

NFF

#### **Declaration of conformity**

CE

### Actuator with slow-make switching element

# Switching system

Double-break slow-make system, contact opening width 2 x 1.5 mm, with 2 x 2 contact points per switching element. NC-contact elements in the slow-make elements fulfill requirements of switches with forced opening as per EN IEC 60947-5-12.17. The slow-make elements are optionally obtainable with the following switching functions: 1 NO or 2 NO, 1 NC or 2 NC, 1 NO + 1 NC.

#### Switching element

Diallylphthalate (DAP), as per UL 94 V0 and Polyamide (PA 66), as per UL 94 V0

# **Actuator housing**

Polyetherimide (PEI), as per UL 94 VO, self-extinguishing

### **Mechanical characteristics**

#### **Terminals**

	rigid 0.5 1.5 mm <sup>2</sup> 0.75 mm <sup>2</sup>	flexible 0.5 0.75 mm <sup>2</sup> 0.5 mm <sup>2</sup>	superflexible 0.5 mm <sup>2</sup>
<ul><li>Screw</li><li>wire</li></ul>	0.5 1.5 mm <sup>2</sup>	0.50.75 mm <sup>2</sup>	0.5 mm <sup>2</sup>
	0.75 mm <sup>2</sup>		0.5 mm <sup>2</sup>

#### odized Tightening torque

for fixing nut max. 50 Ncm

#### **Actuating torque**

Selector-/Keylock switch 4...16 Ncm

#### **Material**

#### Lens

Raised mounting Polymethylmethacrylat (PMMA), as per UL 94 HB, flush mounting Polycarbonat (PC), as per UL 94 V0, or Aluminium anodized

#### Front bezel

Polyetherimid (PEI), as per UL 94 VO, or Aluminium anodized

#### Front ring

Aluminium anodized

#### Material of contact

Silver or gold (specified for operation for low level switching)

#### **Actuating force**

Pushbutton 3.5...11 N

Emergency-stop switch max. 65 N

#### **Actuating travel**

Pushbutton 3 mm

Emergency-stop switch 10 mm

Selector-/keylock switch 2 positions 3 positions Momentary action approx. 42° approx. 2 x 42° Maintained action approx. 90° approx. 2 x 90°

#### Rebound time

2 ms, contact making and contact breaking the rebound times apply to normal manual activation

#### **Mechanical lifetime**

as per DIN IEC 60512-5-6 and EN IEC 60947-5-1

Pushbutton maintained action
Pushbutton momentary action
Emergency-stop switch
Keylock switch
Selector switch

1 million cycles of operation
2 million cycles of operation
6050 cycles of operation
50 000 cycles of operation
100 000 cycles of operation

#### **Electrical characteristics**

#### **Standards**

The devices comply with: EN IEC 61058-1 and EN IEC 60947-5-1, EN IEC 60947-5-5 (Emergency-stop)

#### **Electrical life**

 $\geq 50\,000$  cycles of operation at 250 VAC, 5 A,  $cos\phi$  0.95, as per EN IEC 60947-5-1

Switching element of emergency-stop 6050 cycles of operation, as per EN IEC 60947-5-5

#### Electrostatic discharge (ESD)

Keylock switch 11 kV

### **Electric strength**

 $4000\,\text{VAC},\,50\,\text{Hz},\,1$  min., as per DIN IEC 60512-2 between all terminals and earth

#### Overvoltage category

III, as per EN IEC 60947-5-1

#### **Protection class**

Class II, as per EN IEC 61058-1

#### **Degree of pollution**

3, as per EN IEC 60947-1

#### **Electrical characteristics for silver contacts**

#### Rated Operational Voltage U

250 VAC/DC as per EN IEC 60947-1

#### Rated Insulation Voltage U

320 VAC, as per EN IEC 60947-5-1

# Rated Impulse Withstand Voltage U<sub>imp</sub>

4kV, as per EN IEC 60947-5-1

#### **Contact resistance**

New state  $\leq$  50 m $\Omega$ , as per DIN IEC 60512-2-4, measured at 100 mA, 10 V

#### Conventional free air thermal current Ith

5A, as per EN IEC 60947-5-1

the maximum current in continuous operation and at ambient temperature must not exceed the quoted maximum values.

#### Switch rating

Switch rating AC with silver contact and screw terminal, service category AC-15, as per EN IEC 60947-5-1

Voltage 125 VAC 250 VAC Current 3A 2A

Switch rating with silver contact and screw terminal, service category DC-13, as per EN IEC 60947-5-1

Voltage 250 VDC Current 0.2 A

### Recommended minimum operational data

20 VAC/DC, 100 mA

#### **Electrical characteristics for gold contacts**

#### Rated Operational Voltage U<sub>e</sub>

50 VAC/DC, as per EN IEC 60947-5-1

#### Rated Insulation Voltage Ui

U<sub>i</sub> = 320 VAC, as per EN IEC 60947-5-1

#### Rated Impulse Withstand Voltage U<sub>imp</sub>

0.8 kV, as per EN IEC 60947-1

#### **Contact resistance**

New state  $\leq 50 \,\mathrm{m}\Omega$ 

as per DIN IEC 60512-2-4, measured at 20 mV, 10 mA

#### Conventional free air thermal current Ith

3A, as per EN IEC 60947-5-1

the maximum current in continuous operation and at ambient temperature must not exceed the quoted maximum values.

#### Switch rating

Switch rating AC with gold contact, service category AC-15, as per EN IEC 60947-5-1

Voltage 50 VAC Current 0.5 A

Switch rating with gold contact, service category DC-13, as per EN IEC 60947-5-1

Voltage 50 VDC Current 0.1 A

#### Recommended minimum operational data

Voltage 10 mVAC/DC

Current 2mA

# Technical data

#### **Environmental conditions**

#### Storage temperature

-40°C...+85°C

#### Operating temperature

-25°C...+55°C

#### **Protection degree**

as per EN IEC 60529 Frontside IP 65, rear side IP 40

#### Shock resistance

(semi-sinusoidal)

max. 100 m/s<sup>2</sup>, pulse width 11 ms, 3-axis, as per EN IEC 60068-2-27

#### Vibration resistance

(sinusoidal)

max. 100 m/s<sup>2</sup> at 10 Hz... 500 Hz, as per EN IEC 60068-2-6

#### Climate resistance

Damp heat, cyclic 96 hours, +25°C/97%, +55°C/93% relative humidity, as per EN IEC 60068-2-30

56 days, +40°C/93% relative humidity, as per EN IEC 60068-2-78

Rapid change of temperature

#### **Approvals**

#### **Approbations**

CB (IEC 61058) CB (IEC 60947)

CSA

ENEC (EN 61058) CCA-NTR (EN 60947)

CCC

CENELEC (IEC 60947-5-1)

Germanischer Lloyd

**GOST** UL SEV **NFF** 

#### **Declaration of conformity**

Damp heat, state

100 cycles, -40 °C ... +80 °C, as per EN IEC 60068-2-14

#### **Actuator with flasher element**

#### **Material**

#### Lens

Raised mounting Polymetylmethacrylat PMMA, as per UL 94 HB, flush mounting Polycarbonat (PC), as per UL 94 VO

# **Actuator housing**

Polyetherimide (PEI), as per UL 94 V0, self-extinguishing

#### Flasher element

Polyetherimide (PEI), as per UL 94 VO

#### **Mechanical characteristics**

#### **Terminals**

Soldering terminal

#### **Tightening torque**

for fixing nut max. 50 Ncm

#### **Electrical characteristics**

#### Illumination

28 VAC/DC Filament lamp 14 VAC/DC Power consumption 80 mA 44 mA Single-LED 12 VAC/DC 28 VAC/DC Power consumption 15 mA 18<sub>m</sub>A

#### Flashing frequency

1 Hz ±0.25 Hz

#### **Pulse duty factor**

approx. 50%

#### **Operating voltage**

12...28 VAC/DC ±10%

#### **Environmental conditions**

#### **Operating temperature**

0°C ... +45°C

#### **Protection degree**

as per EN IEC 60529

Front side IP 65, rear side IP 40

# Buzzer

#### **Buzzer system**

Electronic non-contacting buzzer with IC oscillator

#### **Material**

#### Alarm buzzer case

Polyetherimide

#### Front bezel

Polyamide

#### **Mechanical characteristics**

#### **Terminals**

Plug-in terminal 2.8 x 0.5 mm

#### **Tightening torque**

for fixing nut max. 50 Ncm

#### **Electrical characteristics**

### Frequency (tone)

Approx. 2.0 kHz

#### Interval frequency

 $2\,Hz$ 

# Sound pressure

 $88\,dB$  (A)  $\pm 8\,dB$  at a distance of 0.1 m (IP 40)  $82\,dB$  (A)  $\pm 8\,dB$  at a distance of 0.1 m (IP 65)

Volume variable with a 1  $M\Omega$  potentiometer or corresponding fixed resistor

#### **Operation Voltage/Current**

Typ. 10VDC...26VDC, ≤20mA

#### **Environmental conditions**

### Storage temperature

-40°C...+85°C

#### Service temperature

-25°C...+55°C

#### **Protection degree**

IP 40 IP 65

#### **Approvals**

# **Declaration of conformity**

CE

EAO reserves the right to alter specifications without further notice.

# 61 Marking

#### **General notes**

#### 1. Engraving

In addition to the most commonly used world languages, in DIN1451-3 close spacing, other typefaces are available as Scandinavian, Slavic, Greek, Russian and Polish. Red, blue and black lenses are filled with white colour. Other colour lenses are filled in black. Standard height of letters is 2 mm. If the height is not specified, we will supply 2 mm engraved letters.

#### 2. Hot stamping

For larger series it is worth considering markings by means of hot stamping or laser engraving. We will pleased to advise you. For letters and figures, typefaces with 2.5 mm, 3 mm and 4 mm are available.

#### 3. Film inserts


Instead of using engraving the lenses can be fitted with transparent film inserts, as an alternative. In the case of use of a smokeblack lens the fitted film becomes readable only if the lamp is on. The film thickness is 0.2 mm. For lenses  $\emptyset$  24 mm and  $\emptyset$  25 mm with Part No. 619642.x the marking takes place directly on the text plate Part No. 61-9707.7, instead of a film insert.

Important: Consider pushbutton mounting orientation before specifying engraving characters!

#### Lenses for Indicators, Illuminated pushbuttons, flush mounting

All dimensions in mm

Front size (Lens)	Film insert max. size	Height of letters h	Number of lines	Number of capital letters per line (target value)	Number of small letters per line (target value)	Image
24 x 24 (18 x 18)	15.1 x 15.1	2	4	8-9	9	B3
		3	3	7-8	8	В3
		4	2	4-5	5	В3
		5	2	4	4-5	B3
		6	1	4	4	B3
		8	1	2-3	2-3	В3
24 x 30 (18 x 24) 15.1 x 21	15.1 x 21	2	4	12	13	B1
			5	8-9	9	B2
		3	3	10-11	11-12	B1
			4	7-8	8	B2
		4	2	7	8	B1
			3	4-5	5	B2
		5	2	5-6	6	B1
				4	4-5	B2
		6	1	4-5	5	B1
			2	3	3-4	B2
		8	8 1	3-4	3-4	B1
				2-3	2-3	B2
Ø 25 (Ø 19.7)	Marking plate	2	3	6	6	B4
		3	2	5	6	B4
		4	2	3	4	B4
		5	1	2	3	B4
		6	1	2	3	B4
		8	1	2	2	B4





B1



B2



ВЗ




В4

# Lenses for Indicators, Illuminated pushbuttons, raised mounting

All dimensions in mm

Front size (Lens)	Film insert max. size	Height of letters h	Number of lines	Number of capital letters per line (target value)	Number of small letters per line (target value)	Image
18 x 18 (15.3 x 15.3)	12.7 x 12.7	2	4	7-8	8	В3
		3	3	6-7	7	В3
		4	2	4-5	5	B3
		5	2	3-4	4	B3
		6	1	3	3-4	B3
		8	1	2-3	2-3	B3
18 x 24 (15.3 x 21.5)	12.7 x 18.7	2	4	11	12	B1
			5	7-8	8	B2
		3	3	9-10	10-11	B1
			4	6-7	7	B2
		4	2	7	7-8	B1
			3	4-5	5	B2
		5	2	5-6	6	B1
				3-4	4	B2
		6	1	4-5	5	B1
			2	3	3-4	B2
		8	1	3-4	3-4	B1
				2-3	2-3	B2
24 x 24 (20 x 20)	16.9 x 16.9	2	4	9	10	В3
		3	3	7-8	9	В3
		4	2	4-5	5	В3
		5	2	4	4-5	В3
		6	1	4	4	В3
		8	1	2	2	В3
Ø 18 (Ø 15.8)	Ø 12.8	2	3	6	6	B4
		3	2	5	6	B4
		4	2	3	4	B4
		5	1	2	3	B4
		6	1	2	3	B4
		8	1	2	2	B4
Ø 24 (Ø 19.7)	Marking plate	2	3	6	6	B4
		3	2	5	6	B4
		4	2	3	4	B4
		5	1	2	3	B4
		6	1	2	3	B4
		8	1	2	2	B4





B1



B2



ВЗ




B4

# 61 Marking

# Engraving legend plates

All dimensions in mm

Height of letters h	Number of lines	Number of letters per line (target value)
3.0	1	11
3.0	2	11
4.0	1	7
8.0	1	4



#### **Suppressor circuits**


When switching inductive loads such as relays, DC motors, and DC solenoids, it is always important to absorb surges (e.g. with a diode) to protect the contacts. When these inductive loads are switched off, a counter emf can severely damage switch contacts and greatly shorten lifetime.

Fig. 1 shows an inductive load with a free-wheeling diode connected in parallel. This free-wheeling diode provides a path for the inductor current to flow when the current is interrupted by the switch. Without this free-wheeling diode, the voltage across the coil will be limited only by dielectric breakdown voltages of the circuit or parasitic elements of the coil. This voltage can be kilovolts in amplitude even when nominal circuit voltages are low (e. g. 12 VDC) see Fig. 2.


The free-wheeling diode should be chosen so that the reverse breakdown voltage is greater than the voltage driving the inductive load. The DC blocking voltage (VR) of the free-wheeling diode can be found in the datasheet of a diode. The forward current should be equal or greater than the maximum current flowing through the load.

To get an efficient protection, the free-wheeling diode must be connected as close as possible to the inductive load!

Switching with inductive load Fig. 1

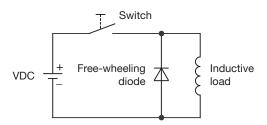

Counter EMF over load without free-wheeling diode Fig. 2



# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

# EAO:

61-9730.0 61-8520.12 61-9351.4 61-9671.7 61-9681.7 61-9331.4 61-9600.1 61-9823 61-2701.0/D 61-9642.3 61-2605.0/D 61-2601.0/D 61-2603.0/D 61-2804.0/D 61-9820.1 61-9211.9 61-8006.01 61-9643.401 61-9600.0 61-9480.6 61-2602.0/D 61-9642.4 61-9643.703 61-8675.11 61-8430.22 61-9681.4 61-1300.0 61-9351.3 61-4710.0 61-2101.0/D 61-0010.02 61-8670.17 61-9221.5 61-9681.2 61-9933.1 61-9643.601 61-9331.2 61-9830.2 61-9671.3 61-8574.12 61-9642.7 61-0039.0 61-3440.4/8 61-8755.37 61-9331.6 61-1120.0 61-9351.6 61-8470.12 61-8460.12 61-9643.501 61-8550.22 61-9671.1 61-9028.60 61-8102.02 61-8410.12 61-9970.3 61-9593.0 61-9643.301 61-8755.11 61-8550.22 61-9321.2 61-2705.0/D 61-9932.1 61-8650.17 61-9771.8 61-9331.7 61-9331.5 61-9932.0 61-2802.0/D 61-9642.5 61-9930.0 61-8610.17 61-4610.0 61-9311.3 61-9450.0 61-9841.2 61-8480.12 61-9681.6 61-9593.2 61-9351.7 61-2604.0/D 61-8655.11 61-8450.22 61-8640.17 61-8620.17 61-8212.22 61-9671.4 61-9311.7 61-2501.0/D 61-9933.10 61-9643.602 61-9965 61-9453.0 61-8640.11 61-9336.7 61-9934.8 61-9711.0 61-9707.7 61-9351.5 61-9781.0