

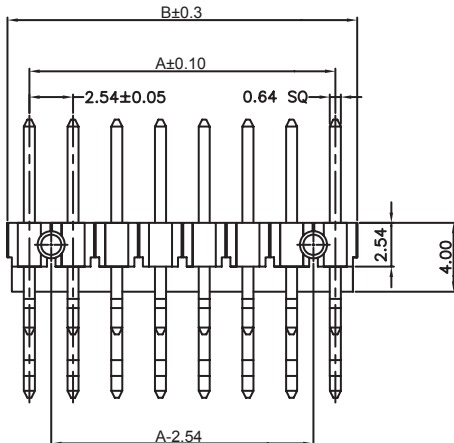
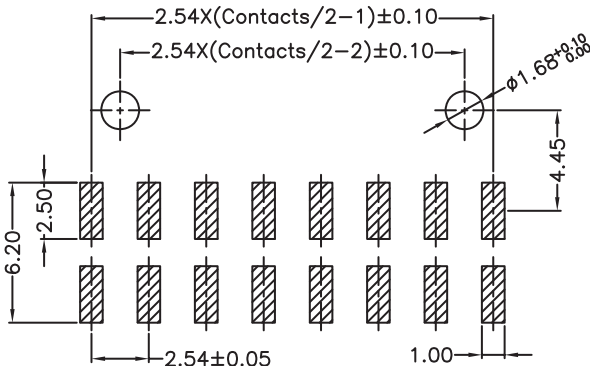
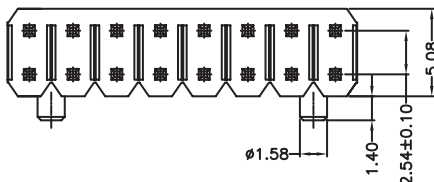
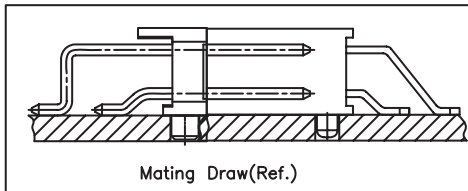



1		2		3		4		5	
				 PCB LAYOUT - COMPONENT VIEW		TECHNICAL CHARACTERISTICS MATERIAL INSULATOR: PA 6T FLAMABILITY RATING: UL94-V0 COLOR: BLACK CONTACT MATERIAL: COPPER ALLOY CONTACT TYPE: STAMPED CONTACT PLATING: GOLD ENVIRONMENTAL OPERATING TEMPERATURE: -40°C UP TO +105°C COMPLIANCE: LEAD FREE AND ROHS ELECTRICAL CURRENT RATING: 3 A WORKING VOLTAGE: 250 VAC/DC INSULATION RESISTANCE: >1000MΩ WITHSTANDING VOLTAGE: 600 VAC/min CONTACT RESISTANCE: 20 mΩ max STANDARD  CERTIFIED: E323964 SOLDERING JEDEC LEAD FREE REFLOW SOLDERING PROCESS PACKAGING TAPE & REEL DIMENSIONS A = 2.54 x (NB. PINS/2-1) B = 2.54 x (NB. PINS/2) AVAILABLE IN: 6-8-10-12-14-16-20-22-24-26			
		 Mating Draw(Ref.)							
RoHS Compliant				PROJECTION:		GENERAL TOLERANCE			
G						.X = ± 0.2		DESCRIPTION: WR-PHD - 2.54MM PIN HEADER - SMT TYPE DOUBLE ROW RIGHT ANGLE WERI PART NO: 610 1xx 249 121	
F						.XX = ± 0.15			
E									
D									
C									
B	29-JUL-16	CERTIFICATION UL	AK	APPROVAL: GMo		UNIT: MM			
A	06-NOV-14	PDF	AS			SCALE:			
REV	DATE	FILE	BY			SHEET: 1/3			
						DRAW: AS			
								SIZE	
								A4	

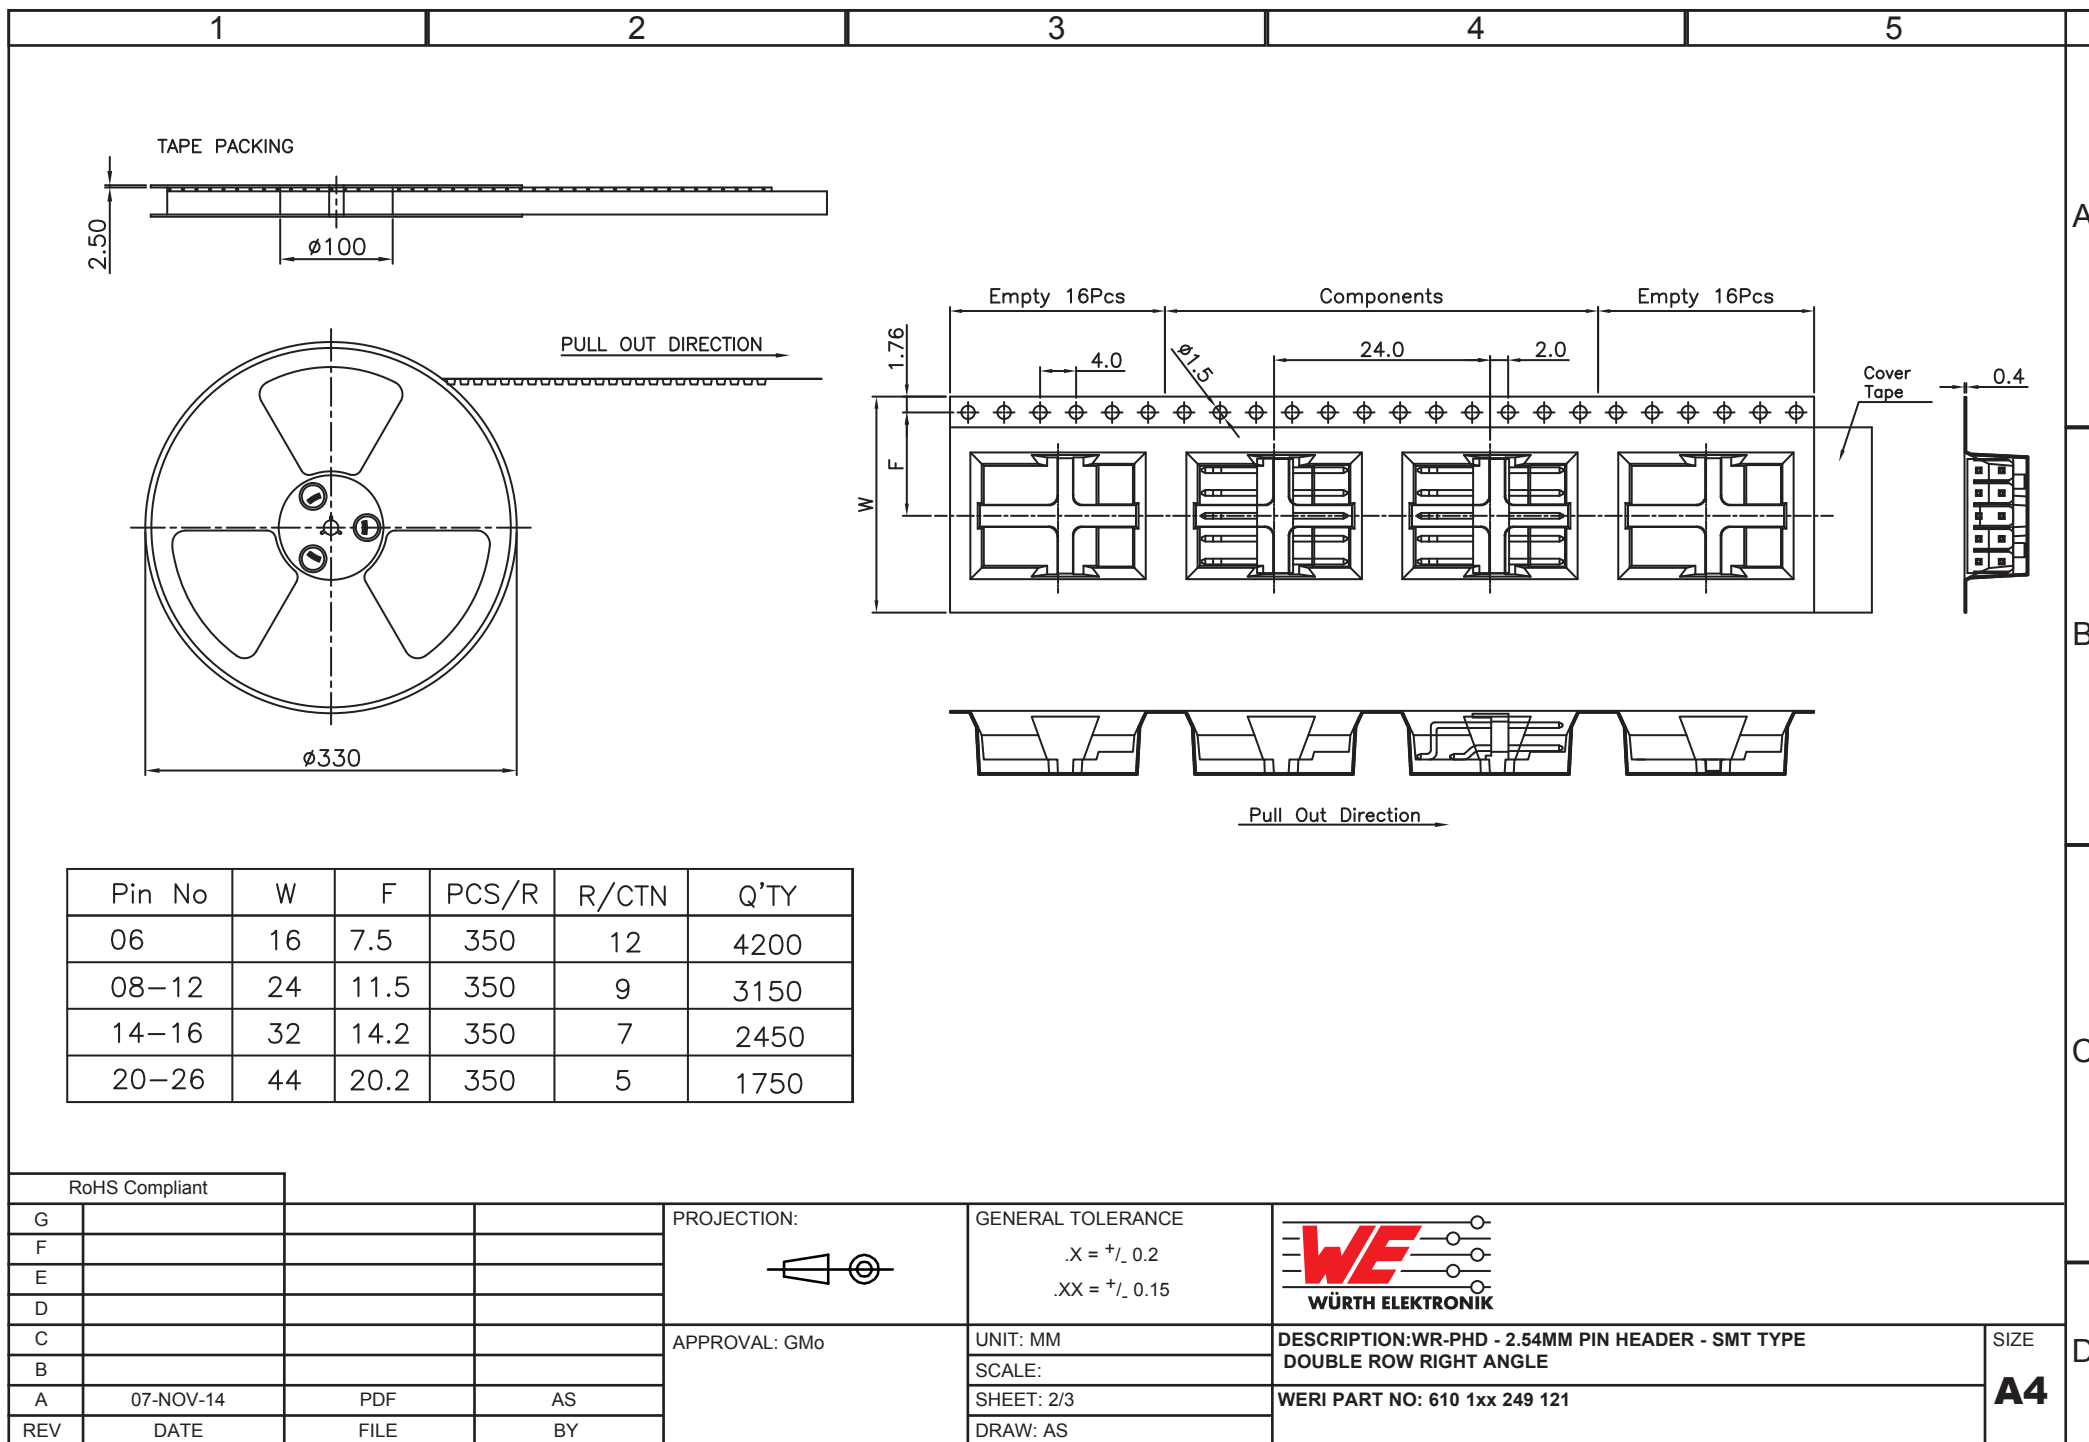

RoHS Compliant

G	F	E	D	C	B	A	REV
						07-NOV-14	DATE
						PDF	FILE
						AS	BY

PROJECTION:



APPROVAL: GMo

GENERAL TOLERANCE

.X = +/- 0.2

.XX = +/- 0.15

UNIT: MM

SCALE:

SHEET: 2/3

DRAW: AS



WÜRTH ELEKTRONIK

DESCRIPTION:WR-PHD - 2.54MM PIN HEADER - SMT TYPE
DOUBLE ROW RIGHT ANGLE

WERI PART NO: 610 1xx 249 121

SIZE
A4

1		2		3		4		5				
Cautions and Warnings: This electronic component is designed and developed with the intention for use in general electronics equipments. Before incorporating the components into any equipments in the field such as aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. where higher safety and reliability are especially required or if there is possibility of direct damage or injury to human body, Wurth Elektronik must be asked for a written approval. In addition, even electronic component in general electronic equipments, when used in electrical circuits that require high safety, reliability functions or performance, the sufficient reliability evaluation-check for the safety must be performed before by the user before usage.												A
												B
												C
												D
RoHS Compliant				PROJECTION: 		GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15		 WÜRTH ELEKTRONIK				
G												
F												
E												
D												
C				APPROVAL: JC		UNIT: MM		DESCRIPTION: DISCLAIMER		SIZE A4		
B						SCALE:						
A	10-SEP-14	PDF	QL			SHEET: 3/3		WERI PART NO: DISCLAIMER				
REV	DATE	FILE	BY			DRAW: QL						

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Würth Electronics:](#)

[610120249121](#) [610110249121](#) [610122249121](#) [610124249121](#) [610108249121](#) [610106249121](#) [610126249121](#)
[610112249121](#) [610114249121](#) [610116249121](#)