


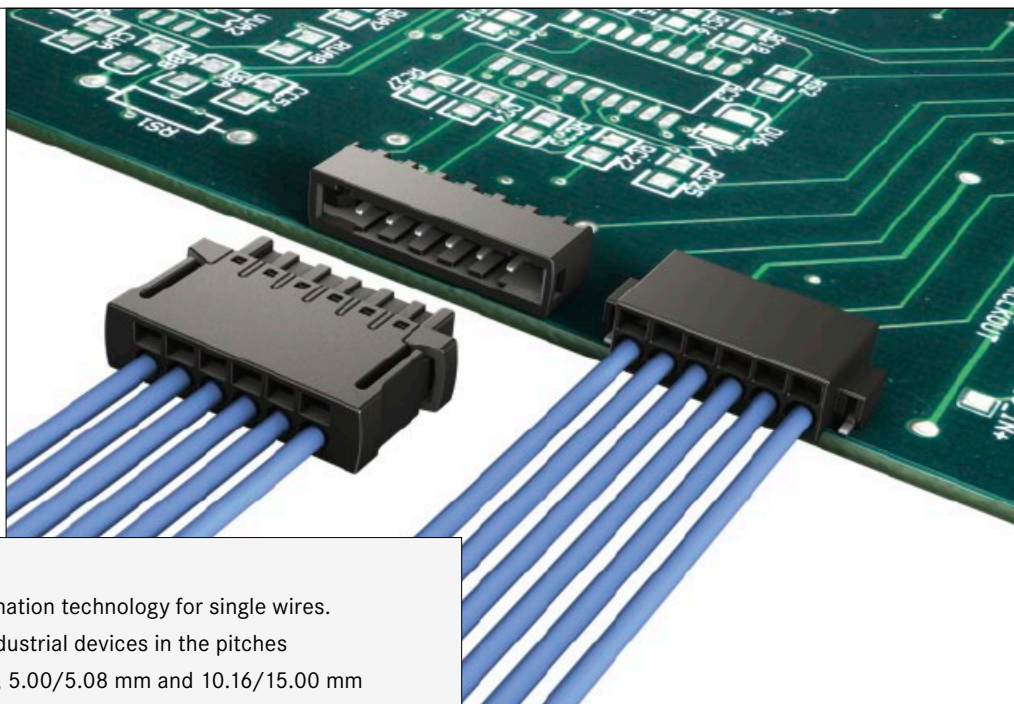

All components are particularly suited for reflow- and wave-soldering on the PCB and offer field assembly with PushIn, insulation displacement and screw termination for single wires.

CONNECTION TYPE		ENVIRONMENT		APPLICATION						
Board to Board	Cable/Wire to Board	IP20	IP65 / IP67	Data	Signal	Power	high performance			
							Data transfer rate	Shielding	Number of contacts, contact density	Voltage, working current

Cable termination

Han-Quick Lock®

IDC

Crimp

PCB termination

THT

SMC

SMT

Application standard

Housing integration

Separate housing

Integrated housing