

NUMBER GS-12-547	TYPE PRODUCT SPECIFICATION		
TITLE 0.8mm BergStak® Product Specification		PAGE 1 of 8	REVISION F
		AUTHORIZED BY Jim Meng	DATE 20 Apr 15
		CLASSIFICATION UNRESTRICTED	

1.0 **OBJECTIVE**

This specification defines the performance, test, quality and reliability requirements of 0.8mm pitch BergStak® product.

2.0 **SCOPE**

This specification is applicable to the termination characteristics of 0.8mm pitch BergStak® family of products (**receptacle with plug mating height 5.0mm to 20.0mm**), with 30u" Palladium-Nickel plating and 8u" Min Au plating, which provides electrical connections between parallel mounted boards.

3.0 **GENERAL**

This document is composed of the following sections:

<u>PARAGRAPH</u>	<u>TITLE</u>
1.0	OBJECTIVE
2.0	SCOPE
3.0	GENERAL
4.0	APPLICABLE DOCUMENTS
4.1	Standards and Specifications
5.0	REQUIREMENTS
5.1	Qualification
5.2	Material
5.3	Finish
5.4	Design and Construction
5.5	Rating
6.0	PERFORMANCE
6.1	Performance
6.2	Test Methods
6.3	Test Sequence

4.0 **APPLICABLE DOCUMENTS**

4.1 Standards and Specifications

- 4.1.1MIL-STD-202: Test methods for electronic and electrical component parts.
- 4.1.2MIL-STD-1344: Test methods for electronic connectors.
- 4.1.3EIA 364: Electronic connector/socket test procedures including environmental classifications.
- 4.1.4QQ-N-290: Nickel plating.
- 4.1.5QQ-N-533: BeCu strip.
- 4.1.6MIL-G-45204: Gold plating electrodeposited
- 4.1.7MIL-C-45662: Calibration system requirements

NUMBER GS-12-547	TYPE PRODUCT SPECIFICATION		
TITLE 0.8mm BergStak® Product Specification		PAGE 2 of 8	REVISION F
		AUTHORIZED BY Jim Meng	DATE 20 Apr 15
		CLASSIFICATION UNRESTRICTED	

5.0 REQUIREMENTS

5.1 Qualification

Connectors furnished under this specification shall be capable of meeting the qualification test requirements specified herein.

5.2 Material

- 5.2.1 Housing: All housing materials shall be high temperature plastic, rated flame retardant 94V-0 in accordance with UL-94.
- 5.2.2 Receptacle Terminal: **Nickel Copper**
- 5.2.3 Plug Terminal: Brass.
- 5.2.4 Metal Cap: Stainless steel.
- 5.2.5 Hold Down: Brass.

5.3 Finish

The finish for applicable components shall be specified in product drawings with plating area, plating material and plating thickness.

5.4 The thickness of the PCB solder paste

Below data is FCI recommended dimension, For some customer's process are different (such as, PCB thickness, solder temperature, solder paste type, etc.), customer can according to the actual application environment adjust the solder paste thickness.

- 5.4.1 The position less than 120pin, recommend using solder paste thickness 0.15mm Min.
- 5.4.2 The position greater than or equal to 120pin, recommend using solder paste thickness 0.18mm Min.

5.5 Design and Construction

The connector shall be a multi-piece assembly having two rows of contacts with surface mount solder-tail terminations for installation on printed wiring board.

5.6 Rating

Voltage Rating	100V AC
Current Rating	0.8A Max.
Temperature Rating	-40°C ~ 125°C

6.0 PERFORMANCE

Unless otherwise specified, the performance of connectors given in the attached list shall satisfy the values specified in Table 6.1. The performance test shall follow the test method and the test sequence given in Table 6.2 & 6.3 under the environmental conditions listed below. All connectors to be tested shall be free of defects such as burr, flaw, void, blister etc. which will affect the life and application of connectors.

- Temperature ----- 15°C ~ 35°C
- Humidity ----- 25% ~ 85%
- Pressure ----- 86 ~ 106KPa

NUMBER GS-12-547	TYPE PRODUCT SPECIFICATION		
TITLE 0.8mm BergStak® Product Specification		PAGE 3 of 8	REVISION F
		AUTHORIZED BY Jim Meng	DATE 20 Apr 15
		CLASSIFICATION UNRESTRICTED	

6.1 Performance

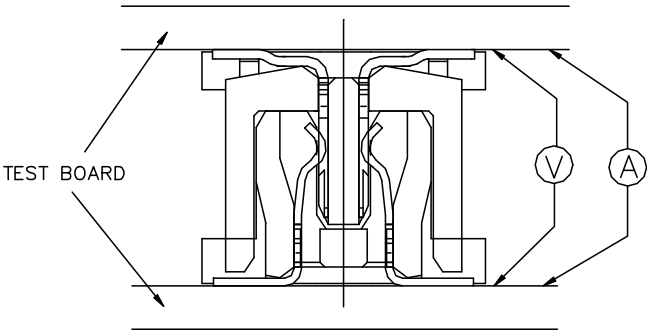
TABLE 6.1

	Test Item	Requirements
6.1.1	Visual Examination	Product shall meet the requirements of product drawings. Visual Examination performed under 10X magnification. Parts should be free from blistering, discoloration, cracks, etc
Electric Requirements		
6.1.2	Low Level Contact Resistance(LLCR)	Initial ----- 30 mΩ Maximum After test ----- 50 mΩ Maximum
6.1.3	Dielectric Withstanding Voltage	No evidence of arc-cover, insulation breakdown or leakage current in excess of 1 mA.
6.1.4	Insulation Resistance	1000 MΩ Minimum
6.1.5	Current Rating	Temperature rise above ambient shall not exceed 30°C with all contacts powered at 0.8A
Mechanical Requirements		
6.1.6	Vibration	No discontinuity greater than 1 microsecond
6.1.7	Shock	No discontinuity greater than 1 microsecond
6.1.8	Mating Force	0.9N (90 gramf) Maximum per contact.
6.1.9	Un-mating Force	0.1N (10 gramf) Minimum per contact.
6.1.10	Durability	Initial ----- 30 mΩ Maximum After test ----- 50 mΩ Maximum
6.1.11	Solderability	Solder coverage ----- 95% Minimum
6.1.12	Resistance to Solder Heat	No evidence of physical or mechanical damage.
6.1.13	Contact Retention Force	1N Minimum per contact.
6.1.14	Reseating	Manually unplug/replug the mated connector assembly.
Environmental Requirements		
6.1.15	Thermal Shock	Initial ----- 30 mΩ Maximum After test ----- 50 mΩ Maximum
6.1.16	Temperature Life	Initial ----- 30 mΩ Maximum After test ----- 50 mΩ Maximum
6.1.17	Cyclical Humidity & Temperature	Initial ----- 30 mΩ Maximum After test ----- 50 mΩ Maximum
6.1.18	Mixed Flow Gas	Initial ----- 30 mΩ Maximum After test ----- 50 mΩ Maximum
6.1.19	Thermal Disturbance	Initial ----- 30 mΩ Maximum After test ----- 50 mΩ Maximum

NUMBER GS-12-547	TYPE PRODUCT SPECIFICATION		
TITLE 0.8mm BergStak® Product Specification		PAGE 4 of 8	REVISION F
		AUTHORIZED BY Jim Meng	DATE 20 Apr 15
		CLASSIFICATION UNRESTRICTED	

6.2 Test Methods

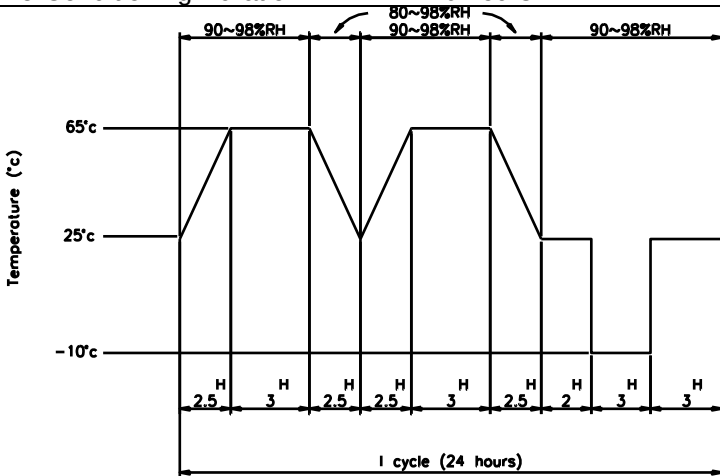
TABLE 6.2

	Test Item	Test Methods
6.2.1	Visual Examination	Visually and functionally inspected. Under 10X magnification.
6.2.2	Low Level Contact Resistance(LLCR)	Plug connector  TEST BOARD Receptacle connector Figure 1 EIA-364-23 Test method of connection as Figure 1. Test current ----- 100 mA Maximum Open circuit ----- 20 mV Maximum Number of readings ----- 100 separable contact interface minimum or 3 connectors whichever is greater
6.2.3	Dielectric Withstanding Voltage	EIA-364-20 Method B, Test Condition I Test voltage ----- 500 Vrms AC Duration ----- 1 minute Measure between adjacent terminals of mated connectors. Number of readings ----- 30 (10 readings per connector set)
6.2.4	Insulation Resistance	EIA-364-21 Test voltage ----- 500 V DC Duration ----- 1 minute Measure between adjacent terminals of mated connectors. Number of readings ----- 30 (10 readings per connector set)
6.2.5	Current Rating	EIA-364-70 Ambient still air ----- 25°C All contact powered ----- 0.8A
6.2.6	Vibration	EIA-364-28 Test Condition V, Letter D Frequency ----- 50 to 2000 Hz Power spectral Density ----- 0.1 g²/Hz Overall rms g ----- 11.95 Duration ----- 1 1/2 hours in each of three mutually perpendicular axes (4 1/2 hours total).

NUMBER GS-12-547	TYPE PRODUCT SPECIFICATION		
TITLE 0.8mm BergStak® Product Specification		PAGE 5 of 8	REVISION F
		AUTHORIZED BY Jim Meng	DATE 20 Apr 15
		CLASSIFICATION UNRESTRICTED	

6.2.7	Shock	EIA-364-27, Test Condition A Accelerated velocity ----- 490 m/s ² (50G). Waveform ----- half-sine shock pulse. Duration ----- 11 mSec. Velocity change ----- 11.3 feet per second Number of cycles ----- 18
6.2.8	Mating Force	EIA-364-13 Operating speed ----- 25 mm/minute No lubrication and utilize free-floating fixture. Number of connectors ----- 5 mated pair
6.2.9	Un-mating Force	EIA-364-13 Operating speed ----- 25 mm/minute No lubrication and utilize free-floating fixture. Number of connectors ----- 5 mated pair
6.2.10	Durability	EIA-364-09 Operating speed ----- 25 mm/minute Number of cycles ----- 100 Pre-Conditioning cycles ----- 25
6.2.11	Solderability	For leaded: Solder temperature ----- 230 ± 5°C. Immersion duration ----- 3± 0.5 seconds Flux immersion ----- 5 to 10 seconds Flux and solder material are defined in MIL-STD-202, method 208 For Non- leaded: Solder temperature ----- 260 ± 5°C. Immersion duration ----- 3± 0.5 seconds Flux immersion ----- 5 to 10 seconds Flux and solder material are defined in MIL-STD-202, method 208
6.2.12	Resistance to Solder Heat	For leaded: Peak temperature ----- 240 ± 5°C. Duration ----- 10 seconds For Non- leaded: Peak temperature ----- 260 ± 5°C. Duration ----- 30 seconds
6.2.13	Contact Retention Force	Operating speed ----- 25 mm/minute Number of readings ----- 30 (10 readings per connector set)
6.2.14	Reseating	Perform 3 cycles mate/unmate
6.2.15	Thermal Shock	EIA-364-32 Method A Temperature range ----- -40 +0/-5°C to 125 +5/-0°C Time at temperature extremes ----- 30 minutes Test Duration (A-4) ----- 10 cycles Transfer Time ----- 5 minutes maximum

NUMBER GS-12-547	TYPE PRODUCT SPECIFICATION		
TITLE 0.8mm BergStak® Product Specification		PAGE 6 of 8	REVISION F
		AUTHORIZED BY Jim Meng	DATE 20 Apr 15
		CLASSIFICATION UNRESTRICTED	

6.2.16	Temperature Life	EIA-364-17 Method A, Test Condition 4 Temperature ----- 105 ±5°C. Duration Condition D ---- 1000 hours. Plug & receptacle to remain mated without electrical load. LLCR measured @ Initial, 250 and 1000 hours Pre-Conditioning Temperature ---- 105 ±5°C Pre-Conditioning Duration ----- 120 hours
6.2.17	Cyclical Humidity & Temperature	 The graph shows a temperature profile over 10 cycles (24 hours each). The temperature ranges from -10°C to 65°C. Humidity is 90~98%RH during the high temperature dwell periods. The profile includes ramps, dwells, and transitions between temperature and humidity levels.
6.2.18	Mixed Flow Gas	EIA-364-31, Method III (omit step 7b) Temperature and humidity are listed figure 2. Duration ----- 10 cycles. EIA-364-65, Class IIA Temperature: 30°C Relative Humidity: 70% Concentration: H ₂ S 10 ppb NO ₂ 200 ppb CL ₂ 10 ppb SO ₂ 100 ppb Test duration: 1) 7days unmated (Both halves are exposed to gas) and 7days mated 2) 14days mated **Test Group 10 is only applicable to parts with 30u GXT.
6.2.19	Thermal Disturbance	EIA-364-1000 Table 4, Test Group 4 Cycle the mated connectors between 15 ± 3°C and 85 ± 3°C as measured on the part. Ramps should be a minimum of 2°C per minute, and dwell times should insure that the contacts reach the temperature extremes (a minimum of 5 minutes). Humidity is not controlled. Perform 10 cycles.

NUMBER GS-12-547	TYPE PRODUCT SPECIFICATION		
TITLE 0.8mm BergStak® Product Specification		PAGE 7 of 8	REVISION F
		AUTHORIZED BY Jim Meng	DATE 20 Apr 15
		CLASSIFICATION UNRESTRICTED	

7.0 QUALIFICATION TEST MATRIX

Table 7.1

TEST ITEM	TEST GROUP										
	Section	1	2	3	4	5	6	7	8	9	10
Visual Examination	6.1.1	1	1	1 11	1 3	1 3	1 3	1	1	1	1
Low Level Contact Resistance (LLCR)	6.1.2	2 5 7 9	2 4 6 8 10	3 10				2 4 6 8 10	2 4 6 8 10	2 4 6 8 10 12	2 4 6 8 10 12 14
Dielectric Withstanding Voltage	6.1.3	3 11									
Insulation Resistance	6.1.4	4 10									
Current Rating	6.1.5	12									
Vibration	6.1.6		7								
Shock	6.1.7		9								
Mating Force	6.1.8			2 5 8							
Un-mating Force	6.1.9			4 6 9							
Durability Pre-conditioning	6.1.10	6	3					3	3	3	3
Durability	6.1.10			7							
Solderability	6.1.11					2					
Resistance To Solder Heat	6.1.12						2				
Contact Retention Force	6.1.13				2						
Reseating	6.1.14							9	7	11	13
Thermal Shock	6.1.15							5			
Temperature Life Pre-Conditioning	6.1.16		5							5	5
Temperature Life	6.1.16								5		
Cyclical Humidity & Temperature	6.1.17	8						7			
Mixed Flowing Gas 7 days unmated	6.1.18										7
Mixed Flowing Gas 7 days mated	6.1.18										9
Mixed Flowing Gas 14 days mated	6.1.18									7	
Thermal Disturbance	6.1.19									9	11
Number of Samples		3/3	3	5	3	3	3	3	3	3	5

NUMBER GS-12-547	TYPE PRODUCT SPECIFICATION		
TITLE 0.8mm BergStak® Product Specification		PAGE 8 of 8	REVISION F
		AUTHORIZED BY Jim Meng	DATE 20 Apr 15
		CLASSIFICATION UNRESTRICTED	

8.0 RECORD RETENTION

REVISION RECORD

REV	PAGE	DESCRIPTION	ECR #	DATE
1	ALL	INITIAL PRELIMINARY	--	12 Feb 08
2		Change test sequence Group I adding Cyclical Humidity & Temp/removing Temp Life Pre-conditioning	--	12 Feb 08
A	ALL	INITIAL RELEASE	S08-0033	1 Apr 08
B	5	Addition of temperature for LF parts to Section 6.2.11 & 6.2.12	S08-0332	8 Oct 08
C	3-4	Current Rating, change to 0.8A, Section 6.1.5 & 6.2.5	S09-0329	28 Oct 09
D	2	Update Section 5.5, Temperature Rating -40°C ~ 125°C	S10-0070	30 Mar 10
E	2	Add solder paste thickness recommended dimension	ELX-N-15808	11 Spe 13
F	1/2/5	Add mating height information, change terminal material and change the resistance to solder Heat time to 30sec.	ELX-N-20663	9 Apr 15

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

61082-142402LF	61083-102402LF	61083-123402LF	61082-141402LF	61082-121402LF	61082-181402LF	61082-
041420LF	61082-041600LF	61082-041602LF	61082-041620LF	61082-042602LF	61082-042622LF	61082-
043420LF	61082-061600LF	61082-061602LF	61082-061620LF	61082-061622LF	61082-062420LF	61082-
062600LF	61082-062602LF	61082-062620LF	61082-081602LF	61082-082600LF	61082-082602LF	61082-
083420LF	61082-083602LF	61082-083622LF	61082-101400LF	61082-101602LF	61082-102600LF	61082-
102622LF	61082-103400LF	61082-103602LF	61082-103622LF	61082-121602LF	61082-122600LF	61082-
123600LF	61082-123622LF	61082-141420LF	61082-141600LF	61082-141602LF	61082-141620LF	61082-
141622LF	61082-141629LF	61082-142602LF	61082-142620LF	61082-142622LF	61082-143600LF	61082-
163400LF	61082-181400LF	61082-181602LF	61082-182400LF	61082-182600LF	61082-183400LF	61082-
183600LF	61082-183622LF	61082-201400LF	61082-201600LF	61082-202400LF	61082-203600LF	61083-
043602LF	61083-044420LF	61083-044600LF	61083-044602LF	61083-044620LF	61083-044622LF	61083-
062602LF	61083-062620LF	61083-063602LF	61083-063622LF	61083-081600LF	61083-081602LF	61083-
081622LF	61083-082602LF	61083-083602LF	61083-084420LF	61083-084602LF	61083-102400LF	61083-
103400LF	61083-103602LF	61083-104400LF	61083-121400LF	61083-122400LF	61083-122600LF	61083-
123400LF	61083-123600LF	61083-123622LF	61083-124600LF	61083-124602LF	61083-141600LF	61083-
141622LF	61083-143600LF	61083-144600LF	61083-161400LF	61083-161420LF	61083-163400LF	61083-
181400LF	61083-182400LF	61083-183400LF	61083-184400LF			