
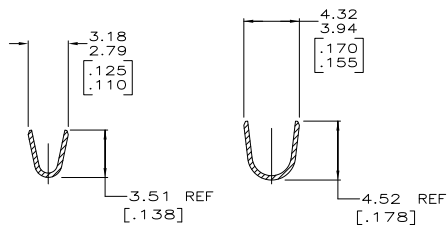
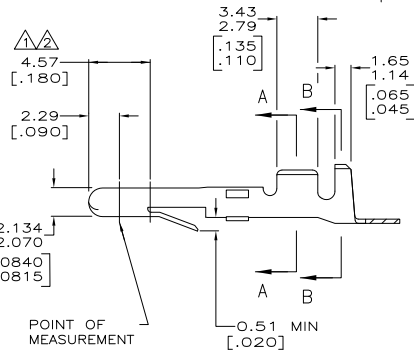


THIS DRAWING IS UNPUBLISHED.
© COPYRIGHT - By -
RELEASED FOR PUBLICATION
ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
CM	53	REV	DESCRIPTION	DATE	OWN
		AF1	REVISED PER ECO-11-004587	11MAR11	RK HMR



1. PLATE OVERALL WITH 0.00127 [.000050] MIN NICKEL, THEN TIP PLATE WITH 0.00076 [.000030] MIN GOLD IN THE MATING AREA.
2. PLATE OVERALL WITH 0.00127 [.000050] MIN NICKEL, THEN PLATE IN THE MATING AREA AND STRIPE THE INSIDE OF THE WIRE BARREL WITH 0.00076 [.000030] MIN GOLD.
3. WIRE RANGE: 0.5 - 2 mm² [20 - 14 AWG].
4. INSULATION RANGE: 3.30 [.130] MAX DIA.
5. APPLICATION TYPE: MINI.
6. DIMENSIONS IN BRACKETS ARE IN INCHES.

△	0.33 [.012] BRASS	61118-7
△	0.33 [.012] PH BRZ	61118-6
△	0.33 [.012] BRASS	61118-5
PRE-TIN	0.33 [.012] PH BRZ	61118-4
-	0.33 [.012] BRASS	61118-2
PRE-TIN	0.33 [.012] BRASS	61118-1
FINISH	MATERIAL	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		11-92-92	TE Connectivity	
DIMENSIONS: mm(INCHES)		11-92-92	PIN, MATE-N-LOK™	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		12-9-92	RESTRICTED TO	
D. PLUG		PRODUCT SPEC	SIZE	
F. PLUG		APPLICATION SPEC	CAGE CODE	
H. PLUG		WEIGHT	DRAWING NO	
I. PLUG		CUSTOMER DRAWING	A200779	
FINISH		SCALE	5:1	
SEE TABLE		SHEET	1 of 1	

METRIC