

PCB LAYOUT - COMPONENT VIEW

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR MATERIAL: PBT
FLAMMABILITY RATING :UL94-V0
COLOR: BLACK
CONTACT MATERIAL: COPPER ALLOY
CONTACT TYPE: STAMPED
CONTACT PLATING: GOLD
SHIELDING: BRONZE NI PLATED
QUALITY CLASS: 500 MATING CYCLES




ENVIRONMENTAL
OPERATING TEMPERATURE: -40 °C UP TO 85 °C
COMPLIANCE: LEAD FREE AND ROHS


ELECTRICAL
CURRENT RATING: 1.5 A
WORKING VOLTAGE: 120 VAC
INSULATION RESISTANCE: >500 MΩ
WITHSTANDING VOLTAGE: 1 000 VAC/MIN
CONTACT RESISTANCE: 20 mΩ MAX

STANDARD
CERTIFIED: E324776

SOLDERING
JEDEC LEAD FREE WAVE SOLDERING PROCESS

PACKAGING
TRAY

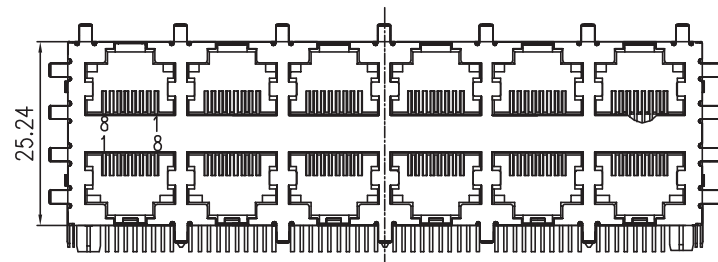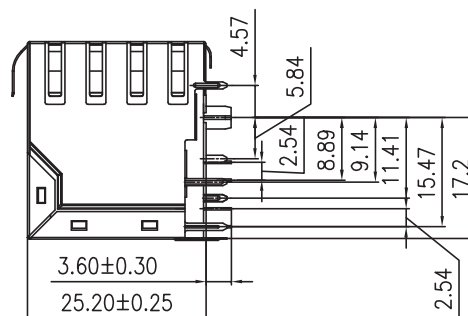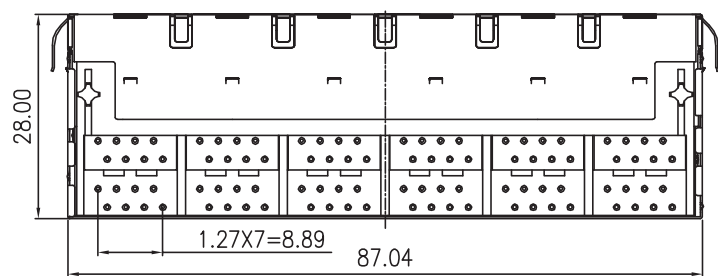

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = $\pm$ 0.2 .XX = $\pm$ 0.15	 DESCRIPTION: HORIZONTAL SHIELDED 2 x 6 STACKED PORT WITH EMI PANEL FINGER 8P8C MODULAR JACK TAB UP & DOWN WERI PART NO: 615 096 243 321		SIZE A4
G								
F								
E	18-JUL-14	CHARACTERISTICS	AS					
D	03-JAN-14	UL & TEMP UPDATE	QL	APPROVAL: RJ	UNIT: MM			
C	28-AUG-13	DWG UPDATE	QL		SCALE:			
B	28-MAY-10	DIM. 1.9MM	JP		SHEET: 1/1			
A	06-OCT-09	PDF	JP		DRAW:			
REV	DATE	FILE	BY					