
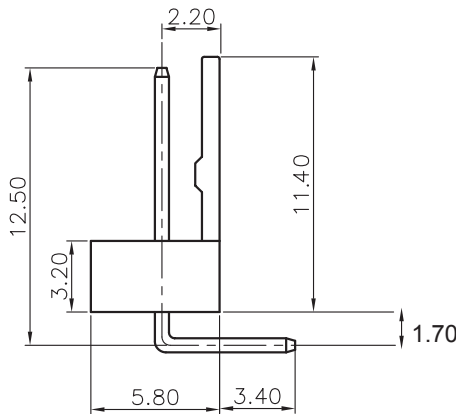
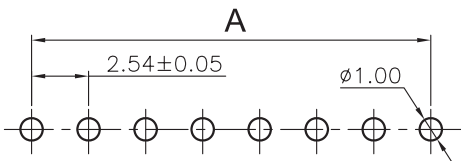
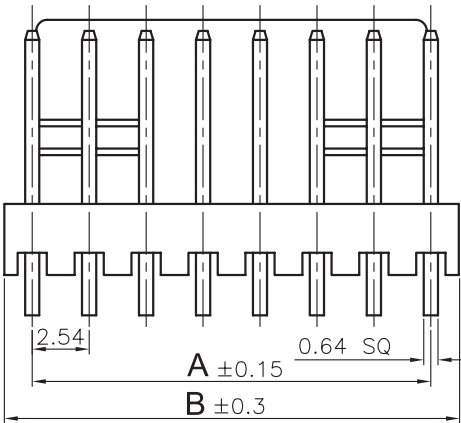


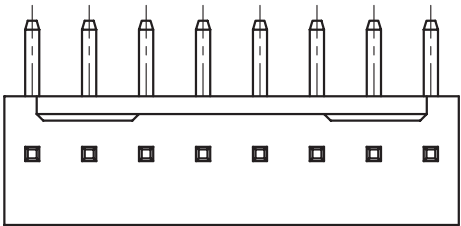

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: NYLON 66
FLAMABILITY RATING: UL94-V0
COLOR: BEIGE
CONTACT MATERIAL: COPPER ALLOY
CONTACT TYPE: STAMPED
CONTACT PLATING: TIN
QUALITY CLASS: 25 MATING CYCLES
PITCH: 2.54MM

ENVIRONMENTAL
OPERATING TEMPERATURE: -40 UP TO 105°C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
CURRENT RATING: 3A
WORKING VOLTAGE: 250V AC
INSULATOR RESISTANCE: >1000 MOHM
DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC/MN
CONTACT RESISTANCE: 20 mOHM MAX

STANDARD
CERTIFIED: E323964

SOLDERING
SOLDER TEMP.: JEDEC LEAD FREE WAVE SOLDERING

PACKAGING
BAG

DIMENSION
A = 2.54 x (NB. PIN - 1)
B = 2.54 x (NB. PIN) + 0.04

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15		DESCRIPTION: 2.54 MM MALE RIGHT ANGLED BOTTOM LOCKING HEADER	SIZE A4
G								
F								
E	06-AUG-13	CHARACTERISTIC	QL					
D	17-NOV-09	STANDARD	JP					
C	24-APR-07	ADD DIMENSION	EC	APPROVAL: RJ	UNIT: MM	WÜRTH ELEKTRONIK	WERI PART NO: 6190xx11021	
B	30-JAN-07	DRAW	EC		SCALE:			
A	28-FEB-06	PDF	JP		SHEET: 1/1			
REV	DATE	FILE	BY		DRAW: PEARL			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Wurth Electronics:](#)

[61900411021](#) [61900211021](#) [61900311021](#) [61900511021](#)