

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: PA 6T
FLAMABILITY RATING: UL94-V0
COLOR: BLACK
CONTACT MATERIAL: COPPER ALLOYS
CONTACT TYPE: STAMPED
CONTACT PLATING: GOLD
QUALITY CLASS: 3 AS PER CECC 75 301-802
PITCH: 1.27MM

ENVIRONMENTAL
OPERATING TEMPERATURE: -40 UP TO 125°C
COMPLIANCE: LEAD FREE AND ROHS



ELECTRICAL
CURRENT RATING: 1A MAX
WORKING VOLTAGE: 50V AC
INSULATOR RESISTANCE: >1000 MOHM
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/MN
CONTACT RESISTANCE: 20 mOHM MAX

STANDARD
CERTIFIED: E323964

SOLDERING
JEDEC LEAD FREE WAVE SOLDERING PROCESS

PACKAGING
BAG

DIMENSION
A = 1.27 x (NB. PIN / 2 - 1)
B = 1.27 x (NB. PIN / 2)

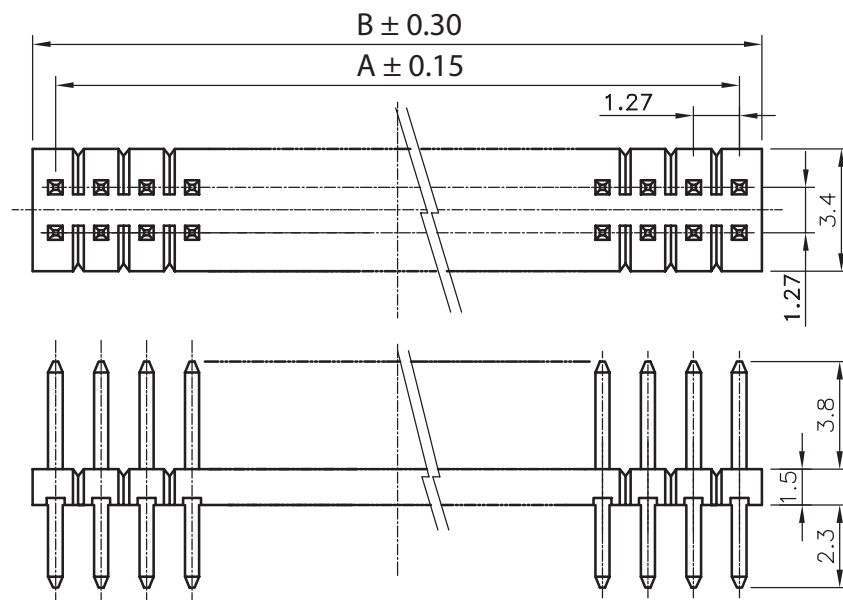

RoHS Compliant				PROJECTION:	GENERAL TOLERANCE .X = +/_ 0.2 .XX = +/_ 0.15		
G	19-FEB-14	SOLDERING	QL				
F	26-JUL-13	DIM A & B	QL				
E	24-OCT-11	SOLDERING	GG				
D	25-NOV-09	STANDARD	JP				
C	23-NOV-07	MODIFICATIONS	EC	APPROVAL: RJ	UNIT: MM	DESCRIPTION: 1.27MM DUAL PIN HEADER	SIZE A4
B	18-DEC-06	DRAW	EC		SCALE:		
A	08-JAN-02	PDF	JP		SHEET: 1/1	WERI PART NO: 622 0xx 211 21	
REV	DATE	FILE	BY		DRAW: PEARL		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Wurth Electronics:](#)

[62202021121](#) [62201021121](#) [62201421121](#) [62200421121](#) [62200821121](#) [62202821121](#) [62201621121](#)