
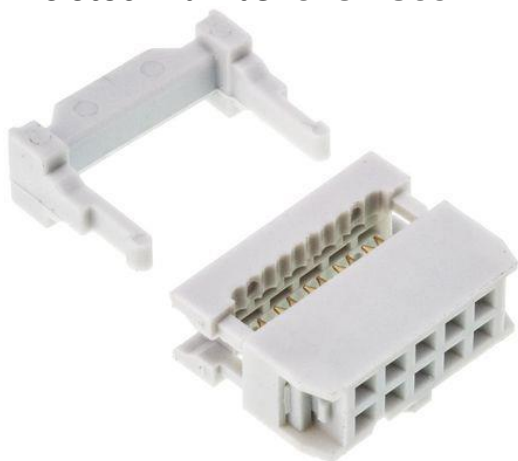


Datasheet

50 way IDC bump polarised socket, 1 A

RS Stock number 625-7369

Dimensions: (mm)

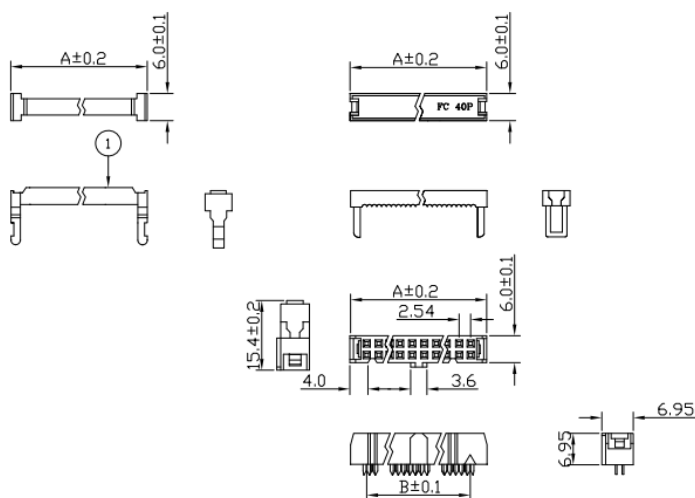

Specification

Housing: 30% Glass filled PBT UL94V-0. **COLOR:** GRAY

Contacts: Phosphor Bronze.

Plating: Selective gold plated: gold plated on mating area and nickel plated on wire cutting area.
Gold plated over nickel.

Cable: 1.27mm (0.050") pitch flat cable.

Electrical Characteristics:

Current Rating:1 AMP.

Insulator Resistance: 5000M Ω min. at DC 500V.

Contact Resistance: 20mΩmax. at DC 100mA.

Operating Temperature: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$.