

SPECIFICATION CONTROL DRAWING

62A6002TITLE CABLE, ELECTRIC, TIN-COATED COPPER STRAND WIRE,
MODIFIED POLYESTER INSULATED


Date 1-14-98

Revision C

This specification sheet forms a part of the latest issue of Raychem Specification 62.

STRANDED WIRE - TIN-COATED COPPER

INSULATION - MODIFIED POLYESTER

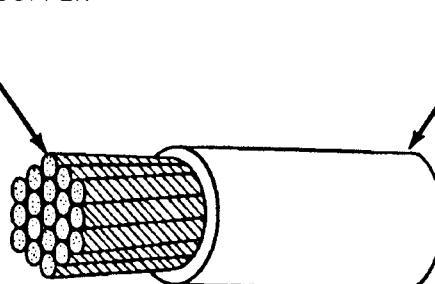

CONSTRUCTION DETAILS						
PART NUMBER	STRANDED WIRE				FINISHED CABLE	
	SIZE (AWG)	STRANDING (number x AWG)	MAXIMUM DIAMETER (in.)	MAXIMUM RESISTANCE AT 20°C (ohms/1000 ft.)	DIAMETER (in.)	NOMINAL WEIGHT (lbs/1000 ft.)
62A6002-22-*	22	154 x 44	.033	18.8	.047 ± .002	2.8

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE INDEX: 3000 hours (minimum)
at 150°C

VOLTAGE RATING: 600 volts (rms)

CONCENTRICITY: 70% (minimum)

FLAMMABILITY: 70 seconds (maximum) afterburn

INSULATION ELONGATION AND TENSILE STRENGTH:

Elongation, 250% (minimum)

Tensile Strength, 4000 lbf/in² (minimum)

INSULATION CONTINUITY PROOF TEST:

Impulse Dielectric Test, 8.0 kV (peak)

INSULATION THICKNESS: .008 inch (nominal)

SHRINKAGE: .050 inch (maximum)

THERMAL STABILITY: 165°C for 168 hours,
80% (minimum) retention of Tensile Strength,
50% (minimum) retention of Elongation

PART NUMBER:

The "*" in the part number shall be replaced
by a color code designator per Spec. 62.

Example: White insulation: 62A6002-22-9

COLORS SHALL BE IN ACCORDANCE WITH SAE J1128

DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL.

Page 1 of 1

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

RaychemRaychem Corporation
300 Constitution Drive, Menlo Park, California 94025
1-800-2 Raychem Fax: 1-650-381-6297

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[62A6002-22-0](#) [62A6002-22-9](#) [62A6002-22-2](#) [62A6002-22-3](#)