



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.



LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AF	50	R	REVISED PER ECR-12-013518	23NOV12	KH PD

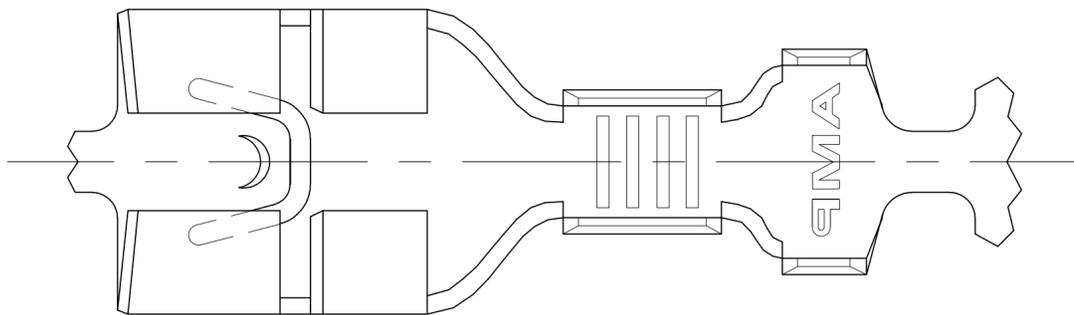


- 1 CONTINUOUS STRIP ON REELS
- △1 ACCEPTS #18-#14 AWG WIRE SIZE
- 3 INSULATION RANGE IS .120-.170 DIA
- 4 MATING TAB THK IS .032±.001.
- △5 REELED WITH INTERLEAVING PAPER
- △6 PRELIMINARY - NOT FOR PRODUCTION



SECTION C-C

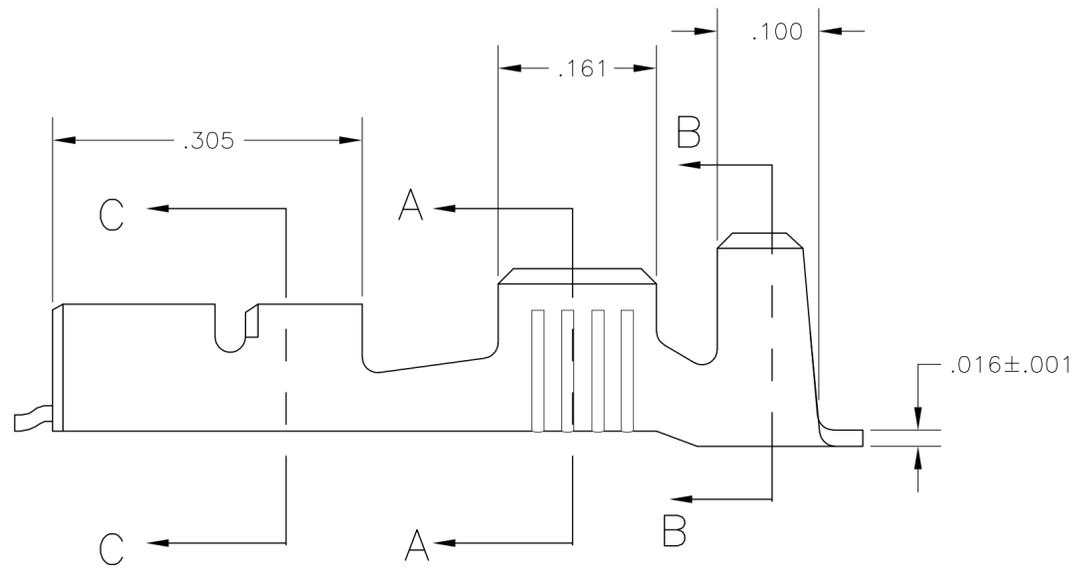

SECTION A-A

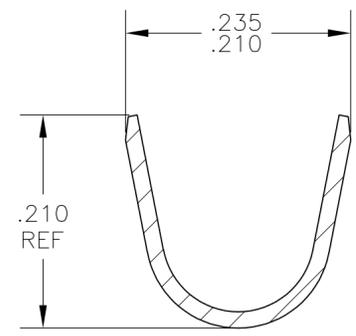

SECTION B-B

OBSOLETE	△5 STANDARD	.000080 MIN TIN	△6 1-63306-0
	REVERSE	-	63306-3
	STANDARD	TIN	63306-2
	STANDARD	-	63306-1
	REELING	FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	JR RUTH	20JUN02	TE TE Connectivity
CHK	P DESANTIS	20JUN02	
APVD	P DESANTIS	20JUN02	
PRODUCT SPEC	NAME		
APPLICATION SPEC			RECEPTACLE, FASTON, .250 SERIES
MATERIAL	BRASS	FINISH	SEE TABLE
WEIGHT	-	SCALE	A2 00779 C=63306
CUSTOMER DRAWING	SCALE	8:1	SHEET 1 of 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[63306-2](#)