
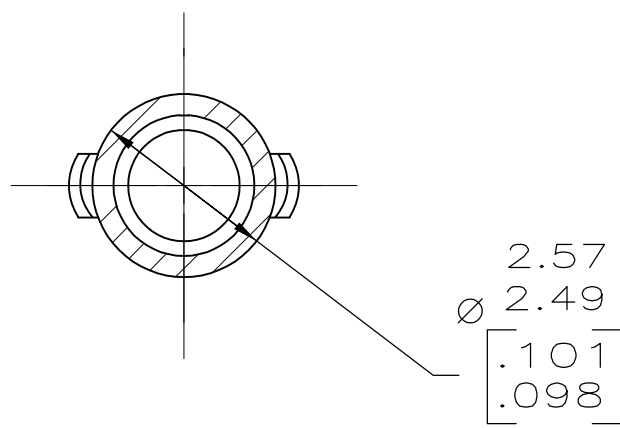
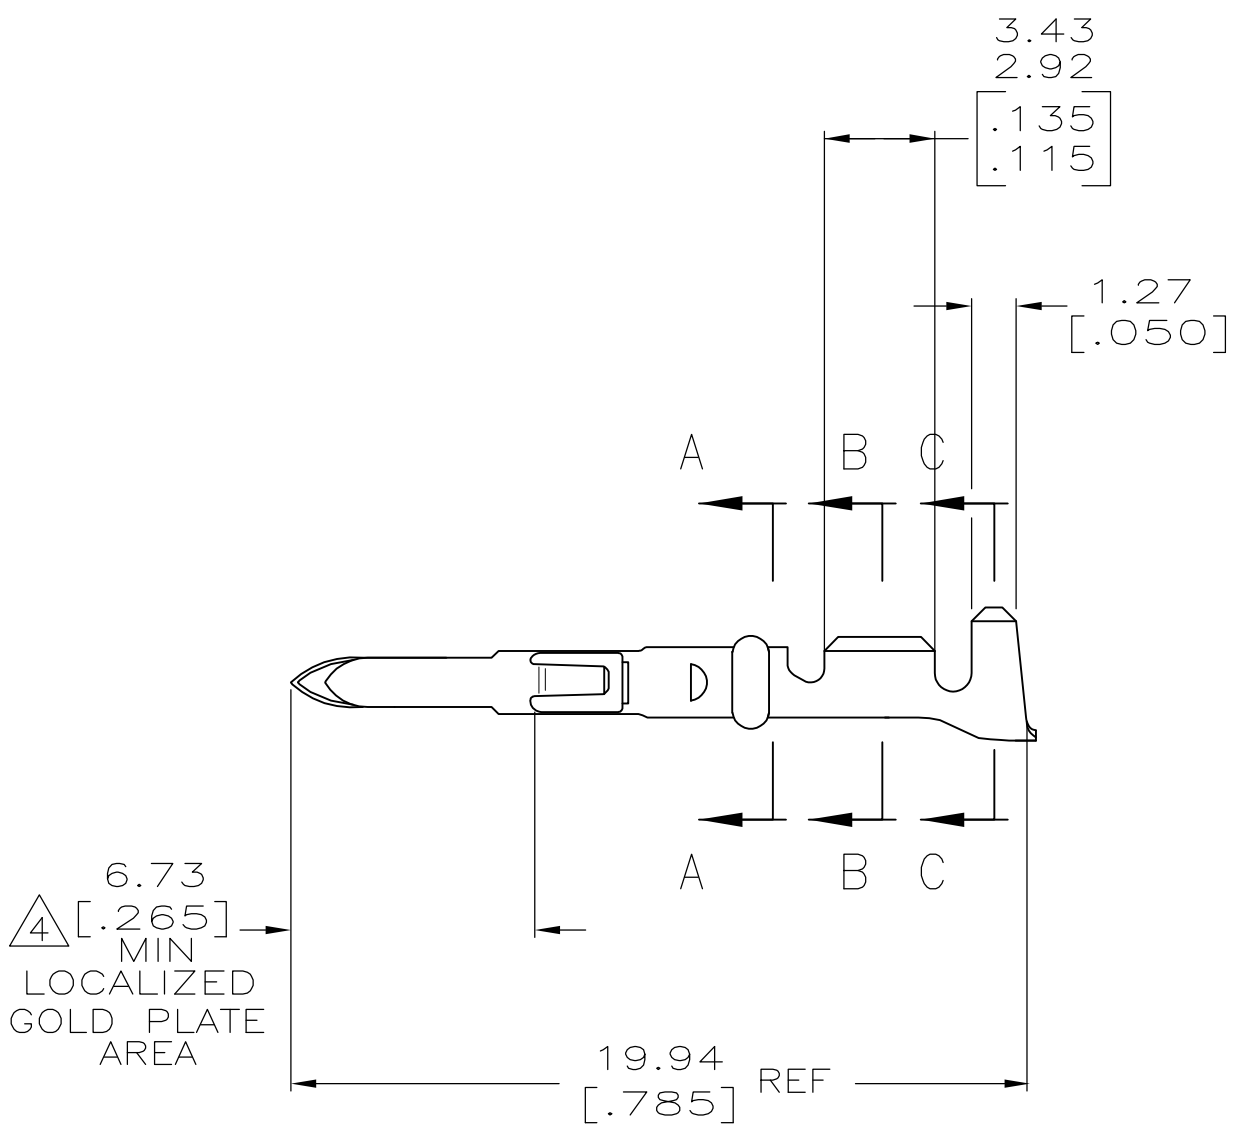
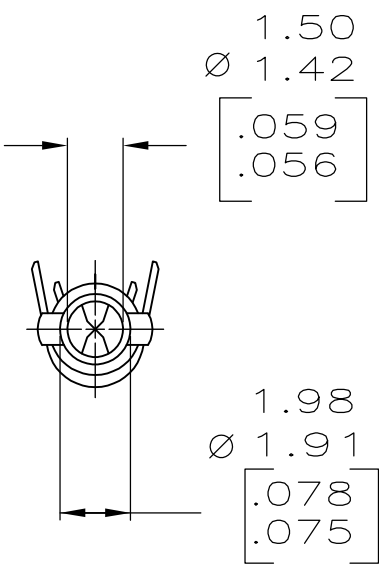



LOC		DIST		REVISIONS					
CM	52	P	LTR	DESCRIPTION		DATE	DWN	APVD	
		C1		REVISED PER ECO-11-004820		11MAR11	RK	HMR	

- 1 WIRE RANGE: 0.12–0.9mm² (26–18 AWG).
- 2 INSULATION RANGE: 1.27–2.92 [.050–.115] MAX. DIA.
- 3 DIMENSIONS IN BRACKETS ARE IN INCHES.
- 4


TIP PLATE WITH 0.00076–0.00091 [.000030–.000036] MIN GOLD IN THE LOCALIZED GOLD PLATE AREA OVER 0.00127 [.000050] MIN NICKEL UNDERPLATE.

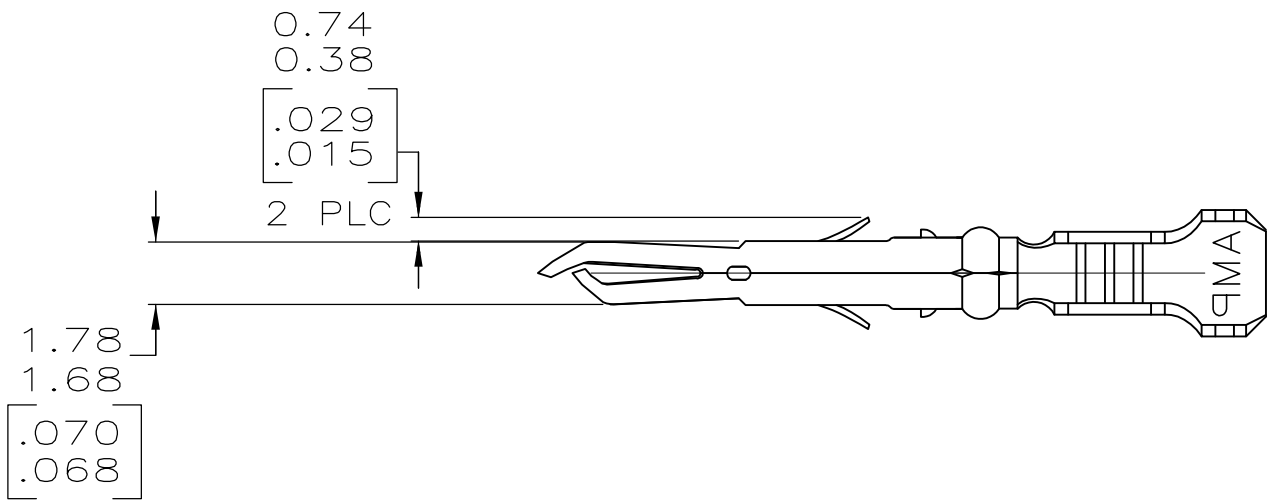


SECTION A–A
SCALE 10:1

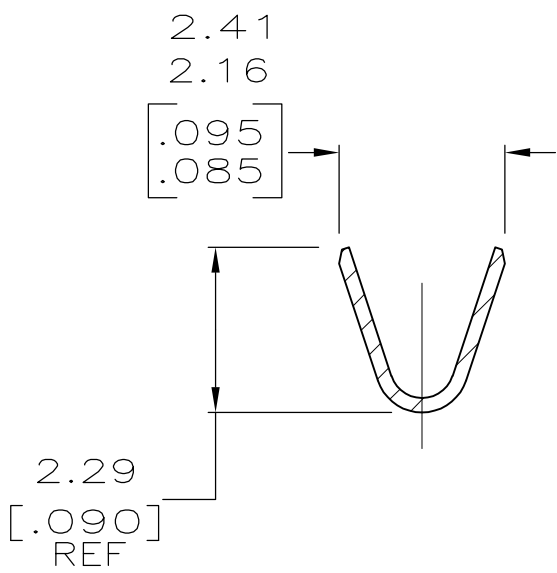

SECTION B–B
SCALE 10:1

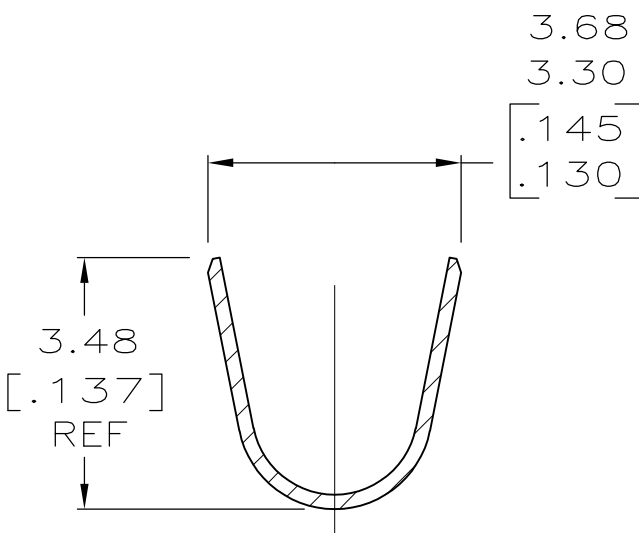

SECTION C–C
SCALE 10:1

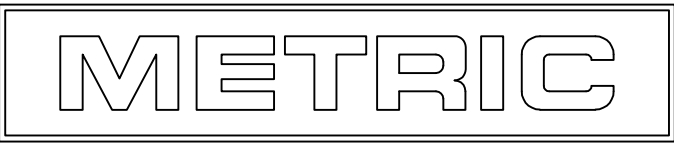

4 GOLD PLATE	0.20 [.008] PHOS BRZ	640545–2
PRE–TIN	0.20 [.008] PHOS BRZ	640545–1
FINISH	MATERIAL	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. SALMON	3–21–95	STE TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK R. SWING	3–21–95		
	TOLERANCES, UNLESS OTHERWISE SPECIFIED: 0 PLC ± – 1 PLC ± – 2 PLC ± – 3 PLC ± 0.13 [.005] 4 PLC ± – ANGLES ± –	APVD W. LONG		NAME PIN, LOOSE PIECE, MR	
		PRODUCT SPEC		–	
		APPLICATION SPEC		–	
		WEIGHT		–	
MATERIAL SEE TABLE	FINISH SEE TABLE	CUSTOMER DRAWING		SIZE A1	CAGE CODE 00779
		DRAWING NO C=640545		RESTRICTED TO –	
		SCALE 5:1		SHEET 1	OF 1
				REV C1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[640545-1](#)