

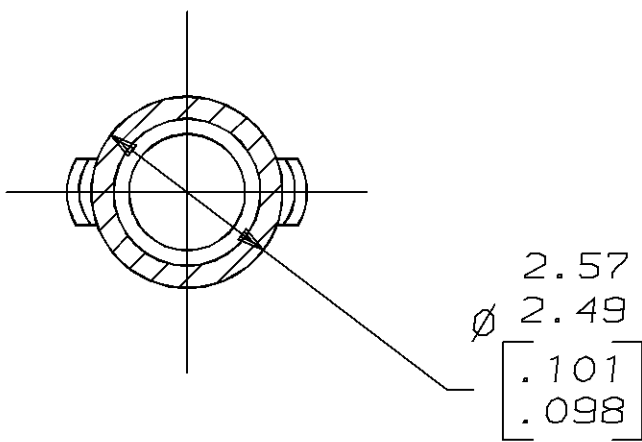
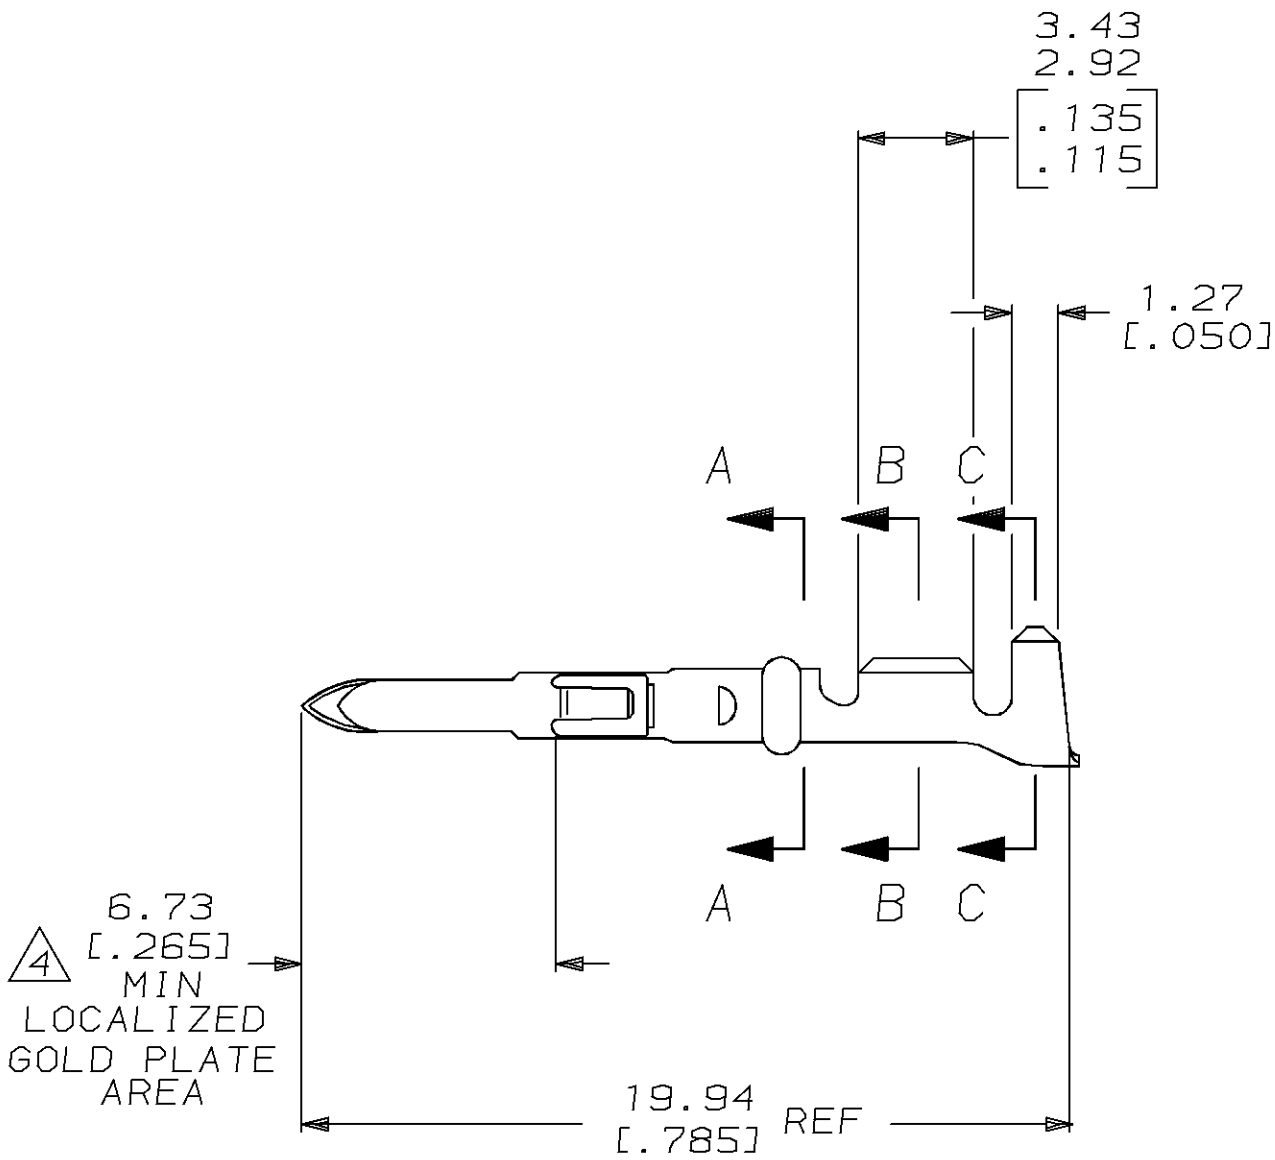
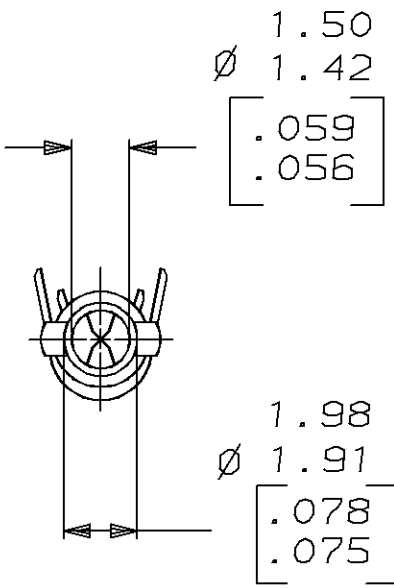


LOC		DIST		P		F		ZONE		LTR		REVISIONS		DATE		APPD	
CM		52										C	REV & REDWN PER EC 0730-0059-95	3-21-95		KS	RS


- 1 WIRE RANGE: 0.12-0.9mm² (26-18 AWG).
- 2 INSULATION RANGE: 1.27-2.92 [.050-.115] MAX. DIA.
- 3 DIMENSIONS IN BRACKETS ARE IN INCHES.
- △ TIP PLATE WITH 0.00076-0.00091 [.000030-.000036] MIN GOLD IN THE LOCALIZED GOLD PLATE AREA OVER 0.00127 [.000050] MIN NICKEL UNDERPLATE.

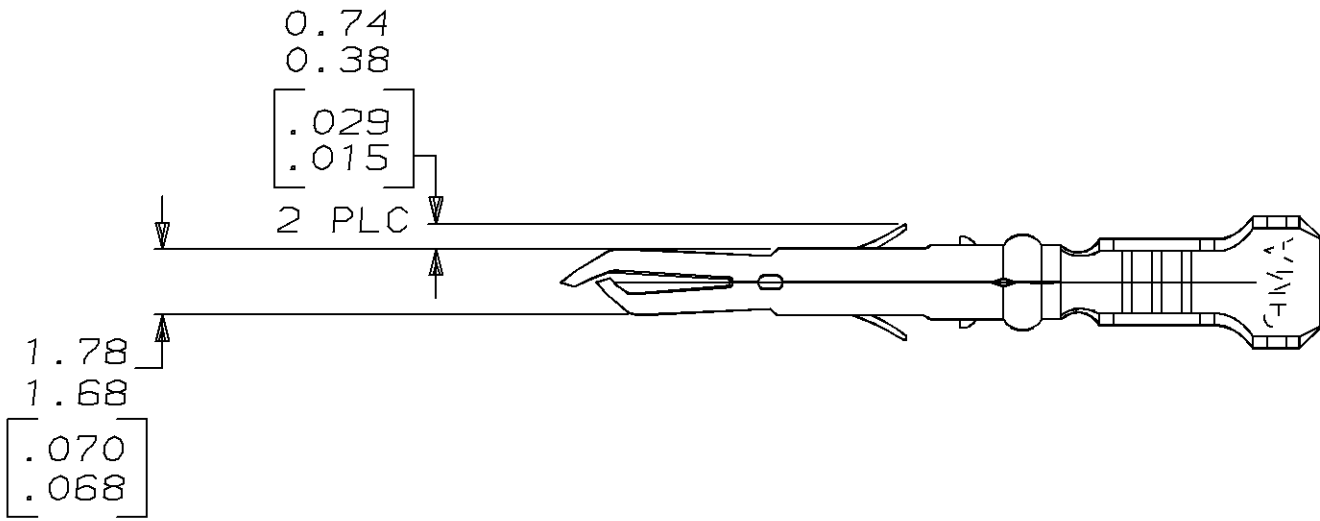

SECTION A-A
SCALE 10:1

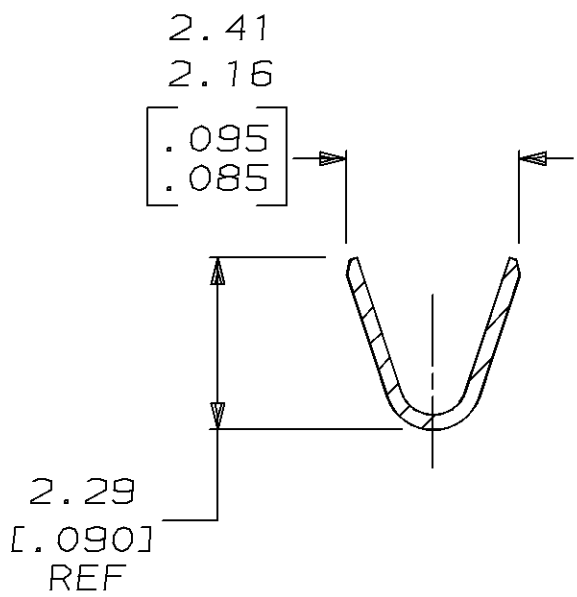

SECTION B-B
SCALE 10:1

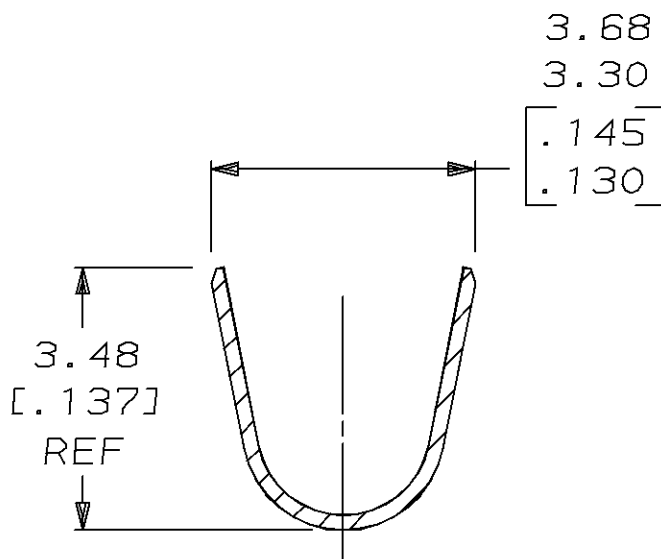

SECTION C-C
SCALE 10:1

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

△ GOLD PLATE		0.20 [.008] PHOS BRZ	640545-2
PRE-TIN		0.20 [.008] PHOS BRZ	640545-1
FINISH		MATERIAL	PART NO
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES: ON: 2 PLC DEC ±0.13 [.005] 3 PLC DEC ±- ANGLES ± -		DR 3-21-95 K. SALMON CHK 3-21-95 R. SWING APPD 3-21-95 W. LONG MATERIAL	NAME
SEE TABLE		APPD 3-21-95 W. LONG PRODUCT SPEC -	PIN, LOOSE PIECE, MR
FINISH		APPLICATION SPEC -	SIZE D
SEE TABLE		WEIGHT -	CAGE CODE 00779
			DRAWING NO C-640545
			SHEET 1 OF 1

CUSTOMER DRAWING