
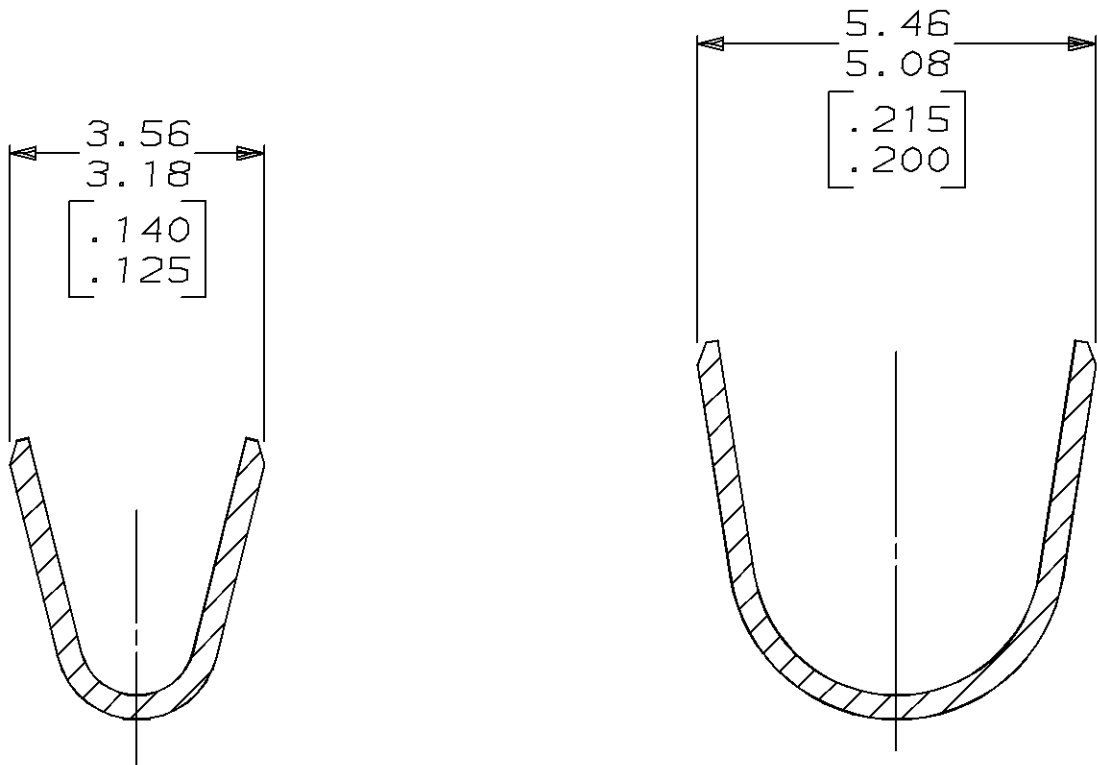
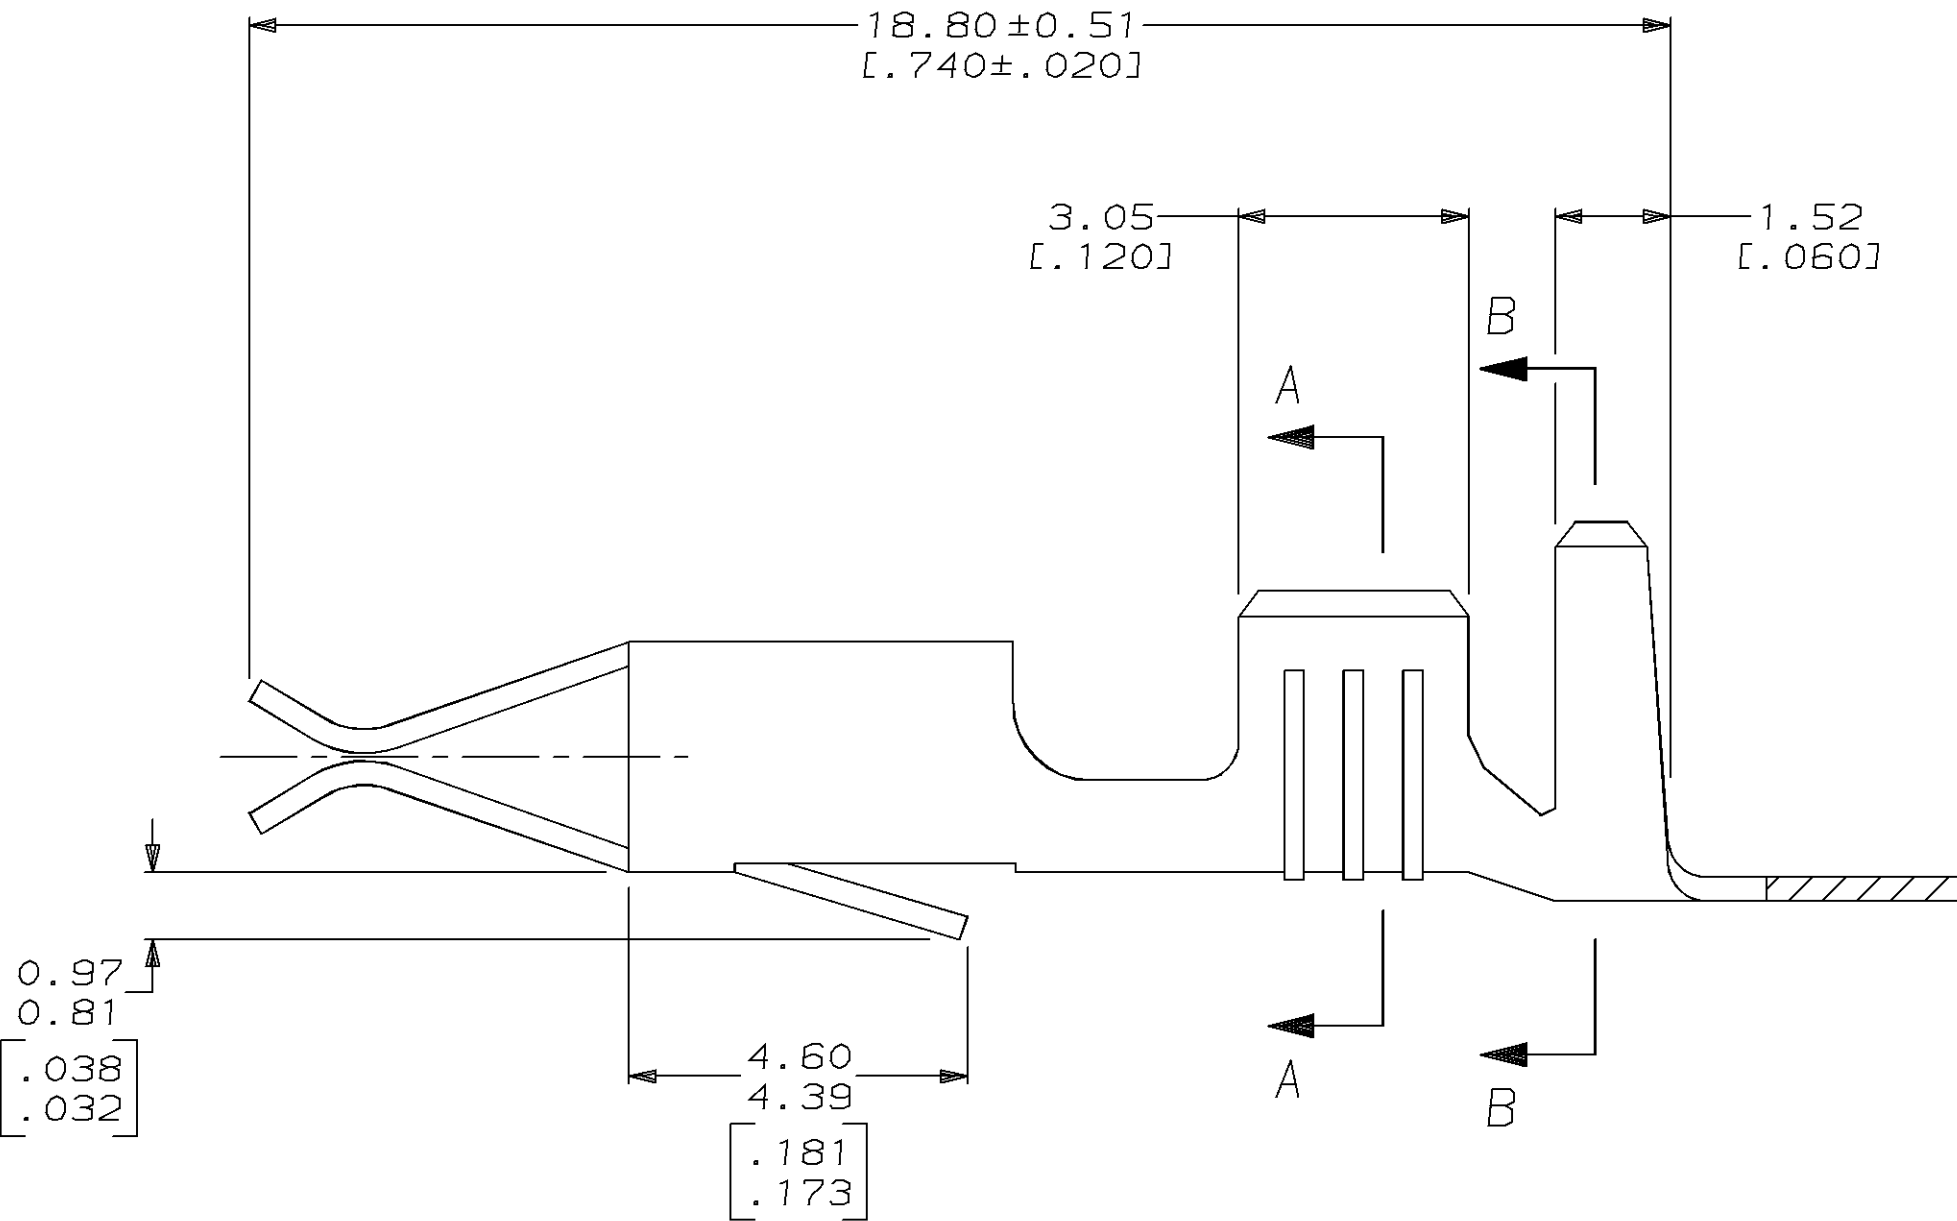


LOC		DIST		P		F		ZONE		LTR		REVISIONS		DATE		APPD	
AF		50								G		REV PER 0710-0427-95		27/SEP/95		PF	
																DS	

1. THIS IS THE DOMESTIC VERSION OF THE GERMAN PART NO. 925595.
2. WIRE RANGE: 0.8 - 2 mm² [18 - 14 AWG].
3. INSULATION RANGE: 3.05 - 4.32 [.120 - .170] DIA.
4. DIMENSIONS IN BRACKETS ARE IN INCHES.

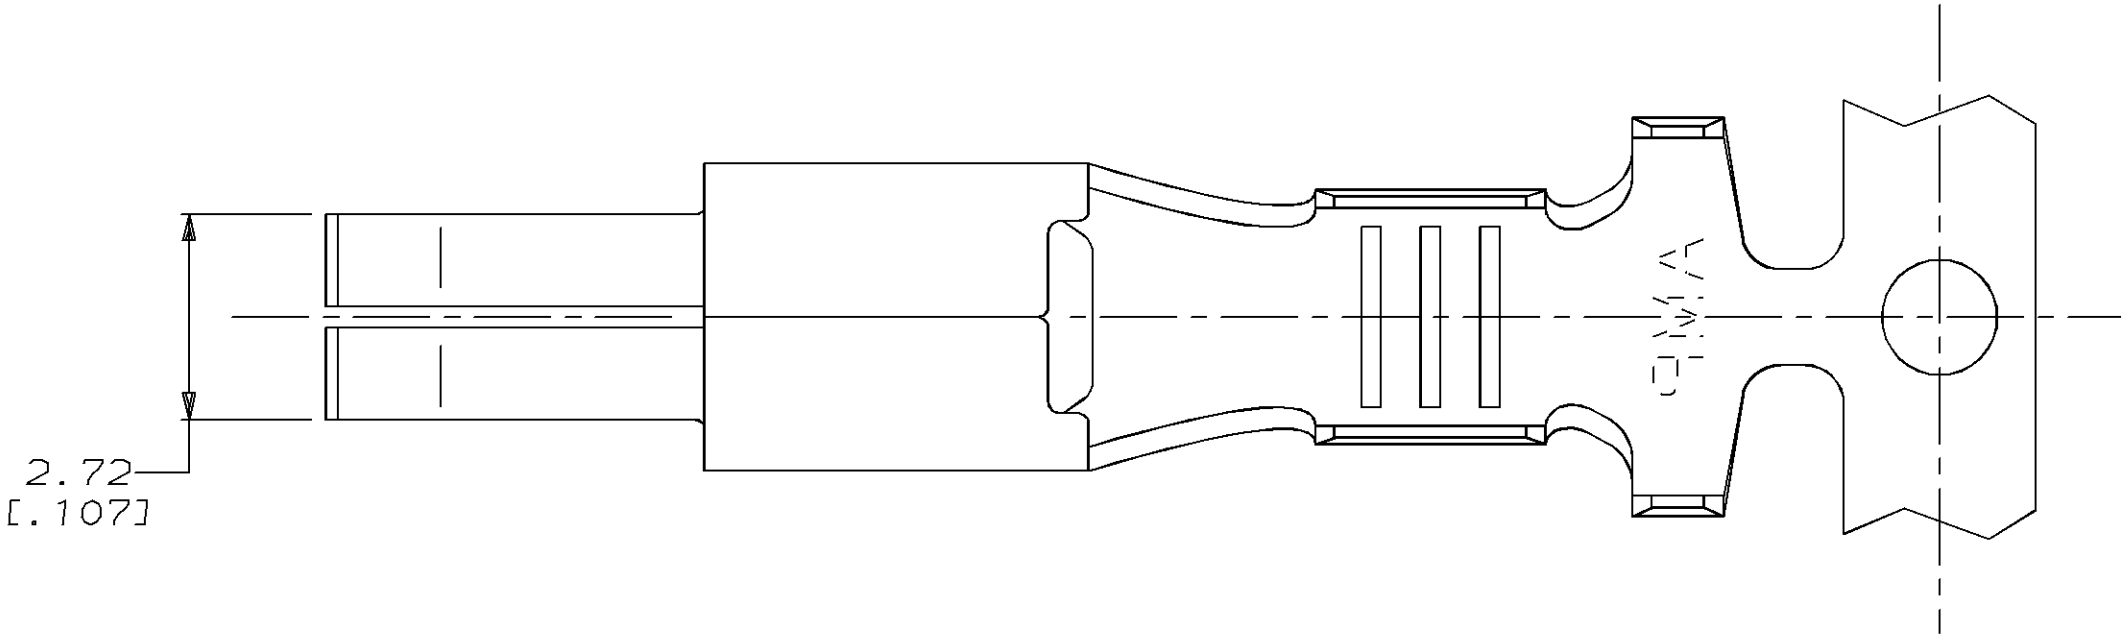

SECTION A-A

SECTION B-B

PRE-TIN		0.30 [.012] PH BRZ		643221-2	
PRE-TIN		0.30 [.012] BRASS		643221-1	
FINISH		MATERIAL		PART NO	
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON : 2 PLC DEC ±0.13 [.005] 3 PLC DEC ±- ANGLES ± -		DR 4-12-93 T. BECK CHK 4-12-93 R. SWING APPD 10-6-93 G. MARTIN APPD 10-6-93 G. MARTIN PRODUCT SPEC -		NAME RECEPTACLE, MINI-SPRING	
SEE TABLE		APPLICATION SPEC -		SIZE C	CAGE CODE 00779
SEE TABLE		WEIGHT -		DRAWING NO C=643221	
		SCALE 10:1		SHEET 1 OF 1	

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.