


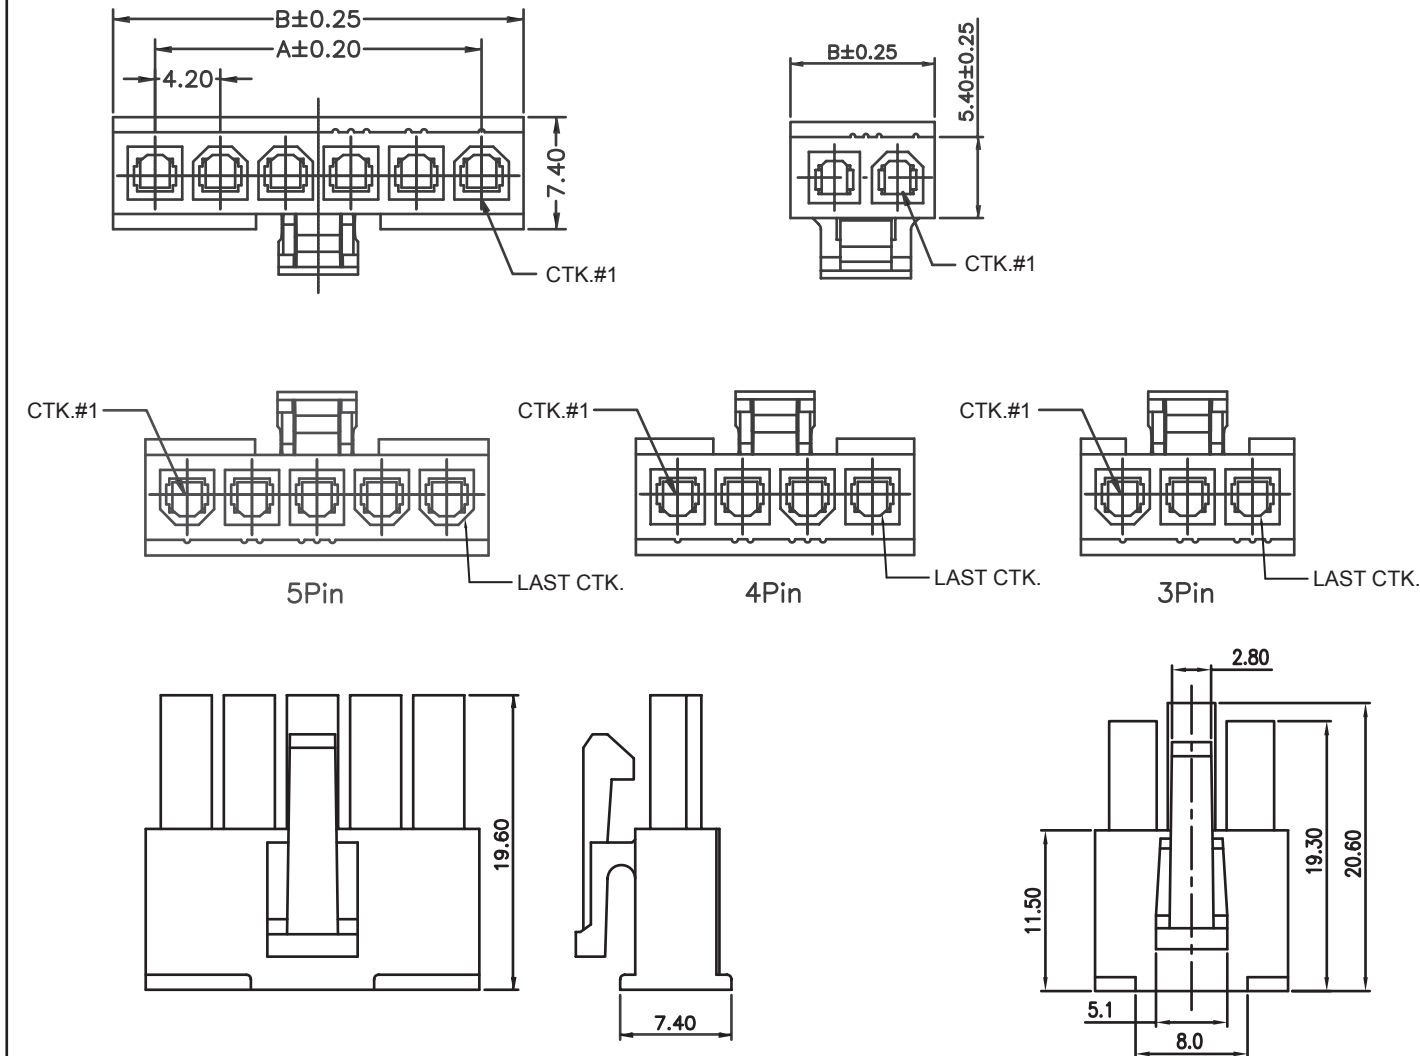

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: NYLON 66
FLAMABILITY RATING: UL94-V0
COLOR: WHITE
PITCH: 4.20MM

ENVIRONMENTAL
OPERATING TEMPERATURE: -40 UP TO 105°C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
CURRENT RATING: 8 TO 9A


NB CIRCUITS	2-3	4-5
AMPERES	9	8

WORKING VOLTAGE: 600V AC
INSULATOR RESISTANCE: >1000 MOHM
DIELECTRIC WITHSTANDING VOLTAGE: 1500V AC/MN

STANDARD
 CERTIFIED: E323964 / MODEL NUMBER 649-0133

PACKAGING
TRAY

DIMENSION
A = 4.20 x (NB. PIN - 1)
B = 4.20 x (NB. PIN) + 1.20

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = $\pm$ 0.2 .XX = $\pm$ 0.15	 WÜRTH ELEKTRONIK		
J	26-SEP-14	DRAWING	AS	APPROVAL: RJ	UNIT: MM	DESCRIPTION: 4.20MM FEMALE SINGLE ROW RECEPTACLE		SIZE A4
I	12-MAR-14	TPK	QL		SCALE:			
H	08-NOV-11	DRAWING	GG		SHEET: 1/2	WERI PART NO: 649 0xx 013 322		
REV	DATE	FILE	BY		DRAW: AS			

1

2

3

4

5

A

B

C

D



Note:

1.Dimension:


Carton Size:40*28*28(cm)

2.Quantity:


Pin.	Pcs/Bag	Pcs/Carton
2	200	12000
3	200	9000
4	200	8000
5	100	7000

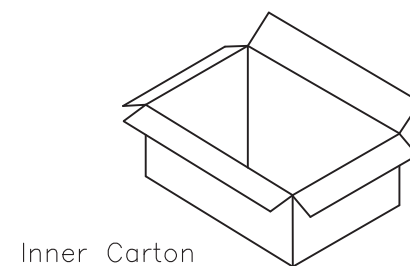


Inner Carton



Carton

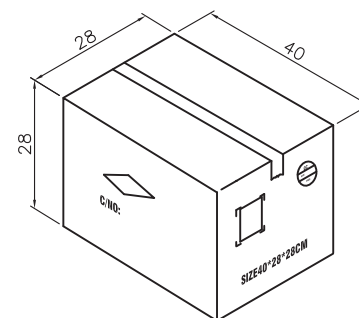

RoHS Compliant							
G				PROJECTION: 	GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15	 WÜRTH ELEKTRONIK	
F							
E							
D							
C				APPROVAL: BBu	UNIT: MM	DESCRIPTION: 4.20MM FEMALE SINGLE ROW RECEPTACLE	SIZE A4
B					SCALE:		
A					SHEET: 2/3		
REV	DATE	FILE	BY		DRAW: AS	WERI PART NO: 6490 xx 013322_TPK	

[illegible]