

Multi-Turn Trimmer

Model 64



Features:

- 1/4" square
- Cermet



Electrical

Standard Resistance Range, Ohms	10 to 1Meg
Standard Resistance Tolerance	±10%
Input Voltage, Maximum	200Vdc or rms not to exceed power rating
Slider Current, Maximum	100mA or within rated power, whichever is less
Power Rating, Watts	0.25 at 85°C derating to 0 at 150°C
End Resistance, Maximum	2 Ohms
Actual Electrical Travel, Turns, Nominal	12
Dielectric Strength	900Vrms
Insulation Resistance, Minimum	1,000 Megohms
Resolution	Essentially infinite
Contact Resistance Variation, Maximum	1% or 1 Ohms, whichever is greater

Environmental

Seal	85°C Fluorinert® (No Leaks)
Temperature Coefficient, Maximum	±100ppm/°C
Operating Temperature Range	-65°C to +150°C
Thermal Shock	5 cycles, -65°C to +150°C (1% ΔRT, 1% ΔVR)
Moisture Resistance	Ten 24 hour cycles (1% ΔRT, IR 1,000 Megohms Min.)
Shock, 6ms Sawtooth	100G's (1% ΔRT, 1% ΔVR)
Vibration	20G's, 10 to 2,000 Hz (1% ΔRT, 1% ΔVR)
High Temperature Exposure	250 hours at 125°C (2% ΔRT, 2% ΔVR)
Rotational Life	200 cycles (2% ΔRT)
Load Life at 0.25 Watts	1,000 hours at 85°C (2% ΔRT)
Resistance to Solder Heat	260°C for 10 sec. (1% ΔRT)

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | BI Technologies
4200 Bonita Place, Fullerton, CA USA 92835-1053 | Ph: +1 714-447-2300
www.ttelectronics.com | sensors@ttelectronics.com

Multi-Turn Trimmer

Model 64



Mechanical

Mechanical Stops	Clutch action, both ends
Torque, Starting Maximum	3 oz.-in. (0.021 N-m)
Weight, Nominal	.014 oz. (0.40 grams)

Packaging Information


Standard: Tubes
All units oriented with #1 pin to same side.

	Pin Style		P,W,Y	X,Z
Magazine	Width	=	0.38" (9.65 mm)	0.38" (9.65 mm)
	Height	=	0.62" (15.75mm)	0.62" (15.75mm)
	Length	=	14.5" (368 mm)	16.9" (429 mm)
	Capacity	=	50 Units	50 Units

Option: Tape & Reel, Ammo Pack (Available only for 64Y and 64Z)
All units oriented with #1 pin to the right of the direction of feed.

	Seat Plane to Centerline of Sprocket Hole	=	.71" (18 mm)
Tape	Width	=	18 mm
	Sprocket	=	Single Hole .50" spacing
	Capacity	=	1,000 Units
Reel	Diameter	=	14" (363 mm)
Ammo	Tape Fold	=	12"
	Box	=	1.8" x 13" x 10" (46mm x 330mm x 254mm)

Ordering Information

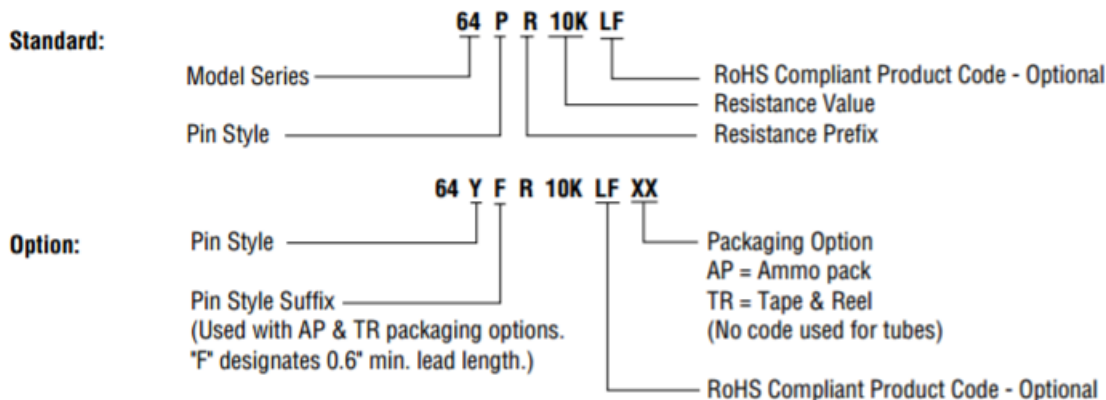

General Note


TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | BI Technologies
4200 Bonita Place, Fullerton, CA USA 92835-1053 | Ph: +1 714-447-2300
www.ttelectronics.com | sensors@ttelectronics.com

Outline Drawings


TOP ADJUSTMENT (Inch/mm)

Model 64W and 64Y

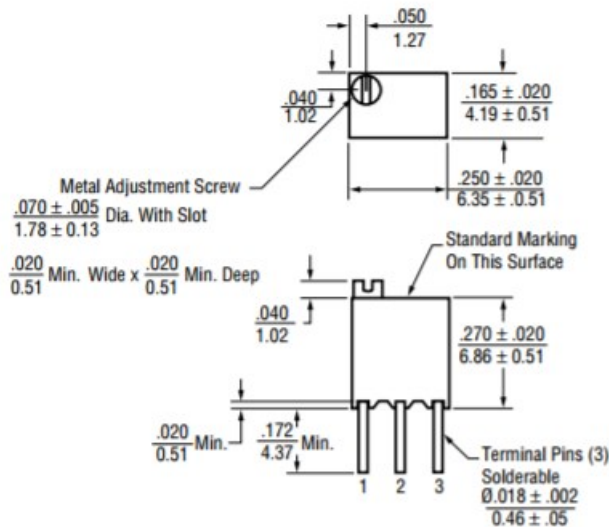


Note: Model 64W dimensions applicable to all models except as noted.

Model 64W




Model 64Y




SIDE ADJUSTMENT (Inch/mm)


Model 64X and 64Z

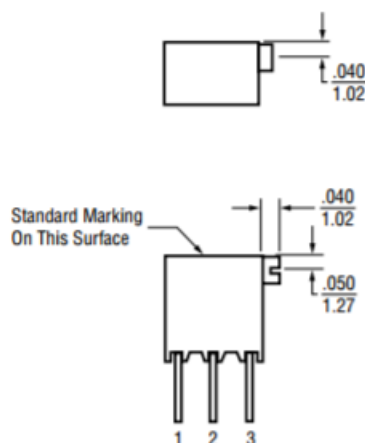

Model 64Z



Model 64X




General Note


TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

Outline Drawings

Model 64P

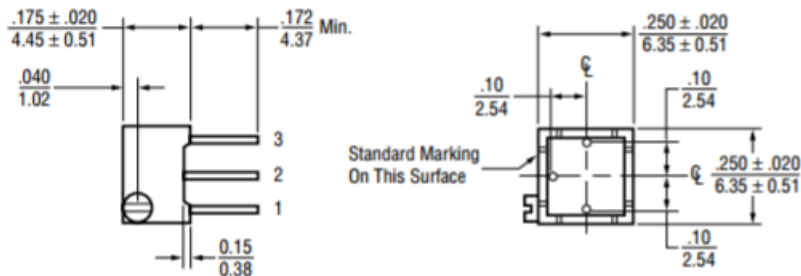

Circuit Diagram



NOTES

Metric equivalents, based on 1 inch = 25.4mm are rounded to the same number of significant figures as in the original. English units and are provided for general information only.

Tolerances unless otherwise specified:
Linear = $\pm .01$ inches (.25mm)
Angular = ± 2 degrees

DIMENSIONS
INCH
MM

THIRD ANGLE PROJECTION

Standard Resistance Values

10	100	1K	10K	50K	250K
20	200	2K	20K	100K	500K
50	500	5K	25K	200K	1Meg

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TT Electronics:

[64WR100KLF](#) [64WR200KLF](#) [64WR20KLF](#) [64PR10KLF](#) [64WR10KLF](#) [64YR2K](#) [64PR100LF](#) [64PR100KLF](#)
[64PR1KLF](#) [64PR20LF](#) [64PR200LF](#) [64PR20KLF](#) [64PR250KLF](#) [64PR50LF](#) [64PR500LF](#) [64PR50KLF](#) [64PR5KLF](#)
[64WR1MEGLF](#) [64YR100KLF](#) [64YR10KLF](#) [64YR200KLF](#) [64YR20KLF](#) [64YR2KLF](#) [64YR500LF](#) [64YR50KLF](#)
[64YR5KLF](#) [64ZFR200LFTR](#) [64ZR20KLF](#) [64ZR200LFTR](#) [64ZR200LF](#) [64YR1KLF](#) [64WR20LF](#) [64XR50KLF](#)
[64WR10LF](#) [64WR2MLF](#) [64WR1KLF](#) [64XR200KLF](#) [64WR200LF](#) [64WR2KLF](#) [64XR500LF](#) [64XR250KLF](#)
[64WR250KLF](#) [64WR50KLF](#) [64XR200LF](#) [64WR25KLF](#) [64WR100LF](#) [64WR500LF](#) [64WR50LF](#) [64XR20KLF](#)
[64XR50LF](#) [64XR1KLF](#) [64XR2MLF](#) [64XR1MLF](#) [64XR10KLF](#) [64XR500KLF](#) [64WR500KLF](#) [64XR2KLF](#) [64XR100LF](#)
[64XR20LF](#) [64XR25KLF](#) [64XR100KLF](#) [64XR10LF](#) [64WR5KLF](#) [64XR5KLF](#) [64ZR1KLF](#) [64PR1MEGLF](#)
[64YFR50KLFAP](#) [64YR250KLF](#) [64ZR50KLF](#) [64PR200KLF](#) [64ZR50LF](#) [64YR500KLF](#) [64PR500KLF](#) [64ZR20LF](#)
[64YR10LF](#) [64YR25KLF](#) [64YFR20LFTR](#) [64ZR500KLF](#) [64YR20LF](#) [64ZR100LF](#) [64YFR2KLFTR](#) [64YR50LF](#)
[64ZR5KLF](#) [64YR200LF](#) [64YFR5KLFTR](#) [64ZR2KLF](#) [64ZR250KLF](#) [64ZR200KLF](#) [64ZR10KLF](#) [64ZR10LF](#) [64PR10LF](#)
[64PR25KLF](#) [64YR100LF](#) [64PR2KLF](#) [64ZR500LF](#) [64ZR25KLF](#) [64YR1MEGLF](#) [64ZR100KLF](#) [64ZR1MEGLF](#)
[64WR2MEGLF](#)