


3/8" Square (10mm) Multi-Turn Cermet Trimmer



FEATURES



- Industrial Grade
- 0.5 Watt at 70°C
- CECC 41 100
- MIL-R-22097
- Good stability
- Contact resistance variation < 1% typical
- Meets MIL-R-22097 specifications

The Model 64 is a small size trimmer - 3/8" x 3/8" x 3/16" - answering PC board mounting requirements. Five versions are available which differ by the position of the control screw in relation to the PC board plane and by the spacing of the terminals. Excellent operational stability is provided by the use of a cermet element.



DIMENSIONS in millimeters

Terminal Spacing on a 2.54 PCB



64X

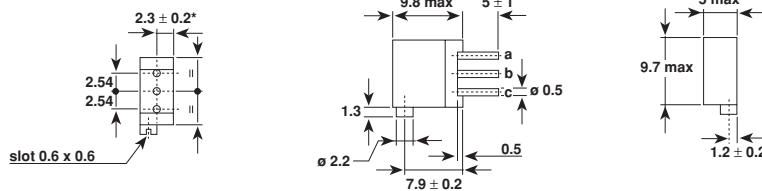



64Z

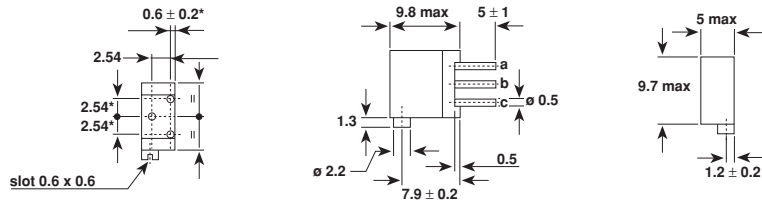



64W

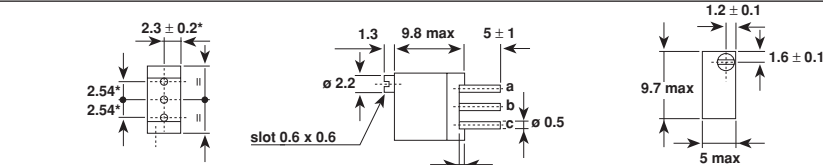


64Y

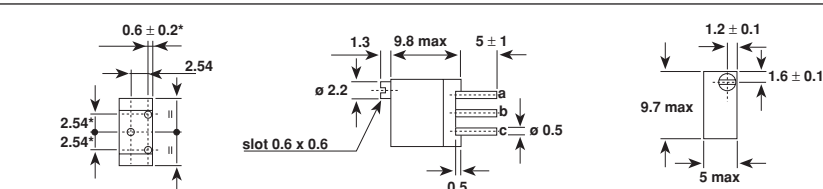

64P

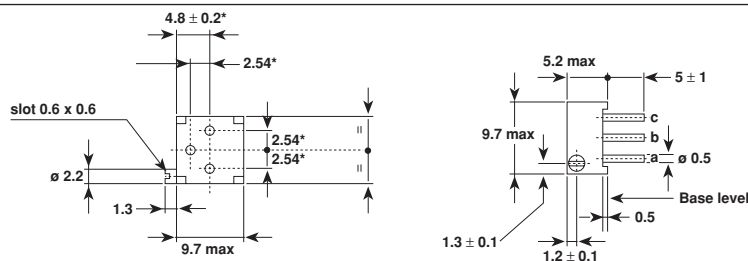

CIRCUIT DIAGRAM



*to be measured at base level



3/8" Square (10mm) Multi-Turn Cermet Trimmer

Vishay Spectrol

ELECTRICAL SPECIFICATIONS

Resistive Element	cermet	
Electrical Travel	19 turns $\pm$ 2	
Resistance Range	10 Ω to 2.2M Ω	
Standard series E3	1 - 2 - 2.5 - 5	
Tolerance	Standard	$\pm$ 10%
	On Request	$\pm$ 5%
Power Rating	Linear	0.5W at + 70°C
	Logarithmic	not applicable
Temperature Coefficient	See Standard Resistance Element Table	
Limiting Element Voltage (Linear Law)	250V	
Contact Resistance Variation	2% Rn or 2 Ω	
End Resistance (Typical)	1 Ω	
Dielectric Strength (RMS)	1000V	
Insulation Resistance (500VDC)	10 ⁶ M Ω	


MECHANICAL SPECIFICATIONS

Mechanical Travel	22 turns $\pm$ 5
Operating Torque (max. Ncm)	1.5
End Stop Torque	clutch action
Unit Weight (max. g)	1.2

ENVIRONMENTAL SPECIFICATIONS

Temperature Range	- 55°C to + 155°C
Climatic Category	55 / 125 / 56
Sealing	fully sealed container IP67

POWER RATING CHART

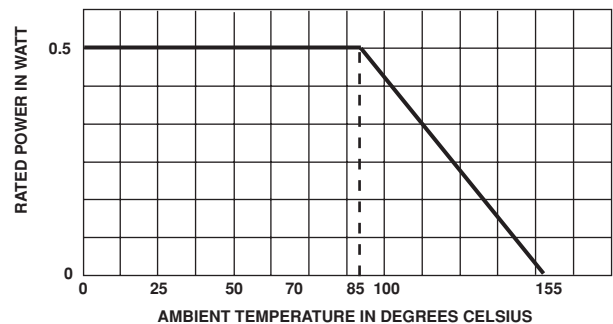

PERFORMANCE

TESTS	CONDITIONS	TYPICAL VALUES AND DRIFTS	
		$\frac{\Delta R_{T-2}}{R_{T-2}}$ (%)	$\frac{\Delta R_{1-2}}{R_{1-2}}$ (%)
Load Life	1000 hours at rated power 90°/30° - ambient temp. 70°C	$\pm$ 1% Contact res. variation: < 1% Rn	$\pm$ 2%
Climatic Sequence	Phase A dry heat 125°C - 30% Pr Phase B damp heat Phase C cold - 55°C Phase D damp heat 5 cycles	$\pm$ 0.5%	$\pm$ 1%
Long Term Damp Heat	56 days	$\pm$ 0.5% Dielectric strength: 1000V RMS Insulation resistance: > 10 ⁴ M Ω	$\pm$ 1%
Rapid Temperature Change	5 cycles - 55°C at + 125°C	$\pm$ 0.5%	$\frac{\Delta V_{1-2}}{V_{1-3}} \leq \pm$ 1%
Shock	50 g at 11m secs 3 successive shocks in 3 directions	$\pm$ 0.1%	$\pm$ 0.2%
Vibration	10-55 Hz 0.75mm or 10 g during 6 hours	$\pm$ 0.1%	$\frac{\Delta V_{1-2}}{V_{1-3}} \leq \pm$ 0.2%
Rotational Life	200 cycles	$\pm$ 2% Contact res. variation: < 1% Rn	

**STANDARD RESISTANCE ELEMENT DATA**

STANDARD RESISTANCE VALUES	LINEAR LAW			T.C. -55°C +125°C
	MAX. POWER AT 85°C	MAX. WORKING VOLTAGE	MAX. CUR. THROUGH ELEMENT	
Ω	W	V	mA	ppm/°C
10	0.5	2.2	224	0 +200
22	↓	3.3	150	
47		4.8	103	
100		7	70	± 100
220		10.5	47	
470		15.3	32	
1k		22.4	22	
2.2k		33.2	15	
4.7k		48.5	10	
10k		70.7	7	
22k		105	4.8	
47k		153	3.2	
100k	0.5	224	2.2	
220k	0.28	250	1.1	
470k	0.13	250	0.53	
1M	0.06	250	0.25	
2.2M	0.028	250	0.11	

MARKING

Printed:

- VISHAY trademark
- series
- style
- ohmic value (in Ω, kΩ, MΩ)
- tolerance (in %)
- manufacturing date
- marking of terminal 3

PACKAGING

- In bulk (box of 200 pieces), code B0200
- On request in tube

ORDERING INFORMATION

64 MODEL	P TERMINAL STYLE P, W, X, Y or Z	201 EIA RESISTANCE CODE
--------------------	---	--------------------------------------

NB. On delivery the wiper is positioned at mid-travel.

SAP PART NUMBERING GUIDELINES

M	6	4	P	2	0	1	K	B	4	0			
MODEL			STYLE	OHMIC VALUE			TOL	PACKAGING CODE			SPECIAL (IF APPLICABLE)		

See the end of this data book for conversion tables