


1

2

3

4

5

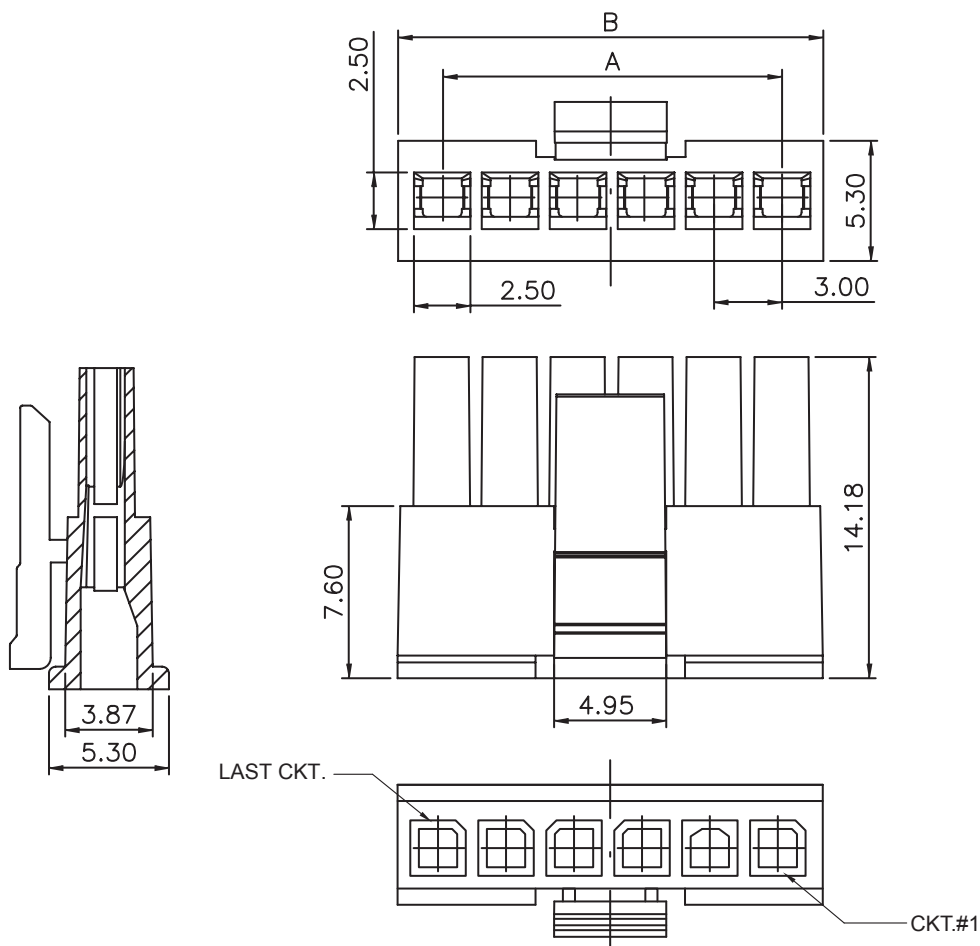

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: NYLON 66
COLOR: BLACK
PITCH: 3.00MM

ENVIRONMENTAL
OPERATING TEMPERATURE: -25 UP TO 105°C
FLAMABILITY RATING: UL94-V0
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
CURRENT RATING: 5A
WORKING VOLTAGE: 250V AC
INSULATOR RESISTANCE: >1000 MOHM
DIELECTRIC WITHSTANDING VOLTAGE: 1500V AC/MN

STANDARD
UL CERTIFIED: E323964

PACKAGING
BAG

DIMENSION
A = 3.00 x (NB. PIN - 1)
B = 3.00 x (NB. PIN) + 0.85

RoHS Compliant

PROJECTION:



GENERAL TOLERANCE

.X = ± 0.2 .XX = ± 0.15 

APPROVAL: BBu

UNIT: MM

SCALE:

SHEET: 1/3


DRAW: AS

DESCRIPTION: WR-MPC3 - 3.00MM FEMALE SINGLE ROW RECEPTACLE

WERI PART NO: 662 0xx 013 322



SIZE

A4

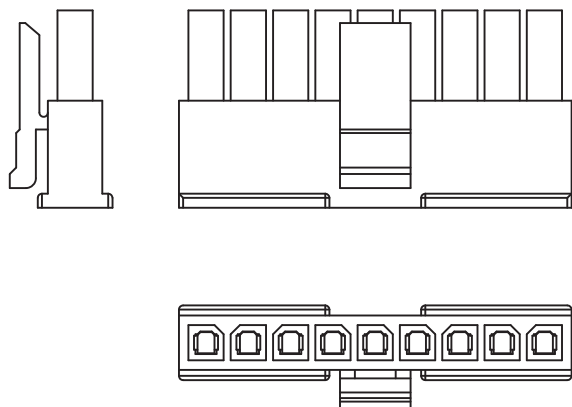


Note:
1.Dimension:
Carton Size:40*28*28(cm)
2.Quantity:

Pin.	Pcs/Bag	Pcs/Carton	Pin.	Pcs/Bag	Pcs/Carton
2	1000	14000	8	500	5000
3	1000	14000	9	500	5000
4	1000	10000	10	250	3500
5	1000	10000	11	250	2500
6	1000	6000	12	250	2500
7	500	6000			



Carton

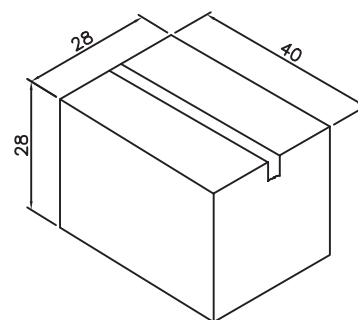

RoHS Compliant							
G				PROJECTION: 	GENERAL TOLERANCE .X = $\pm$ 0.2 .XX = $\pm$ 0.15	 WÜRTH ELEKTRONIK	
F							
E							
D							
C				APPROVAL: BBu	UNIT: MM	DESCRIPTION: WR-MPC3 - 3.00MM FEMALE SINGLE ROW RECEPTACLE	SIZE A4
B					SCALE:		
A					SHEET: 2/3	WERI PART NO: 662 0xx 013 322_TPK	
REV	DATE	FILE	BY		DRAW: AS		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Würth Electronics:

[662004013322](#) [662010013322](#) [662005013322](#) [662009013322](#) [662012013322](#) [662007013322](#) [662006013322](#)
[662002013322](#) [662011013322](#) [662008013322](#) [662003013322](#)