
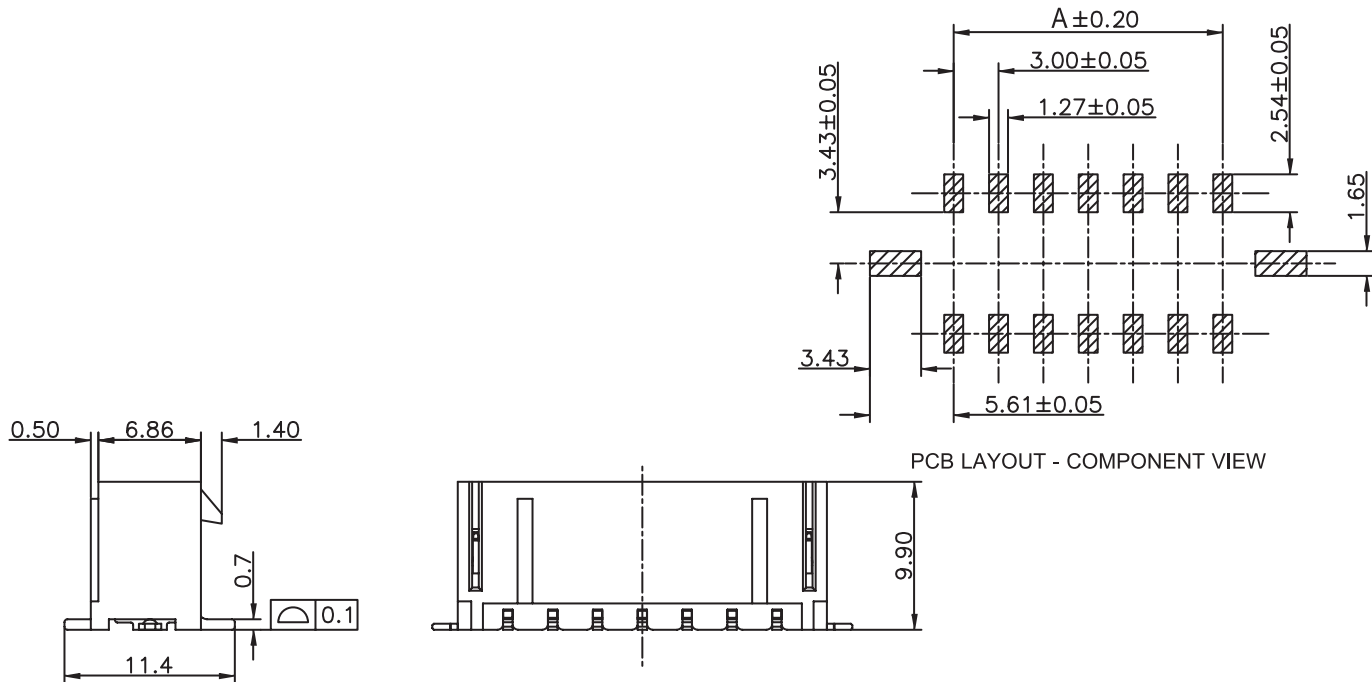


1				2				3				4				5				A							
								TECHNICAL CHARACTERISTICS MATERIAL INSULATOR: LCP FLAMABILITY RATING: UL94-V0 COLOR: BLACK CONTACT MATERIAL: COPPER ALLOY CONTACT TYPE: STAMPED CONTACT PLATING: TIN QUALITY CLASS: 25 MATING CYCLES PITCH: 3.00MM ENVIRONMENTAL OPERATING TEMPERATURE: -40 UP TO 105°C COMPLIANCE: LEAD FREE AND ROHS ELECTRICAL CURRENT RATING: 5A WORKING VOLTAGE: 250V AC INSULATOR RESISTANCE: >1000 MOHM DIELECTRIC WITHSTANDING VOLTAGE: 1500V AC/MN CONTACT RESISTANCE: 10 mOHM MAX STANDARD  CERTIFIED: E323964 SOLDERING JEDEC LEAD FREE REFLOW PACKAGING TRAY DIMENSION A = 3.00 x (NB. PIN / 2 - 1) B = 3.00 x (NB. PIN / 2 + 1) + 0.70												B				C			
								RoHS Compliant				PROJECTION: 				GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15								D			
L 29-JUL-13 DWG & CARAC QL				APPROVAL: RJ				UNIT: MM				DESCRIPTION: 3.00MM MALE DUAL ROW SMT VERTICAL HEADER WITH SMT SOLDER TAB				SIZE											
K 21-JAN-13 DIM A & B MOD QL								SCALE:				WERI PART NO: 662 0xx 231 822				A4											
J 06-JUL-12 PLASTIC GG								SHEET: 1/2																			
I 22-FEB-12 DESCRIPTION GG								DRAW: PEARL																			
H 29-AUG-11 PACKAGING JP																											
REV DATE FILE BY																											

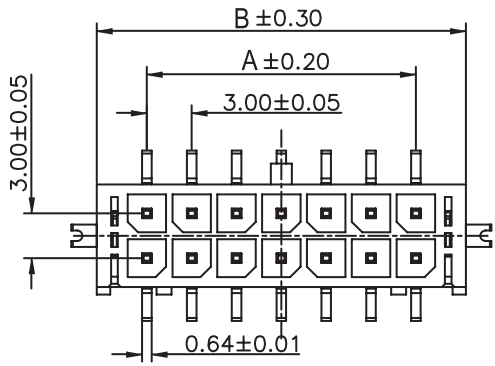