


DESCRIPTION: POWER COMBO SOLDER CUP

FACE VIEW OF RECEPTACLE IS SHOWN




5W1




3W3



3W3K




7W2




11W1




5W5



13W3




17W2



21W1



8W8



21WA4

PART NUMBER KEY

680 XXXX X 0 2 XX 1

SERIES

680

SHELL SIZE

- 5W1
- 3W3
- 3W3K
- 7W2
- 11W1
- 5W5
- 13W3
- 17W2
- 21W1
- 8W8
- 21WA4 (SEE BELOW)

GENDER

- 1 = MALE (PLUG)
- 2 = FEMALE (RECEPTACLE)

TERMINATION TYPE

- 0 = SOLDER CUP

SHELL PLATING

- 2 = TIN/ZINC

POWER CONTACT

- 20 = 20 AMP
- 40 = 40 AMP


CONTACT PLATING

- 1 = GOLD FLASH


68021WA4 PART NUMBERS = 68021WA4P201 = MALE 20 AMP  
 68021WA4P401 = MALE 40 AMP  
 68021WA4S201 = FEMALE 20 AMP  
 68021WA4S401 = FEMALE 40 AMP

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: PAM JENKINS	DATE: 6-3-02
		CHECKED:	DATE:
<h1>NorComp</h1>	SCALE:	SHEET 1 OF 1	REV 3
	DWG NO. 680 SERIES CONNECTORS		


DESCRIPTION: SIGNAL/POWER CONTACTS



SIGNAL CONTACTS  
ACCEPTS UP TO 20 AWG WIRE

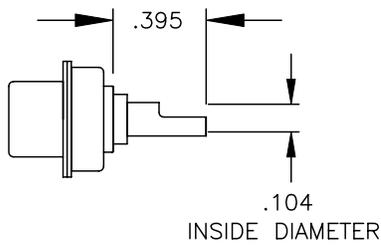

20 AMP POWER CONTACTS  
ACCEPTS UP TO 12 AWG WIRE

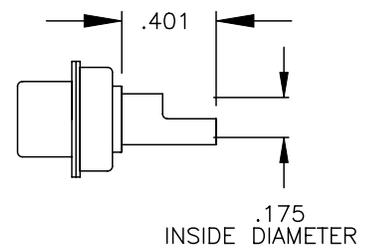

40 AMP POWER CONTACTS  
ACCEPTS UP TO 8 AWG WIRE

NOTE: SIGNAL AND POWER CONTACTS COME PRE-LOADED INTO INSULATOR.

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: PAM JENKINS	DATE: 6-5-02
			CHECKED:	DATE:
<b>NorComp</b>	SCALE:	SHEET <b>1</b>	OF <b>1</b>	REV <b>3</b>
	DWG NO. 680 XXXX X 0 2 XX 1			