Model 68

3/8" Square
Multiturn
Cermet Trimming Potentiometer



ELECTRICAL

Standard Resistance Range	10 Ohms to 2 Megohms
Standard Resistance Tolerance	±10% (<100 Ohms = ±20%)
Input Voltage	200 Vdc Max. or rms not to exceed power rating
Slider Current	100 mA Max. or within rated power, whichever is less
Power Rating	0.5 Watts at 85°C derating to 0 at 125°C
End Resistance	2 Ohms Max.
Actual Electrical Travel	20 turns nominal
Dielectric Strength	900 Vrms
Insulation Resistance	1,000 Megohms Min.
Resolution	Essentially infinite
Contact Resistance Variation	1% or 1 Ohm Max., whichever is greater

ENVIRONMENTAL

Seal	85°C Fluorinert® (No Leaks)
Temperature Coefficient	±100 ppm/°C (<100 Ohms = ±250 ppm/°C)
Operating Temperature Range	–55°C to +125°C
Thermal Shock	Five cycles –55°C to +125°C (1% ΔRT, 1% ΔVR)
Moisture Resistance	Ten 24 hour cycles (1% ΔRT, IR 1,000 Megohms Min.)
Shock	6 ms sawtooth, 100 G's (1% ΔRT, 1% ΔVR)
Vibration	20 G's, 10 to 2,000 Hz (1% ΔRT, 1% ΔVR)
High Temperature Exposure	250 hours at 125°C (2% ΔRT, 2% ΔVR)
Rotational Life	200 cycles (3% ΔRT)
Load Life	1,000 hours at 70°C & 0.5 Watts (2% ΔRT)
Resistance to Solder Heat	260°C for 10 sec. (1% ΔRT)

MECHANICAL

Mechanical Stops	Clutch action, both ends
Torque, Starting	5 oz.-in. Max. (0.035 N-m)
Weight	0.04 oz. nominal (1.1 grams)

Specifications subject to change without notice.
Fluorinert® is a registered trademark of 3M Company.

BI Technologies Corporation
4200 Bonita Place, Fullerton, CA 92835 USA
Phone: 714 447 2345 Website: www.bitechnologies.com

TT electronics
BI Technologies

Model 68

PACKAGING

Standard (no code): Boxes. Capacity = 100 units for 68W. 50 units for all other pin styles.

Option (TR code, available for 68W & 68X only): Tape & Reel. All units oriented with #1 pin to the right of the direction of feed.

Tape	Width =	18 mm
	Sprocket =	Single hole, 0.050" spacing
	Capacity =	1,000 units
	Seat plane to centerline of sprocket hole =	0.71" (18 mm)
Reel	Diameter =	14" (363 mm)

Option (AP code, available for 68W & 68X only): Ammo Pack. All units oriented with #1 pin to the right of the direction of feed.

Ammo	Tape Fold =	12" (305 mm)
	Box =	1.8" x 13" x 10" (46 mm x 330 mm x 254 mm)

Option (TB code): Tubes. All units oriented with #1 pin to same side. Tube capacity = 50 units.

	Pin Style	P	W	X
Dimensions	Width =	0.57"	0.33"	0.33"
	Height =	0.66"	0.90"	0.90"
	Length =	20.9"	20.4"	24.4"

ORDERING INFORMATION

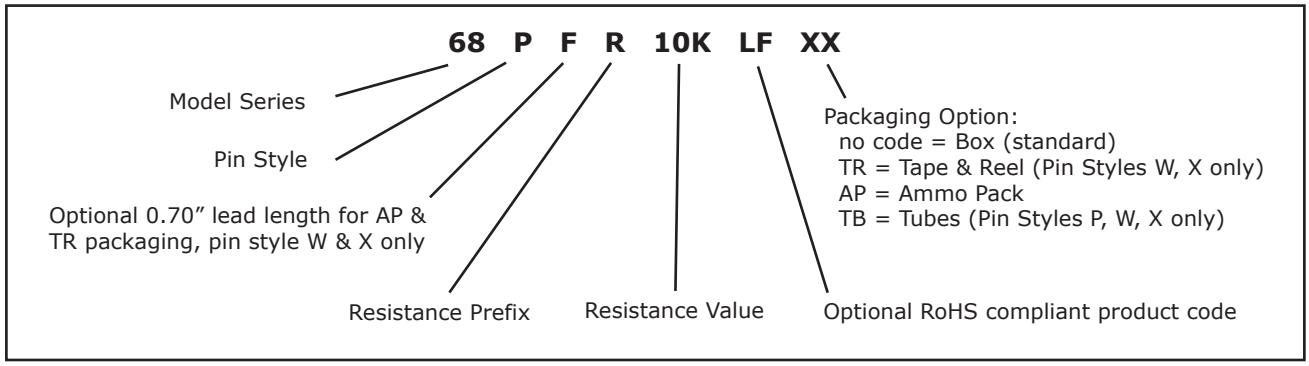

CIRCUIT DIAGRAM



STANDARD RESISTANCE VALUES

10	200	5K	50K	500K
20	500	10K	100K	1Meg
50	1K	20K	200K	2Meg
100	2K	25K	250K	

Model 68

TOP ADJUSTMENT

Model 68W

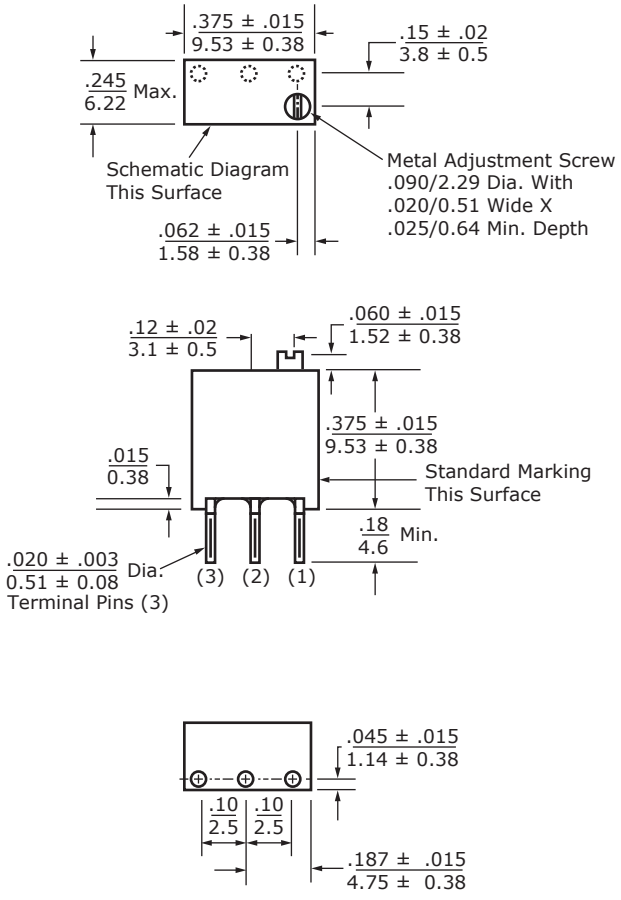

SIDE ADJUSTMENT

Model 68X

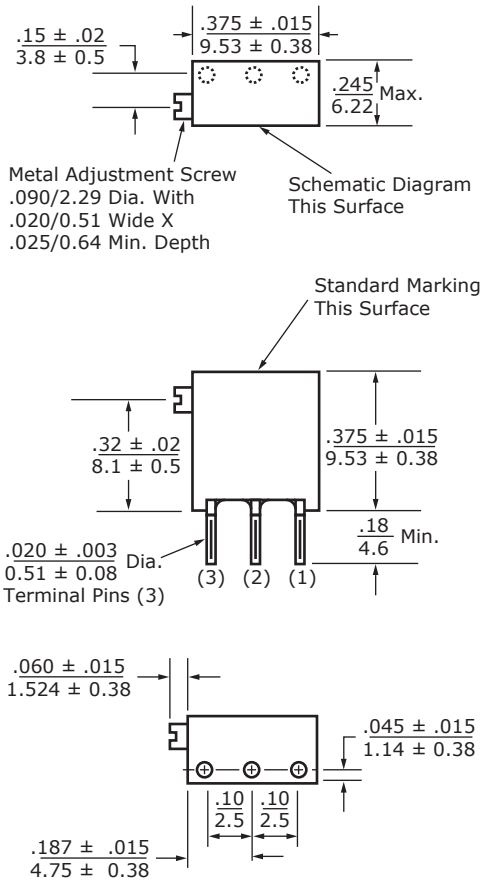

SIDE ADJUSTMENT

Model 68P

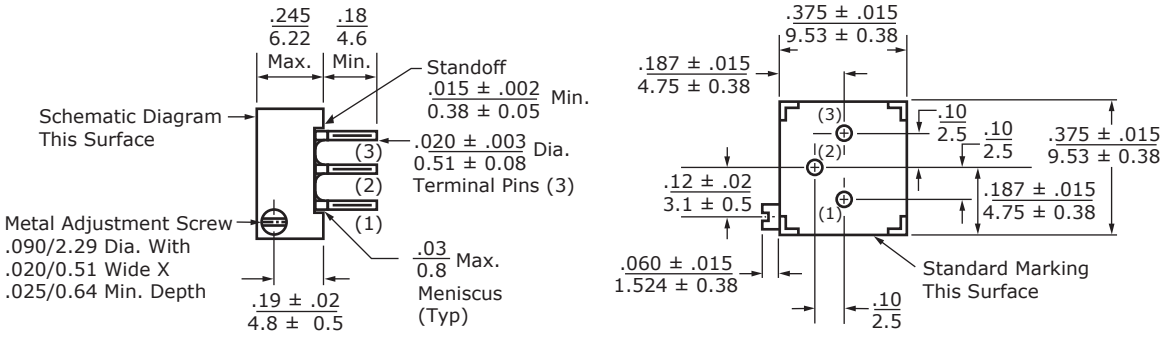

BI Technologies Corporation
4200 Bonita Place, Fullerton, CA 92835 USA
Phone: 714 447 2345 Website: www.bitechnologies.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TT electronics:

68XR2MLF

TT Electronics:

68WR50KLF 68WR5KTB 68WFR5KTR 68WR200TB 68WR100LF 68PR100LF 68PR100KLF 68PR10KLF 68PR1KLF 68PR1MEGLF 68PR200LF 68PR20KLF 68PR500LF 68PR50KLF 68PR5KLF 68WR100KLFTB 68WR1MEGLF 68WR500KLFTB 68WR5KLFTB 68XR100KLFTB 68XR100LFTB 68XR10KLFTB 68XR1MEGLF 68XR200LFTB 68XR2KLFTB 68XR500KLFTB 68XR50KLFTB 68XR5KLF 68XR5KLFTB 68WR1KLF 68WR500KLF 68XR50KLF 68WR20KLF 68XR1KLF 68XR2KLF 68XR1MLF 68WR200KLF 68XR200KLF 68XR20LF 68WR200LF 68XR500LF 68XR10LF 68WR250KLF 68XR250KLF 68XR200LF 68WR25KLF 68WR500LF 68XR20KLF 68WR10KLF 68WR2MLF 68WR2KLF 68WR1MLF 68WR20LF 68WR10LF 68XR10KLF 68XR500KLF 68XR50LF 68WR50LF 68XR100LF 68XR25KLF 68WR100KLF 68XR100KLF 68WR5KLF 68XR2MEGLF 68WR200LFTB 68WR10LFTB 68XFR10KLFTR 68XR10LFTB 68PR500KLFTB 68WFR100LFAP 68WFR500LFAP 68XR20LFTB 68XR25KLFTB 68XR50LFTB 68WFR500LKTR 68WFR200LFAP 68WFR20KLFTR 68WFR100KLFTR 68WFR1KLFAP 68WFR5KLFTR 68WR1MEGLFTB 68WR20LFTB 68XR200KLFTB 68PR100KLFTB 68PR20KLFTB 68PR2MEGLF 68PR50KLFTB 68PR5KLFTB 68WFR100KLFAP 68WR2KLFTB 68WR2MEGLFTB 68WR50KLFTB 68XR1KLFTB 68XR20KLFTB 68XR2MEGLFTB 68WFR250KLFTR 68WFR2KLFAP 68WFR2KLFTR 68WFR50KLFAP 68WR100LFTB