


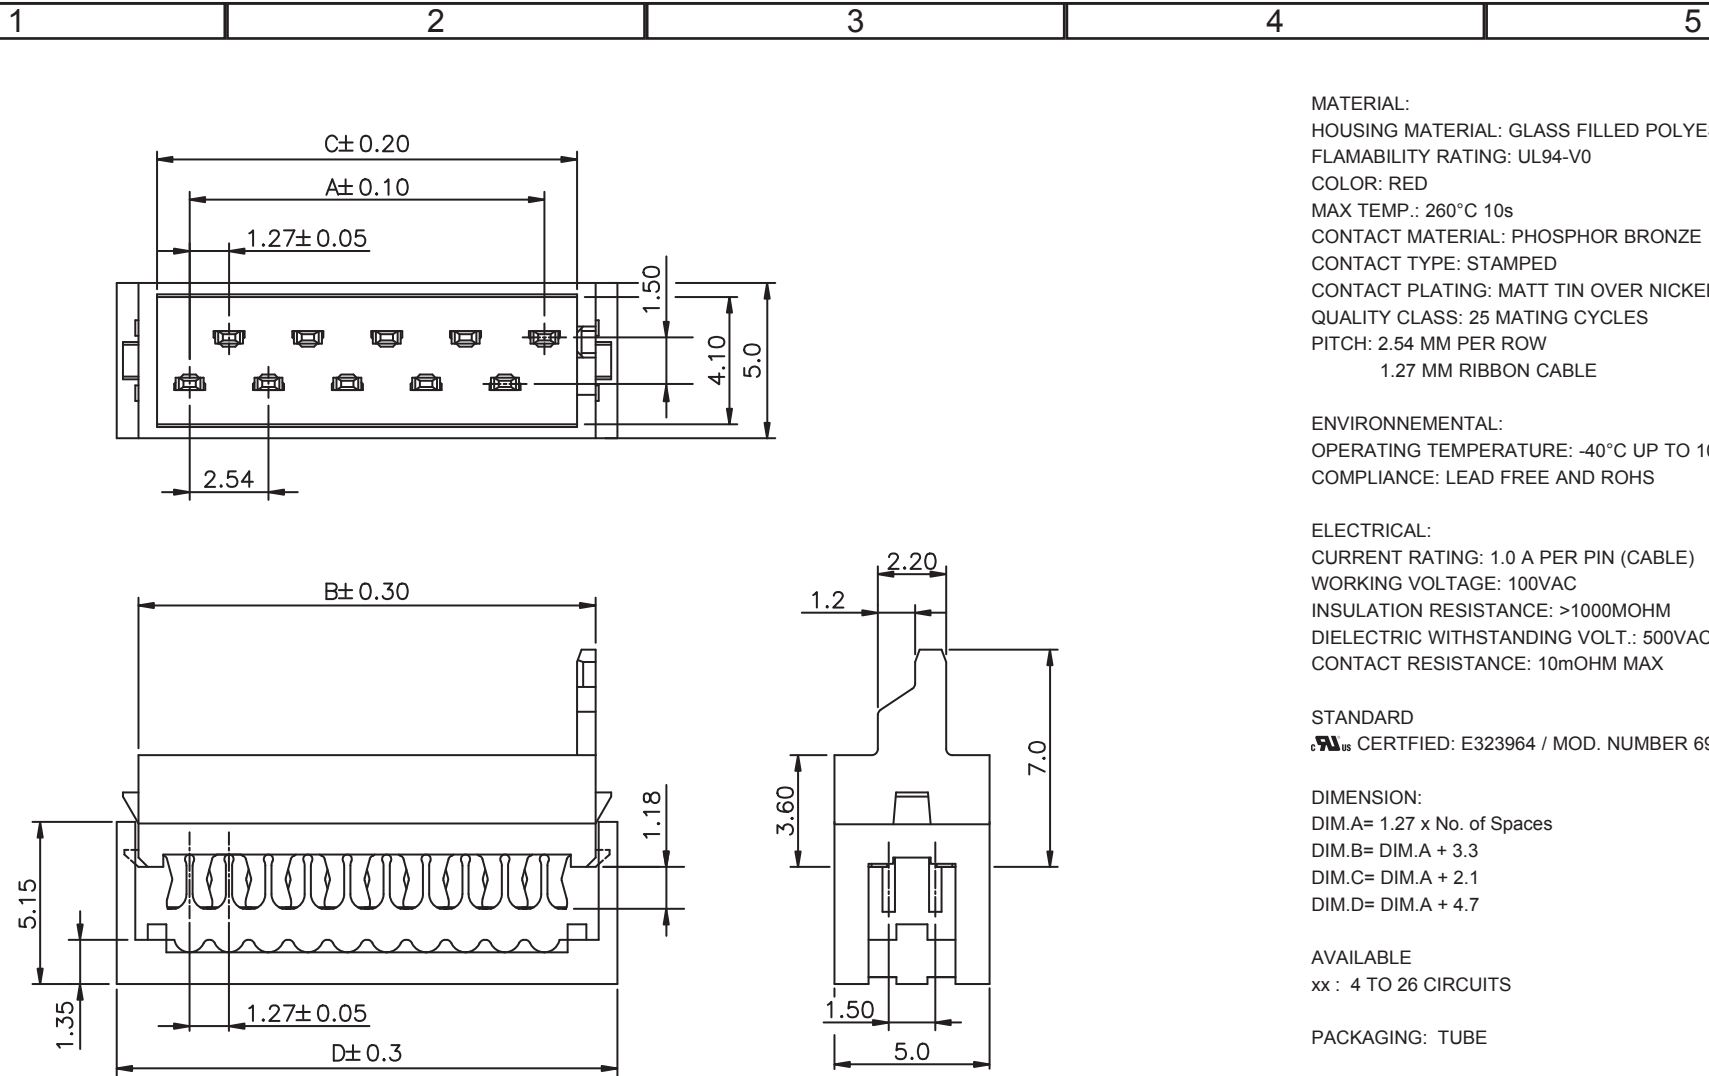

MATERIAL:
 HOUSING MATERIAL: GLASS FILLED POLYESTER
 FLAMABILITY RATING: UL94-V0
 COLOR: RED
 MAX TEMP.: 260°C 10s
 CONTACT MATERIAL: PHOSPHOR BRONZE
 CONTACT TYPE: STAMPED
 CONTACT PLATING: MATT TIN OVER NICKEL
 QUALITY CLASS: 25 MATING CYCLES
 PITCH: 2.54 MM PER ROW
 1.27 MM RIBBON CABLE

ENVIRONNEMENTAL:
 OPERATING TEMPERATURE: -40°C UP TO 105°C
 COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL:
 CURRENT RATING: 1.0 A PER PIN (CABLE)
 WORKING VOLTAGE: 100VAC
 INSULATION RESISTANCE: >1000MOHM
 DIELECTRIC WITHSTANDING VOLT.: 500VAC/MN
 CONTACT RESISTANCE: 10mOHM MAX

STANDARD
 CE CERTIFIED: E323964 / MOD. NUMBER 69015700xx7x

DIMENSION:
 DIM.A= 1.27 x No. of Spaces
 DIM.B= DIM.A + 3.3
 DIM.C= DIM.A + 2.1
 DIM.D= DIM.A + 4.7

AVAILABLE
 xx : 4 TO 26 CIRCUITS

PACKAGING: TUBE

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15		DESCRIPTION: MM MALE IDC CONNECTOR	SIZE A4
G								
F								
E								
D	13-NOV-13	DWG UPDATE	QL	APPROVAL: RJ	UNIT: MM SCALE: SHEET: 1/1 DRAW: EAGER	WERI PART NO: 690 157 00 xx 72		
C	07-APR-10	PINNING	JP					
B	09-MAR-10	STANDARD	JP					
A	03-NOV-06	PDF	JP					
REV	DATE	FILE	BY					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Würth Electronics:](#)

[690157002072](#) [690157001072](#) [690157000672](#) [690157000872](#) [690157001272](#) [690157000472](#)