
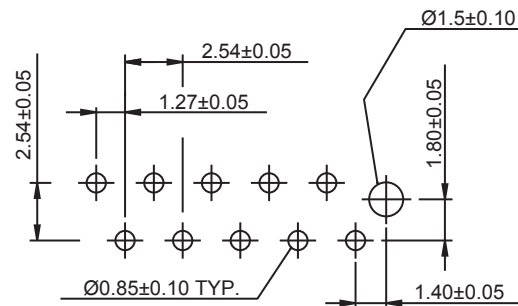

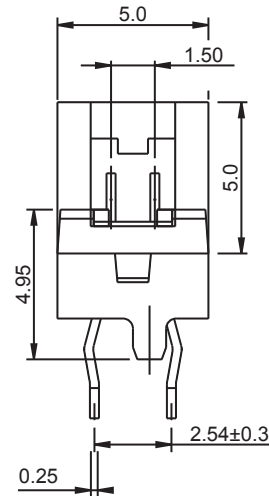
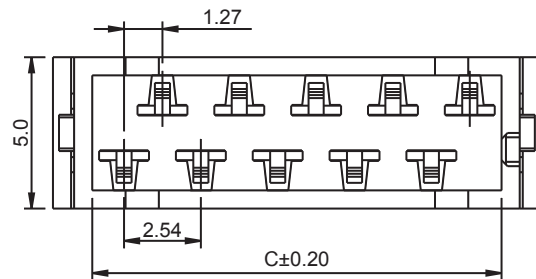


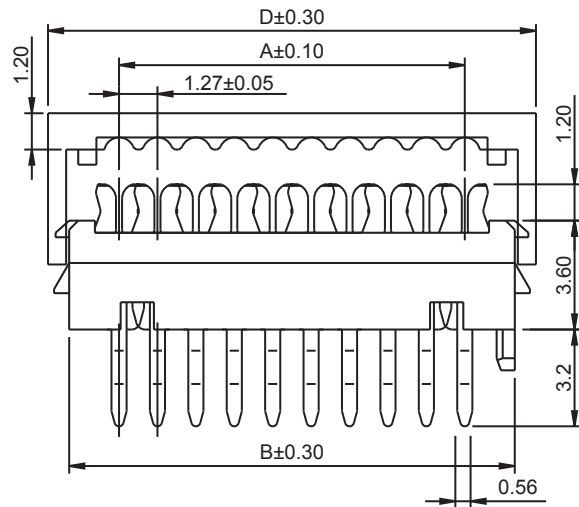

PCB LAYOUT - COMPONENT VIEW

MATERIAL:
HOUSING MATERIAL: PBT
FLAMABILITY RATING: UL94-V0
COLOR: RED
CONTACT MATERIAL: PHOSPHOR BRONZE
CONTACT TYPE: STAMPED
CONTACT PLATING: MATT TIN OVER NICKEL
PITCH: 2.54 MM PER ROW
1.27 MM RIBBON CABLE

ENVIRONNEMENTAL:
OPERATING TEMPERATURE: -40°C UP TO 105°C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL:
CURRENT RATING: 1.0 A PER PIN (CABLE)
WORKING VOLTAGE: 100VAC
INSULATION RESISTANCE: >1000MOHM
DIELECTRIC WITHSTANDING VOLT.: 500VAC/MN
CONTACT RESISTANCE: 10mOHM MAX


STANDARD
CERTIFIED: E323964 / MOD. NUMBER 69020710xx7x

 SOLDERING: WAVE PROCESS ONLY

DIMENSION:
DIM.A= 1.27 x No. of Spaces
DIM.B= DIM.A + 3.3
DIM.C= DIM.A + 2.1
DIM.D= DIM.A + 4.7

AVAILABLE
xx : 4 TO 26 CIRCUITS

PACKAGING:
x = 2 TUBE
x = 7 TAPE & REEL

RoHS Compliant							SIZE
G				PROJECTION:	GENERAL TOLERANCE		
F	08-JUL-14	CHARAC. MAT.	AS		.X = +/- 0.2		
E	07-MAR-11	CLOSE HEIGHT	GG		.XX = +/- 0.15		
D	07-APR-10	PINNING	JP				
C	09-MAR-10	STANDARD	JP				
B	27-NOV-07	MODIFICATIONS	CH	APPROVAL: RJ	UNIT: MM		DESCRIPTION: MM TRANSITION CONNECTOR
A	03-NOV-06	PDF	JP		SCALE:		
REV	DATE	FILE	BY		SHEET: 1/1	WERI PART NO: 690 207 10 xx 7 x	
					DRAW: EAGER		
							A4

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Würth Electronics:](#)

[690207100472](#) [690207100672](#) [690207100872](#) [690207101072](#) [690207101272](#) [690207102072](#)