
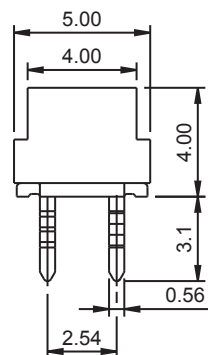


* 1 hole necessary to let IDC nose go through the hole

PCB LAYOUT - COMPONENT VIEW

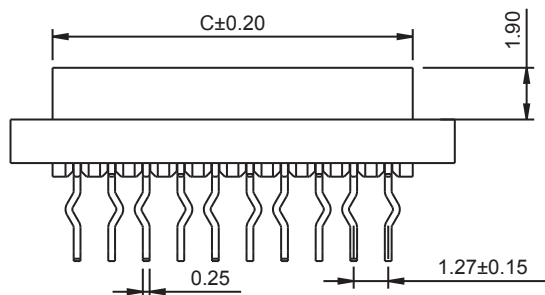

MATERIAL:
HOUSING MATERIAL: PBT
FLAMABILITY RATING: UL94-V0
COLOR: RED
CONTACT MATERIAL: PHOSPHOR BRONZE
CONTACT TYPE: STAMPED
CONTACT PLATING: MATT TIN OVER NICKEL
QUALITY CLASS: 25 MATING CYCLES
PITCH: 2.54 MM PER ROW

ENVIRONNEMENTAL:
OPERATING TEMPERATURE: -40°C UP TO 105°C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL:
CURRENT RATING: 1.5A PER PIN (PCB PIN)
WORKING VOLTAGE: 100VAC
INSULATION RESISTANCE: >1000MOHM
DIELECTRIC WITHSTANDING VOLT.: 500VAC/MN
CONTACT RESISTANCE: 10mOHM MAX

STANDARD
UL CERTIFIED: E323964 / MOD. NUMBER 69036718xx7x

SOLDERING:
WAVE PROCESS ONLY

DIMENSION:
DIM.A= 1.27 x No. of Spaces
DIM.B= DIM.A + 3.27
DIM.C= DIM.A + 1.80

AVAILABLE
xx : 4 TO 26 CIRCUITS

PACKAGING:
TUBE

RoHS Compliant							SIZE
REV	DATE	FILE	BY	PROJECTION:	GENERAL TOLERANCE	DESCRIPTION: MM FEMALE CONNECTOR WITHOUT LATCH AND POLARIZATION	
G					.X = ± 0.2 .XX = ± 0.15		A4
F	02-MAY-11	DIMENSION B	GG				
E	12-MAY-10	PCB LAYOUT	JP				
D	07-APR-10	PINNING	JP				
C	09-MAR-10	STANDARD	JP	APPROVAL: RJ	UNIT: MM	WERI PART NO: 690 367 18 xx 72	A4
B	24-DEC-07	LAYOUT / INSET	CH		SCALE:		
A	03-NOV-06	PDF	JP		SHEET: 1/1		
REV	DATE	FILE	BY		DRAW: EAGER		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Würth Electronics:](#)

[690367180472](#) [690367181272](#) [690367180672](#) [690367181072](#) [690367182072](#) [690367180872](#)