


1

2

3

4

5



Pitch:3.81mm	
Poles	A(mm)
2	8.42
3	12.23
4	16.04
5	19.85
6	23.66
7	27.47
8	31.28
9	35.09
10	38.90
11	42.71
12	46.52

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: PA 66
FLAMABILITY RATING: UL94-V0
COLOR: GREEN & ORANGE
METAL SPRING: STAINLESS STRIP STEEL
WIRE GUARD: PbZn TIN PLATED

ENVIRONMENTAL
OPERATING TEMPERATURE: -40 UP TO 115°C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
CURRENT RATING: 8A
WORKING VOLTAGE: 300VAC
WITHSTANDING VOLTAGE: 2.0KV
CONTACT RESISTANCE: 20 mOhm max



STANDARD
ULus CERTIFIED E315414 / Model number 69136830

MECHANICAL
SOLID WIRE: 28-16 AWG / 0.08-1.3MM²
STRANDED WIRE: 28-16 AWG / 0.08-1.3MM²

WIRE STRIPE LENGTH: 9MM
PITCH: 3.81MM

PACKAGING: BOX

SERIE 368B

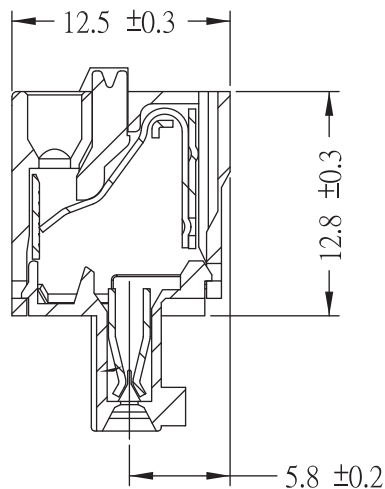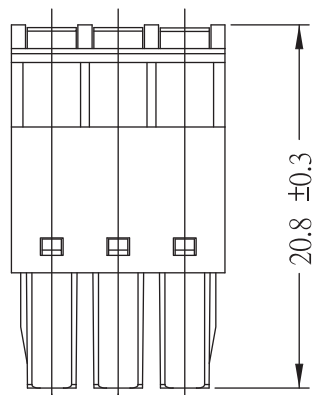


3.81 ±0.1

20.8 ±0.3

5.8 ±0.2

RoHS Compliant

PROJECTION:



GENERAL TOLERANCE

.X = ± 0.2 .XX = ± 0.15 

WÜRTH ELEKTRONIK

APPROVAL: RJ

UNIT: MM

SCALE:

SHEET: 1/1


DRAW: MARVIN

DESCRIPTION: SERIE 368B - 3.81MM Scwless Vertical Cable Entry Plug -
1,3 mm² Wire

WERI PART NO: 691 368 300 0xx B

SIZE

A4

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = $\pm$ 0.2 .XX = $\pm$ 0.15	 WÜRTH ELEKTRONIK	
G							
F							
E							
D							
C				APPROVAL: RJ	UNIT: MM	DESCRIPTION: SERIE 368B - 3.81MM Scwless Vertical Cable Entry Plug - 1,3 mm² Wire	SIZE
B	02-JUL-13	STANDARD POLES	QL		SCALE:		
A	20-JUN-12	PDF	GG		SHEET: 1/1		
REV	DATE	FILE	BY		DRAW: MARVIN		
					WERI PART NO: 691 368 300 0xx B		
A4							

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Würth Electronics:](#)

[691368300002B](#) [691368300003B](#) [691368300004B](#) [691368300005B](#) [691368300006B](#) [691368300007B](#)
[691368300008B](#) [691368300009B](#) [691368300010B](#) [691368300011B](#) [691368300012B](#)