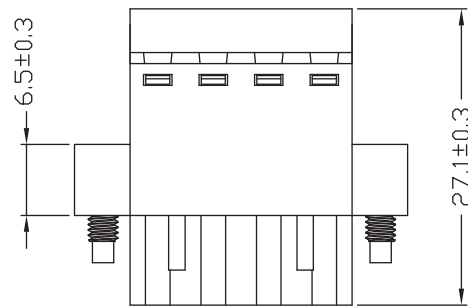
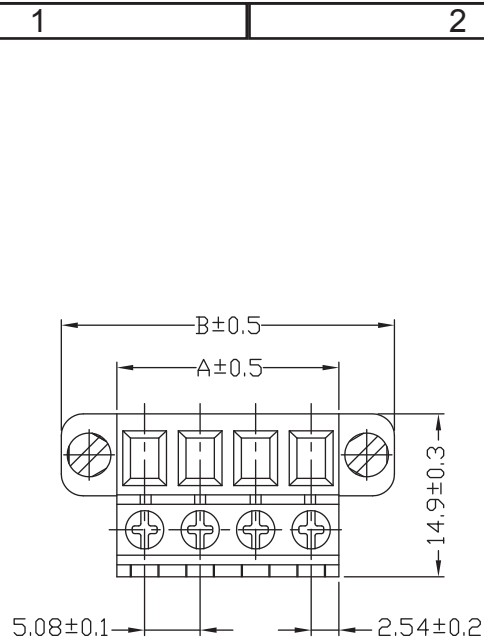


Pitch : 5.08mm(0.200inch)					
Poles	A(mm)	A(inch)	Poles	A(mm)	A(inch)
2	10.16	0.400	15	76.20	3.000
3	15.24	0.600	16	81.28	3.200
4	20.32	0.800	17	86.36	3.400
5	25.40	1.000	18	91.44	3.600
6	30.48	1.200	19	96.52	3.800
7	35.56	1.400	20	101.60	4.000
8	40.64	1.600	21	106.68	4.200
9	45.72	1.800	22	111.76	4.400
10	50.80	2.000	23	116.84	4.600
11	55.88	2.200	24	121.92	4.800
12	60.96	2.400			
13	66.04	2.600			
14	71.12	2.800			

TECHNICAL CHARACTERISTICS

MATERIAL
 INSULATOR: PA 66
 FLAMABILITY RATING: UL94-V0
 COLOR: GREEN
 METAL HOUSING: Ph BRONZE
 TERMINAL SCREW: STEEL ZINC PLATING
 TERMINAL SCREW SLOT TYPE: "+"
 WIRE GUARD: PhBz STEEL ZINC PLATING
 FLANGES SCREW: STEEL M2.6

ENVIRONMENTAL
 OPERATING TEMPERATURE: -40 UP TO 105°C
 COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL	cULus	VDE
CURRENT RATING:	16A	16A
WORKING VOLTAGE:	300VAC	300VAC
WITHSTANDING VOLTAGE:	2KV	2KV
CONTACT RESISTANCE:	20 mOhm max	

STANDARD
 eULus CERTIFIED E315414 / Model number 69137450

MECHANICAL
 SOLID WIRE: 24-12 AWG / 0.02-3.3MM²
 STRANDED WIRE: 24-12 AWG / 0.02-3.3MM²
 TORQUE: 4.5Lb-In / 0.5Nm

WIRE STRIPE LENGTH: 10MM
 PITCH: 5.08MM

PACKAGING: BOX

SERIE 374B

RoHS Compliant											
G				PROJECTION: 	GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15		 WÜRTH ELEKTRONIK				
F											
E											
D											
C				APPROVAL: RJ	UNIT: MM		DESCRIPTION: SERIE 374B - 5,08mm Vertical Cable Entry with Stamping Clamp & Flanges - 3,3 mm² Wire				SIZE
B					SCALE:						
A	20-JUN-12	PDF	GG		SHEET: 1/1		WERI PART NO: 691 374 500 0xx B				
REV	DATE	FILE	BY		DRAW: MARVIN						
									A4		