


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 19  
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
G	14				B	REV PER 0G3A-0568-02	16SEP02	JR/TM

**AMP**  
WIRE RANGE  
12-10 AWG  
STRANDED

**METRIC**  
DIMENSIONS LISTED IN mm [ INCHES ]

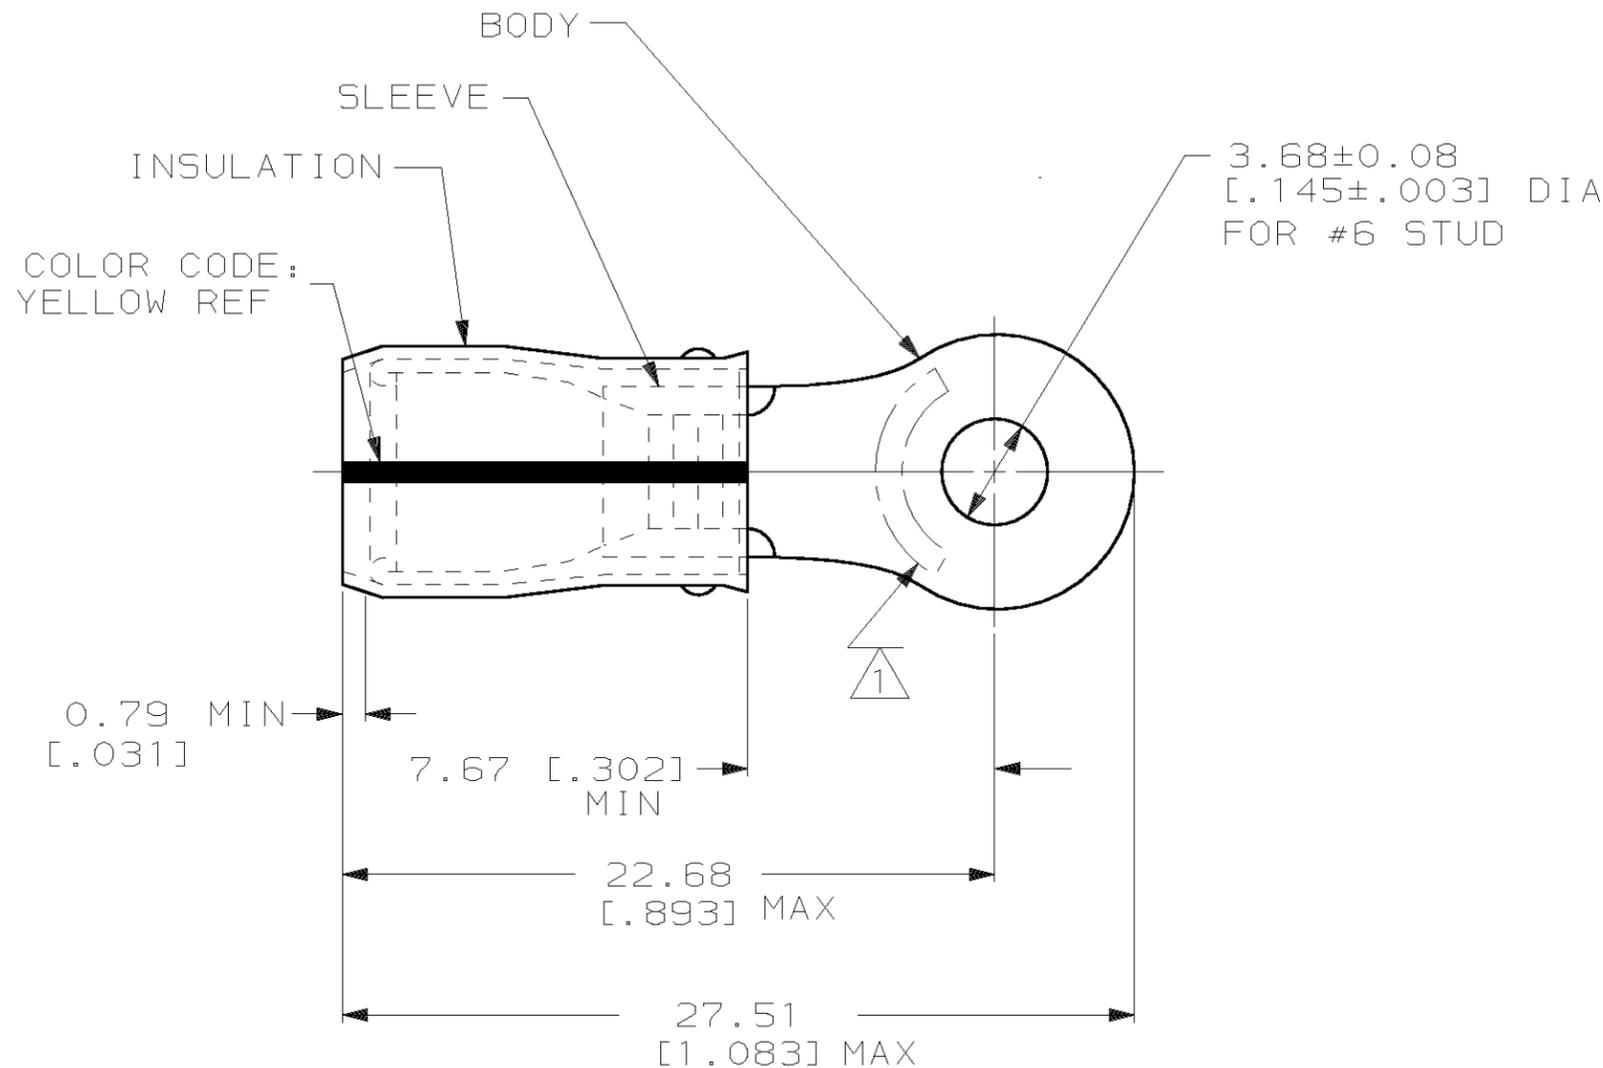

- ① STAMP AMP 12-10 APPROX AS SHOWN
- ② WIRE INSULATION DIA: .150-.230
- ③ TONGUE MATERIAL THK: 0.99<sup>+0.05</sup> [.039<sup>±.002</sup>]
- ④ PRELIMINARY - NOT FOR PRODUCTION & EXPENSIVE PART, HAND CRAFTED.

<b>AMP INCORPORATED CUSTOMER SERVICE SYSTEMS</b>		MAX RECOMMENDED OPERATING TEMPERATURE: 150°C MAX	500	LOOSE PIECE	④ 696243-1
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: NOT APPLICABLE	QUANTITY	PACKAGE TYPE	PART NO
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	CIRCULAR MIL AREA: 2.62-6.64mm <sup>2</sup> [5,180-13,100] STRANDED	<p><b>PRELIMINARY</b></p> <p>AMP Incorporated Harrisburg, PA 17105-3608</p> <p>NAME: TERMINAL, RING TONGUE, PVF<sub>2</sub>, P.I.D.G™ WIRE SIZE: 12-10 AWG</p>		
FOR ORDER ENTRY	1-800-526-5142	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.			
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLC DEC ± 0.20[.008] 3 PLC DEC ± - ANGLES ± -		FINISH BODY & SLEEVE: TIN/LEAD (60-40) PLATE PER SAE-AMS-P-81728			
MATERIAL BODY & SLEEVE: COPPER PER ASTM B152 INSULATION: PVF <sub>2</sub> NATURAL		DR 02JAN01 JR RUTH CHK 02JAN01 MS FEHER APPD 02JAN01 T MICHIELUTTI APPD 02JAN01 T MICHIELUTTI PRODUCT SPEC 108-11023 APPLICATION SPEC NOT AVAILABLE WEIGHT -			
SIZE		CAGE CODE	DRAWING NO		
SCALE 4:1		B 00779	C-696243		
SHEET		1 OF 1			