


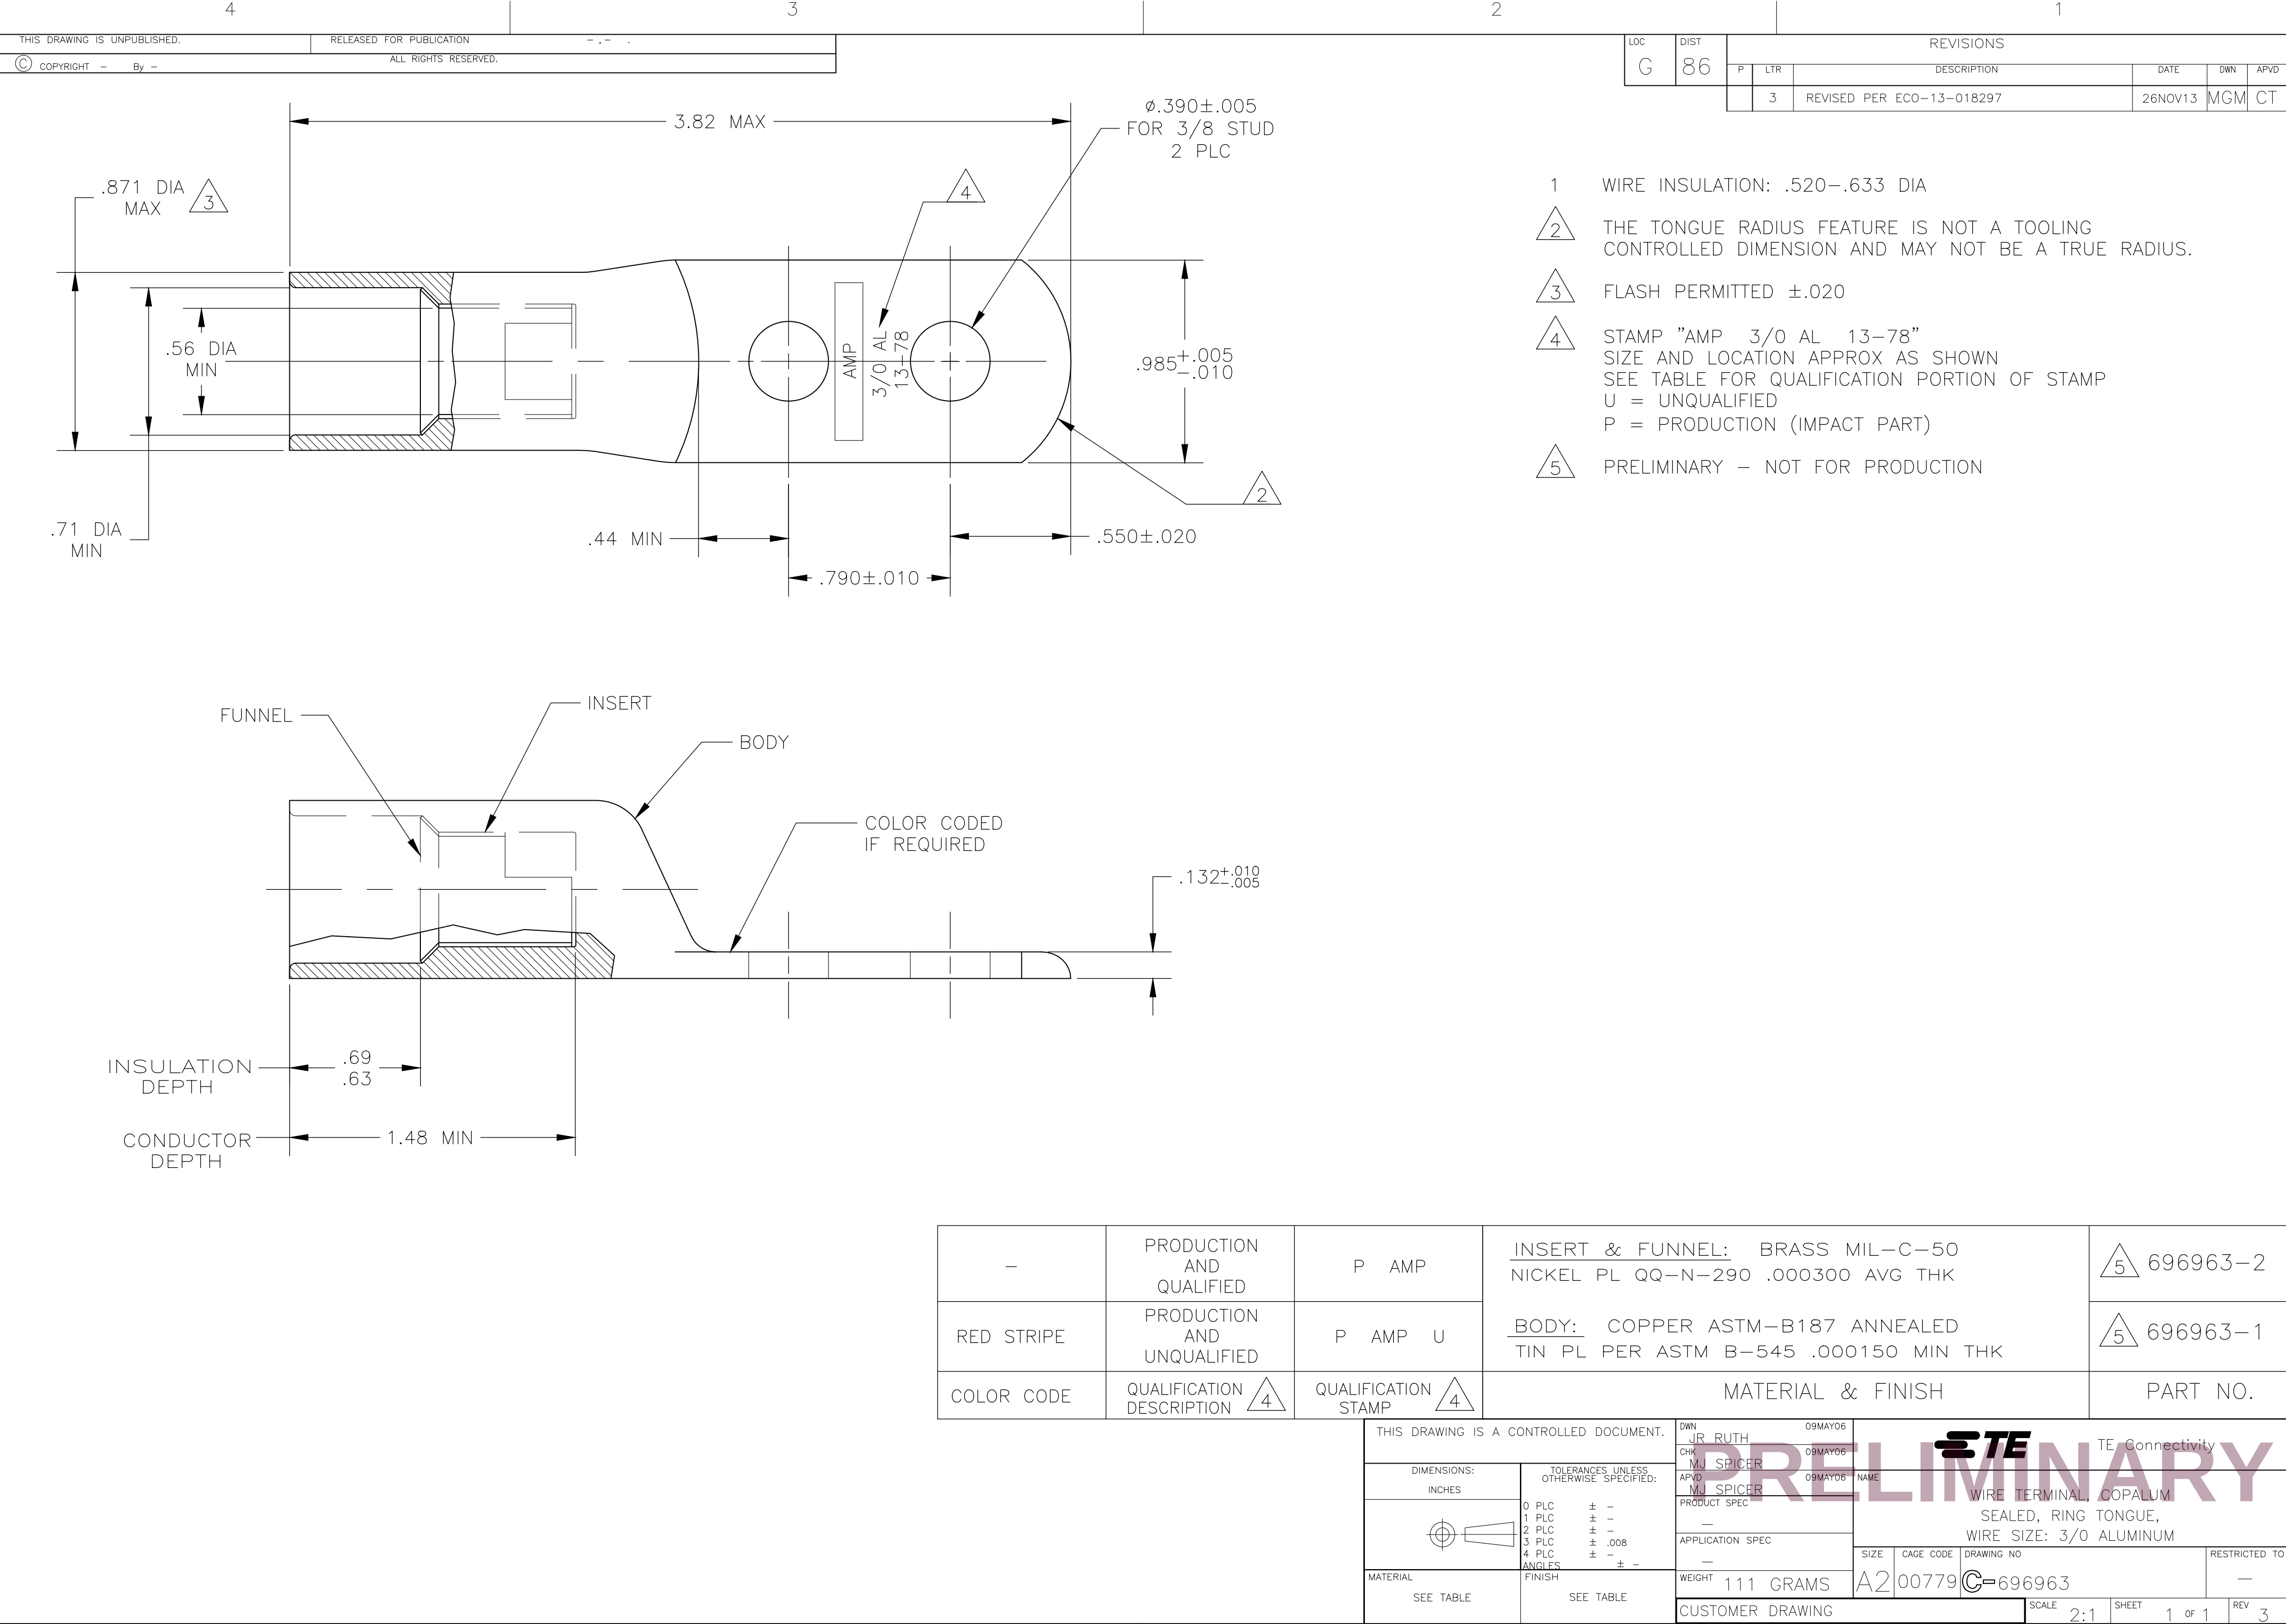

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
G	86						
			3	REVISED PER ECO-13-018297	26NOV13	MGM	CT

- 1 WIRE INSULATION: .520-.633 DIA
- 2 THE TONGUE RADIUS FEATURE IS NOT A TOOLING CONTROLLED DIMENSION AND MAY NOT BE A TRUE RADIUS.
- 3 FLASH PERMITTED $\pm .020$
- 4 STAMP "AMP 3/0 AL 13-78"
SIZE AND LOCATION APPROX AS SHOWN
SEE TABLE FOR QUALIFICATION PORTION OF STAMP
U = UNQUALIFIED
P = PRODUCTION (IMPACT PART)
- 5 PRELIMINARY - NOT FOR PRODUCTION

-	PRODUCTION AND QUALIFIED	P AMP	INSERT & FUNNEL: BRASS MIL-C-50 NICKEL PL QQ-N-290 .000300 AVG THK	5 696963-2
RED STRIPE	PRODUCTION AND UNQUALIFIED	P AMP U		5 696963-1
COLOR CODE	QUALIFICATION DESCRIPTION 4	QUALIFICATION STAMP 4	MATERIAL & FINISH	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JR RUTH 09MAY06	TE Connectivity	WIRE TERMINAL, COPALUM SEALED, RING TONGUE, WIRE SIZE: 3/0 ALUMINUM	
DIMENSIONS: INCHES		CHK MJ SPICER 09MAY06			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD MJ SPICER 09MAY06			
FINISH		PRODUCT SPEC			
MATERIAL SEE TABLE		APPLICATION SPEC	SIZE CAGE CODE DRAWING NO		RESTRICTED TO
SEE TABLE		WEIGHT 111 GRAMS	A2 00779 C-696963		-
SEE TABLE		CUSTOMER DRAWING	SCALE 2:1	SHEET 1 OF 1	REV 3