PACKET

CATALOG LISTING


6PA320-EN

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH. -.050 WIDE X .050 DEEP SLOT .037 DIA HOLE FOR WIRE LOCKING SAE 1/4-36 TAPERED SERRATIONS .14 DIA ACCESS HOLE FOR LEVER **ADJUSTMENT** PR-12830

THROUGH HEX HOLE
TO ACCEPT 3/32 ALLEN
WRENCH LEVER ADJUSTMENT 3 LOCKSCREW **GEAR**

LEVER MAY BE ADJUSTED FOR AN INFINITE NUMBER OF POSITIONS THRU 360° ADJUSTMENT IS MADE BY LOOSENING THE LOCK NUT AND THEN THE LOCKSCREW AND TURNING GEAR UNTIL LEVER IS IN DESIRED POSITION. LOCKSCREW AND LOCK NUT ON SHAFT IS THEN TIGHTENED TO POSITIVELY LOCK LEVER IN POSITION.

LEVER ADJUSTMENT DETAIL SCALE 2 TO I

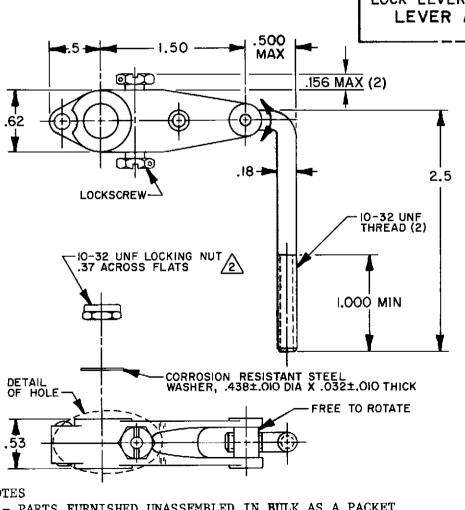

NOTES

- PARTS FURNISHED UNASSEMBLED IN BULK AS A PACKET

DO NOT APPLY MORE THAN 20-25 INCH-POUNDS OF TORQUE WHEN TIGHTENING LOCKING NUT

WORM GEAR TO TURN WITH 6 IN-LB MAX TORQUE WITH SCREWS LOCKED OUT TIGHT

DO NOT ALE PRINI SCALE **FULL** UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ±.030 ONE PLACE (.0) ±.015 (.00) TWO PLACE THREE PLACE (.000) $\pm.005$ ANGLES WEIGHT

THIRD ANGLE PROJECTION

6 RASTER |∞ Σ S

മ്

6PA320-EN

0

П

REVISIONS A C083307 TSM 18 MAR 97 B 206376

C 0017178

KRB 25NOV05

(.13)

(.15)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Honeywell: 6PA320-EN