
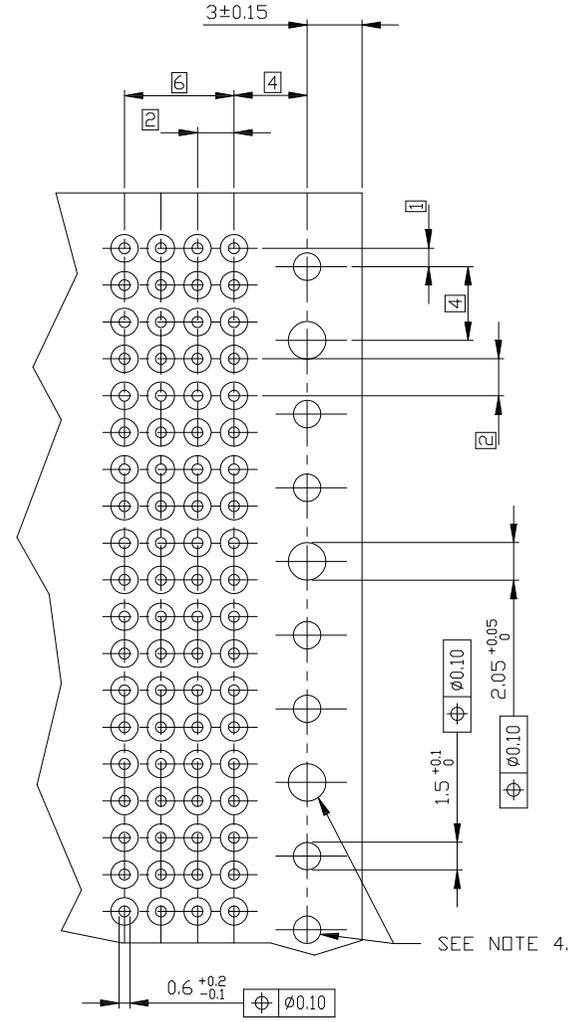
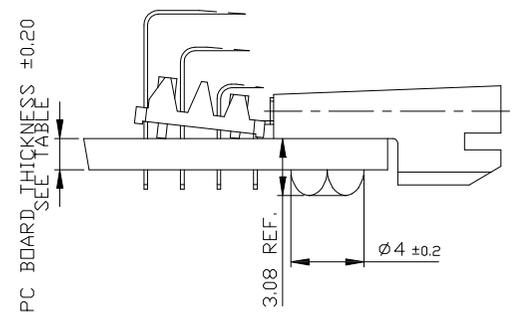
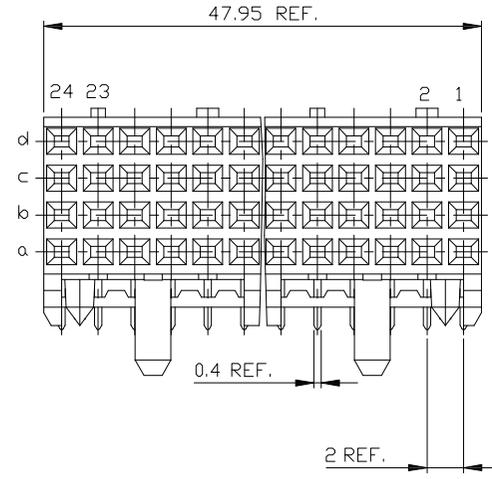
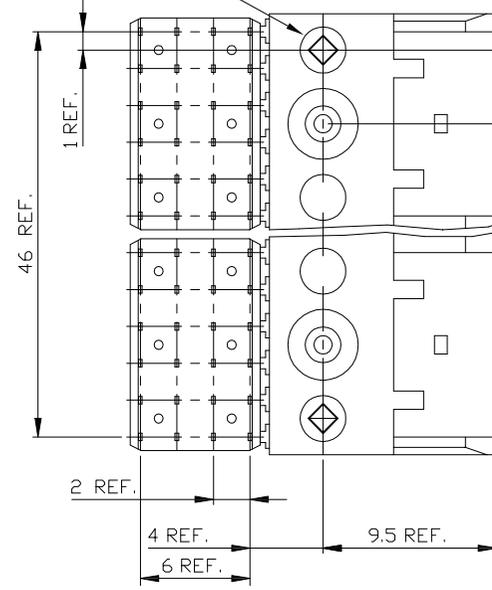


PC BOARD VERSIONS		
PRODUCTNR:	PCB THICKNESS	DIM"A"
70229-X01/X01LF	1.6	2.90
70229-X11/X11LF	2.4	3.53

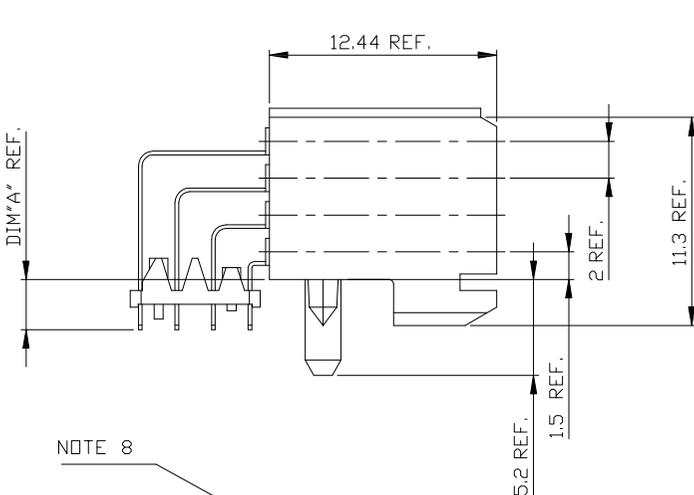

- NOTES:
- BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS  
FLAME RETARDANT ACC. UL 94-V0
  - TERMINAL MATERIAL: PHOSPHOR BRONZE.
  - PLATING SOLDER TAILS 2-8  $\mu$ m SnPb 90-97 OR 2-8 鍍 PURE Sn
  - INDICATED HOLES ARE UNPLATED.
  - PRODUCT MARKING: PART NUMBER & BATCH ID.
  - THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
  - THE HOUSING WILL WITHSTAND EXPOSURE TO 260 DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.
  - DIAMOND LOCATION PEG ARE ONLY EXISTED ON THE BOTH SIDES OF PRODUCT.

PLATING CONTACT AREA:

PRODUCT NR:	PERFORMANCE LEVEL:
70229-1YZ/1YZLF	TELCORDIA CO
70229-2YZ/2YZLF	CUSTOMER SPECIAL
70229-3YZ/3YZLF	CUSTOMER SPECIAL

mat'l. code		tolerances unless otherwise specified		CUSTOMER COPY		FCJ	
K	DG04-0104	Clu	041221	linear		projection	title
L	DG06-0477	Cenh	11/20/06	angles		RA FEMALE SIGNAL	STB 48 mm VERSION
M	DG07-0168	Cenh	05/08/07			product family	METRAL(tm)
N	DG09-0068	Cenh	06/06/09	dir	Avan Zanten	900918	code
				engr	H. Bouwknegt	940308	213
H	V00578	LLA	000316	chr	A van Zanten	900918	sheet
J	V00847	LLA	000530	app	H van Voensel	900918	1 of 3
sheet	revision	N	N	N	N	scale	5:1
index	sheet	1	2	3		A2	70229







All rights strictly reserved. Reproduction or issue in any form without written authority from the proprietor. Property of FCI bv. © FCI bv.



Tous droits strictement réservés. Reproduction ou communication à des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriété de FCI bv. © FCI bv.

All rights strictly reserved. Reproduction or issue to third parties in any form  
 whatsoever is not permitted without written authority from the proprietor.  
 Tous droits strictement réservés. Reproduction ou communication à des tiers  
 interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire.  
 © FCI B.V.

PC BOARD VERSIONS		
PRODUCTNR:	PCB THICKNESS	DIM"A"
70229-X02/X02LF	1.6	2.90
70229-X12/X12LF	2.4	3.53

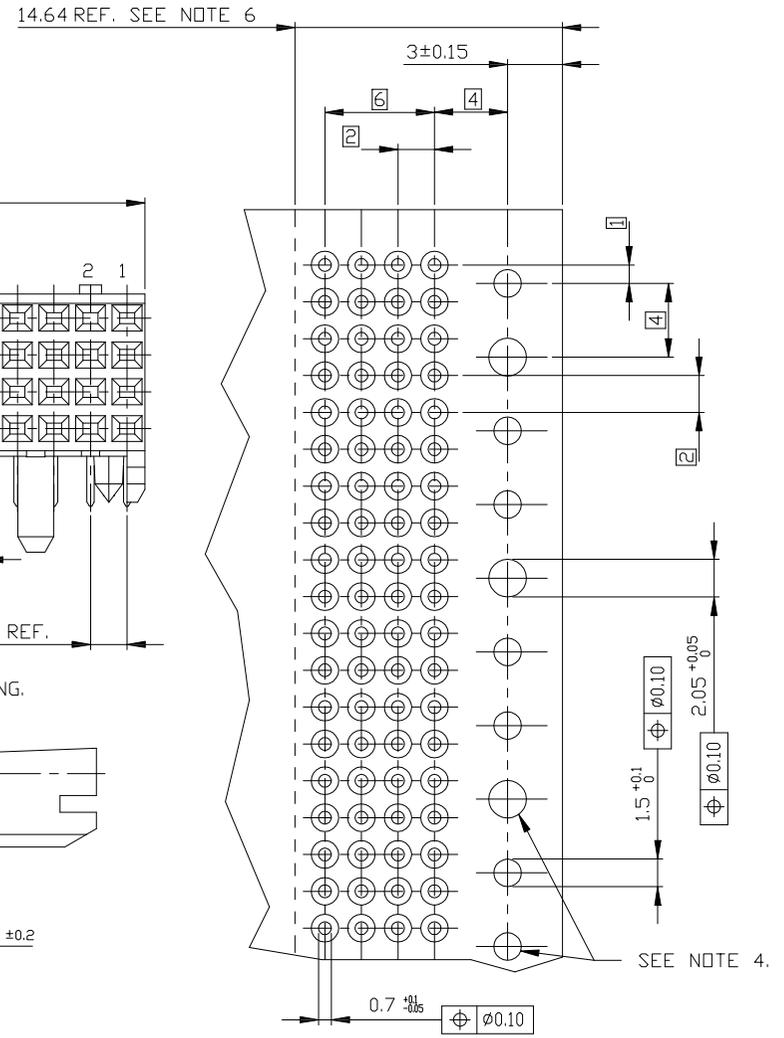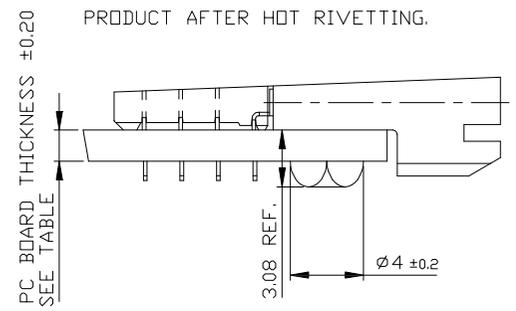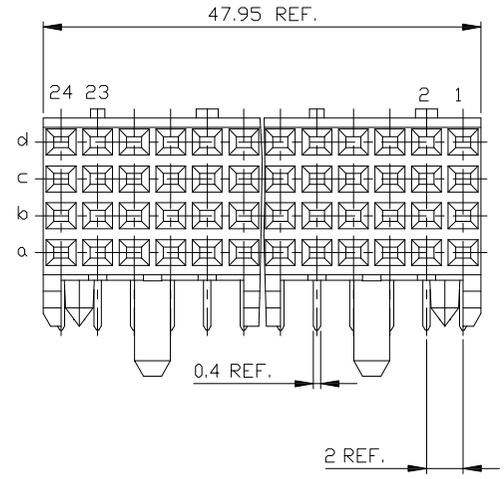
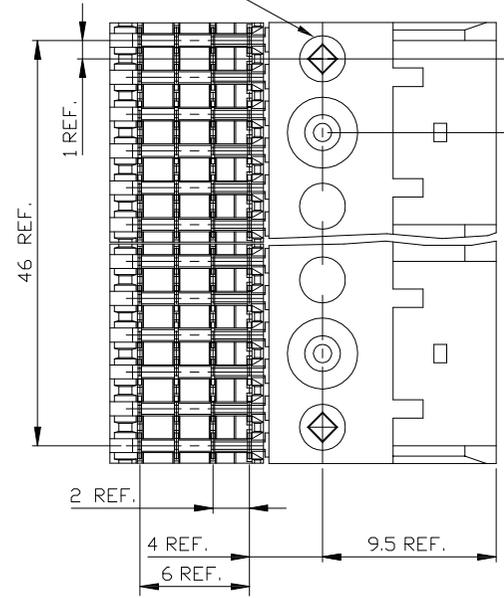
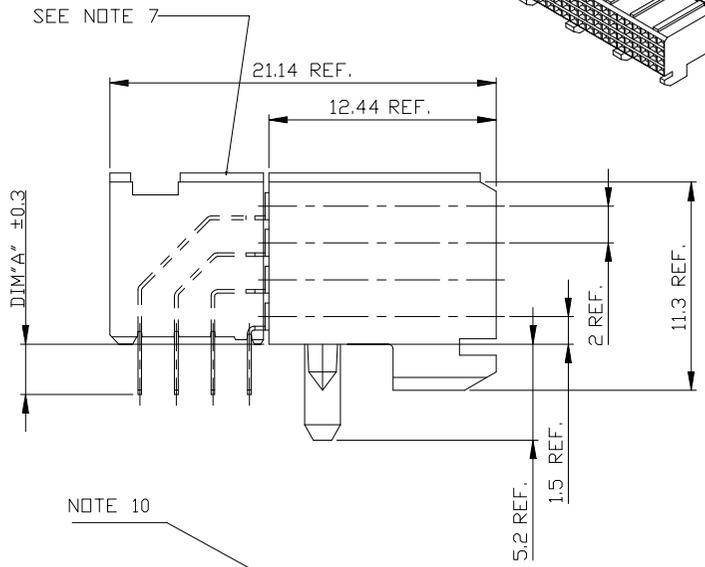



- NOTES:**
- BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS  
FLAME RETARDANT ACC. UL 94-V0
  - TERMINAL MATERIAL: PHOSPHOR BRONZE.
  - PLATING SOLDER TAILS 2-8 µm SnPb 90-97 OR 2-8 鍍 PURE Sn
  - INDICATED HOLES ARE UNPLATED.
  - PRODUCT MARKING: PARTNUMBER & BATCH ID.
  - SET BACK FOR PRESS BLOCK.
  - TOP SURFACE OF PRESS BLOCK MAY EXTEND UP TO 0.4MM HIGHER THAN HOUSING. THIS MAY AFFECT THE TAIL LENGTH BEFORE APPLICATION TO A BOARD
  - THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
  - THE HOUSING WILL WITHSTAND EXPOSURE TO 260DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.
  - DIAMOND LOCATION PEG ARE ONLY EXISTED ON THE BOTH SIDES OF PRODUCT.


PLATING CONTACT AREA:	
PRODUCT NR:	PERFORMANCE LEVEL:
70229-1YZ/1YZLF	TELCORDIA CO
70229-2YZ/2YZLF	CUSTOMER SPECIAL
70229-3YZ/3YZLF	CUSTOMER SPECIAL

mat'l. code		tolerances unless otherwise specified		CUSTOMER COPY			
l	n	ec	nd	date	linear	projection	title
						RA FEMALE SIGNAL	RA FEMALE SIGNAL
						STB 48 mm VERSION	STB 48 mm VERSION
						product family	METRAL(tm)
						size	no
						scale	51
						A2	70229
sheet	revision						
index	sheet						
							213
							sheet
							2 of-

PC BOARD VERSIONS		
PRODUCTNR:	PCB THICKNESS	DIM"A"
70229-X03/X03LF	1.6	2.90
70229-X13/X13LF	2.4	3.53

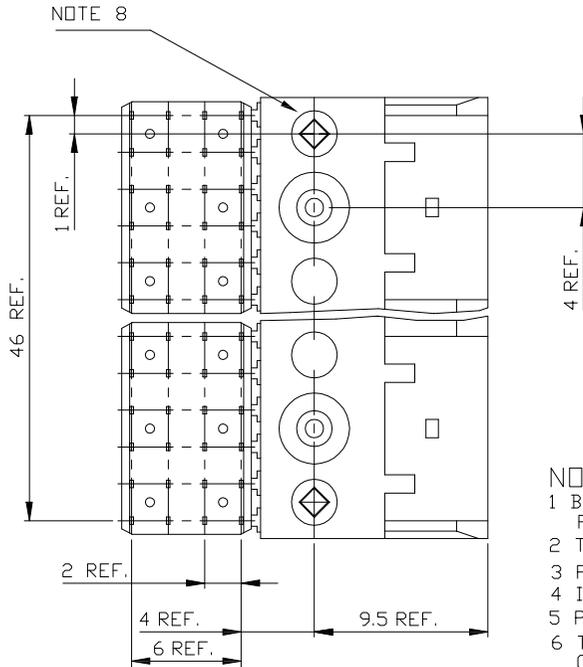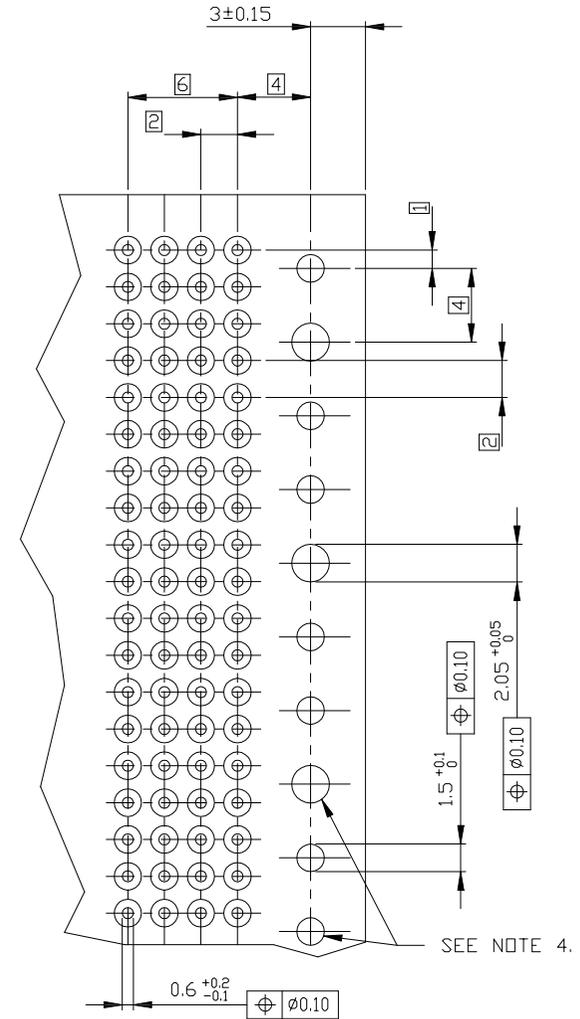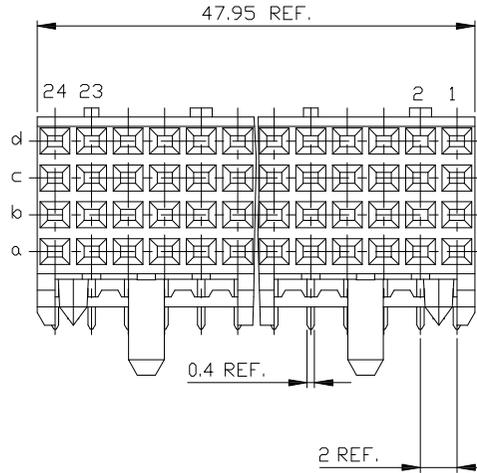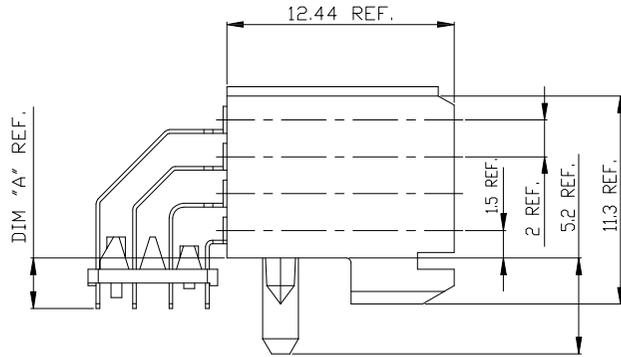

PRODUCT AFTER HOT RIVETTING.

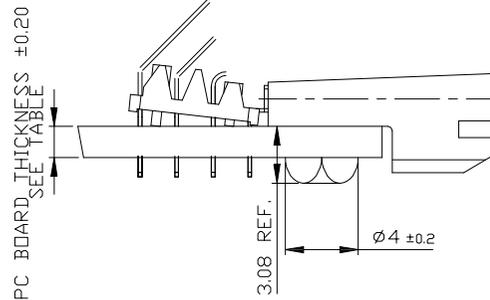

NOTES:

- BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS  
FLAME RETARDANT ACC. UL 94-V0
- TERMINAL MATERIAL: PHOSPHOR BRONZE.
- PLATING SOLDER TAILS 2-8 um SnPb 90-97 OR 2-8 um PURE Sn
- INDICATED HOLES ARE UNPLATED.
- PRODUCT MARKING: PART NUMBER & BATCH ID.
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.
- DIAMOND LOCATION PEG ARE ONLY EXISTED ON THE BOTH SIDES OF PRODUCT.

RECOMMENDED HOLE PATTERN,  
COMPONENT SIDE.

PLATING CONTACT AREA:

PRODUCT NR:	PERFORMANCE LEVEL:
70229-1YZ/1YZLF	TELCORDIA CO
70229-2YZ/2YZLF	CUSTOMER SPECIAL
70229-3YZ/3YZLF	CUSTOMER SPECIAL

mat'l code		tolerances unless otherwise specified		CUSTOMER COPY		FCJ	
ltn	ecn	nddr	date	linear	projection	title	www.fcdconnect.com
					⊕	RA FEMALE SIGNAL	
				angles		STB 48 mm VERSION	
				dr	Heaven Cen	11/20/06	product family METRAL(tm)
				enfr	Collins Lu	11/20/06	code 213
				chr	Beer Fu	11/20/06	size/wg no
				appd	Joseph Hsia	11/20/06	scale 5:1
sheet index	revision						A2
							70229
							sheet 3 of-

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI:](#)

[70229-102LF](#)